

# PH Pew Heaters

CONVECTION HEATERS



PH65



PH45



PH30

PH Series - ideal for unobtrusive installation under a church pew

- An economic means of heating a church congregation
- Minimal pre-heating required ensuring low running costs
- Visually unobtrusive

## Features

- Robust all-steel construction
- Dark brown paint finish
- Fixed directly to a pew's backboard or mounted on floor or suspension brackets
- 20mm cable knockouts at both ends for electrical connection
- External guard not required



Heater Range		
Model	Length (mm)	kW
PH30	525	0.3
PH45	702	0.45
PH65	948	0.65

Heater Technical Data						
Model	kW	Volts	Dimensions (mm)			Weight (kg)
			L	D	H	
PH30	0.3	230	525	58	168	2.5
PH45	0.45	230	702	58	168	3.2
PH65	0.65	230	948	58	168	4.2



PHF optional floor brackets




PHB optional suspension brackets

## Optional Brackets (for pews without backboards)

Type	Description	Model
Bracket	Floor (pair) assembled height 204mm	PHF
Bracket	Suspension (pair) assembled height 290mm	PHB

Pew Heater Section Table		
Space Between Seat Supports (mm)		Recommended Heater
Minimum	Maximum	
600	750	PH30
750	1000	PH45
1000	1500	PH65
1500+		Multiple Heaters

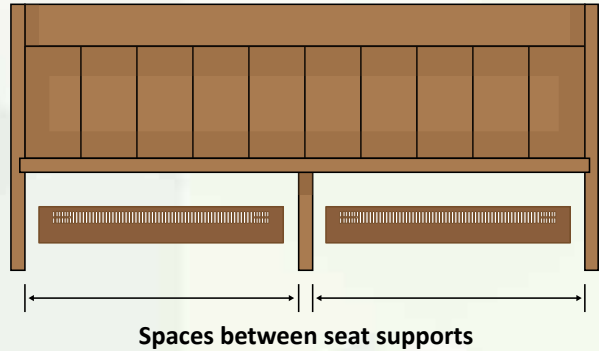

Pew heaters in a Gloucestershire church installed with suspension brackets



Pew heaters keeping a congregation warm in a Norfolk Church



Pew heaters providing economic heating in St James Church, Egerton, Kent