

TEST RECORD SHEET											
		FIRST YEAR		SECOND YEAR		THIRD YEAR		FOURTH YEAR		FIFTH YEAR	
MONTH	TEST										
		SIGNED	DATE	SIGNED	DATE	SIGNED	DATE	SIGNED	DATE	SIGNED	DATE
1	FUNCTIONAL										
2	FUNCTIONAL										
3	FUNCTIONAL										
4	FUNCTIONAL										
5	FUNCTIONAL										
6	1 HOUR										
7	FUNCTIONAL										
8	FUNCTIONAL										
9	FUNCTIONAL										
10	FUNCTIONAL										
11	FUNCTIONAL										
12	3 HOUR										

Installed by:

Installation date:

Contact number:

**ML** Accessories Limited  
 ACCESSORIES LTD LU5 5TA  
[www.mlaccessories.co.uk](http://www.mlaccessories.co.uk)

MLA -SB02 15 V1

## INSTALLATION & MAINTENANCE MANUAL EMLED2



IP65 3W LED EMERGENCY BULKHEAD

230V  
50Hz

IP  
65

**ML** Accessories Ltd



54

## GENERAL INSTRUCTIONS:

These instructions should be read carefully and retained after installation for further reference and maintenance.

## SAFETY:


Installation of this luminaire should only be carried out by a qualified electrician or competent person to the current IEE Wiring Regulations (BS7671).

- Before installation/maintenance ensure that all mains supply to the luminaire is switched off, and the circuit fuses are removed or switched off
- Check the total load on the circuit, including when this luminaire is fitted, does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress of Protection) rating of this luminaire when deciding the location for installation
- This product is class I rated and must be earthed
- Please recycle this unit
- This product is non-dimmable

## INSTALLATION:

- Provide a suitable power supply to the required position of the luminaire
- Unfasten the screws at each end of the luminaire and remove diffuser and set aside
- This luminaire can be wall or ceiling mounted
- Mark the location of the fixing holes. Ensure the correct fixings are used for the wall type
- To access the wiring terminals use a small slotted screwdriver to release the hinged gear tray
- Make an entry hole in the luminaire and feed through the cable. Ensure the correct IP rated connector is used to maintain the IP rating

For non-maintained wiring:

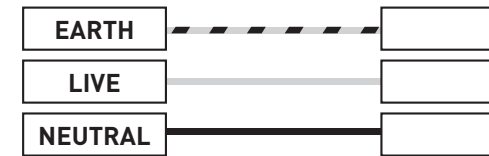

For maintained wiring:



Diagrams for illustration only

- Check all wiring is correct and secure
- Refit the diffuser with the 2 screws securely
- Reconnect the power and check that the green LED indicator is illuminated indicating that the battery is charging. Charge for 30 minutes and disconnect the mains, the luminaire should illuminate in emergency mode. The product should then be charged for a full 24 hours before being fully operational, a 3 hour full test should then be completed

## GENERAL

- The LED lamps fitted in this product are non-replaceable. The unit should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist
- Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the fitting

## WARRANTY

This product has a warranty of 3 years from date of purchase (excluding battery). Failure to install this product in accordance with the current edition of the IEE Wiring Regulations, improper use, or removal of the batch codes, will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.