


8. Replace the cover securing with the cover screws and screw caps. (fig.4)

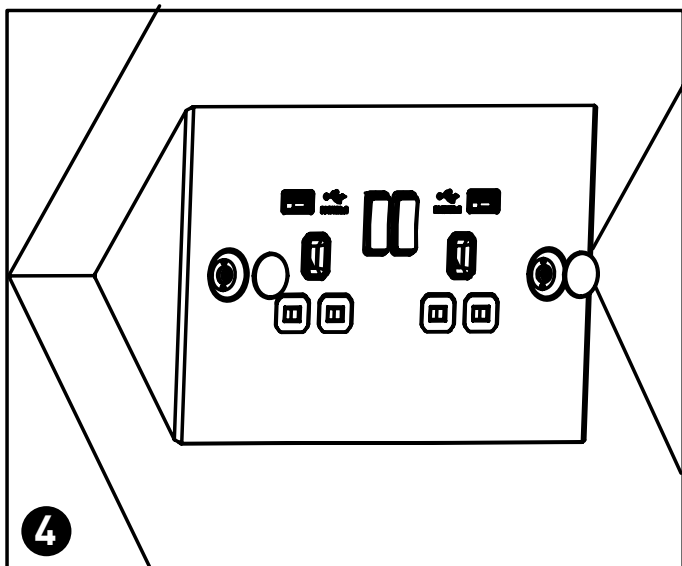

Test for correct operation

TROUBLESHOOTING

This socket contains a short circuit and overload protection feature. If there is no power from the USB socket, unplug the connected device and check to ensure the USB socket and USB device have not come into contact with water, liquid or debris and the cable to the device is not damaged. With no device connected to the USB socket it will automatically reset and be ready for use

We recommend using high quality USB charging cables as low cost options may cause compatibility issues and may inhibit your device's ability to charge efficiently



INSTALLATION & MAINTENANCE MANUAL SK002



13A 2G MOUNTABLE SWITCHED SOCKET WITH DUAL USB CHARGER

230V
50Hz



IP
20



ML Accessories Limited
LU5 5TA
www.mlaccessories.co.uk

09-14 V1 – BT



RoHS
COMPLIANT



11

CONTENTS

- 1 x 13A 2G mounting switched socket with dual USB charger
- 1 x fixing pack
- 1 x installation guide

PLEASE READ THESE BEFORE COMMENCING INSTALLATION

- This is a Class I product and must be earthed
- These instructions should be read carefully and retained after installation for further reference and maintenance

SAFETY

- Before installation/maintenance, ensure the mains supply is switched off and the circuit fuses are removed or circuit breakers switched off
- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations and current Building Regulations. If in any doubt, consult a qualified electrician
- 230V 50Hz
- Do not overload this accessory or subject it to conditions outside its rating
- Please recycle
- For indoor use only

SPECIFICATION

- 220-240V ~50-60Hz
- 13A

USB charger specification

- Output voltage: 5V DC
- Output current: Max. 2100mA
- Caution: the USB sockets are designed for charging portable USB devices only



OPERATION

- On/Off switches control the 13A sockets only
- USB charger sockets are independent of the 13A sockets and cannot be switched off

MAINTENANCE

- Ensure that the mains supply is switched off and the circuit fuses are removed or circuit breakers switched off
- To maintain the finish of this product, periodically wipe over with a dry soft cloth

INSTALLATION

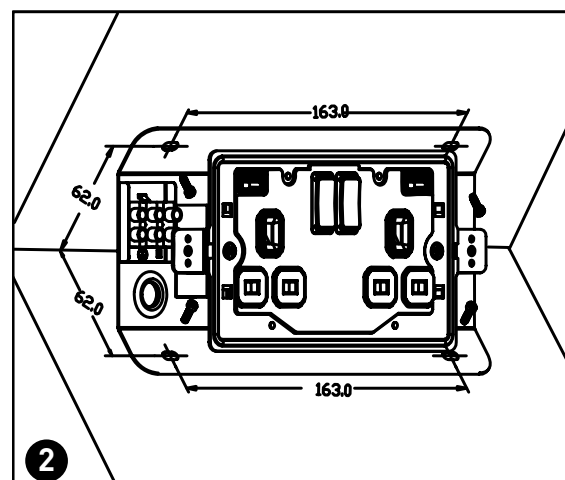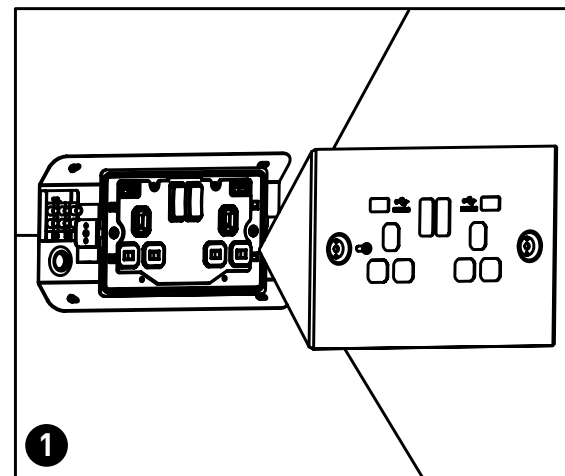

1. Carefully prize off the screw caps with a flat-head screwdriver
2. Unscrew the cover screws and remove the front cover (fig.1)
3. Place the socket in position and mark the 4 fixing holes as shown in (fig.2)
4. Drill the holes for the fixings ensuring not to infringe with any joists, gas/water pipes or electrical cables that may be hidden behind the surface
5. Thread the mains cable through the cable entry hole and rubber grommet provided
6. Secure the unit to the mounting surface. Subject to the surface foundation material, please ensure the correct fixings are used
7. Connect the supply wires to the terminal block (fig.3). This product must be earthed. Connect the mains cable to the terminal block provided ensuring correct polarity is observed. BROWN- LIVE. BLUE-NEUTRAL. GREEN/YELLOW-EARTH

