


**INSTALLATION & MAINTENANCE MANUAL
SK004**

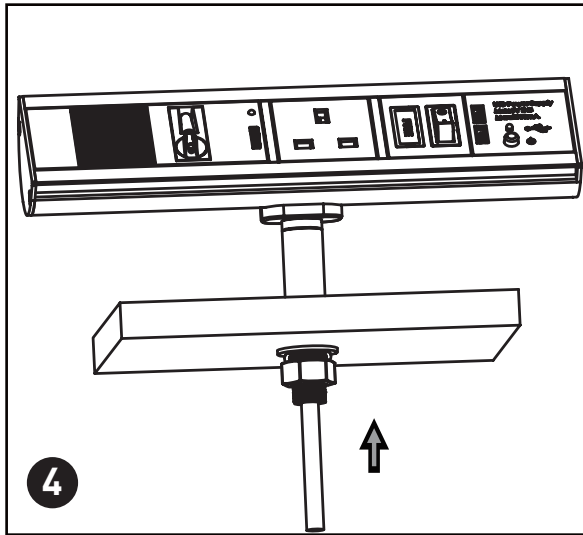

6. Connect the mains cable to a suitable fused spur unit or 13A plug (not included), (fig.4).
This product must be earthed. Ensure correct polarity is observed
BROWN- LIVE. BLUE-NEUTRAL. GREEN/YELLOW-EARTH
7. Check all wiring is correct and secure
8. Test for correct operation

TROUBLESHOOTING

This socket contains a short circuit and overload protection feature. If there is no power from the USB socket unplug the connected device. Check to ensure the USB socket and USB device have not come into contact with water, liquid or debris and the cable to the device is not damaged. With no device connected to the USB socket, it will automatically reset and be ready for use

We recommend using high quality USB charging cables as low cost options may cause compatibility issues and may inhibit your device's ability to charge efficiently



13A 2G DESKMOUNT SOCKET WITH DUAL USB CHARGER & SPEAKER SYSTEM



CONTENTS

- 1 x 13A 2G deskmount socket with dual USB charger and speaker system
- 1 x fixing pack
- 1 x installation guide

PLEASE READ THESE BEFORE COMMENCING INSTALLATION

- This is a Class I product and must be earthed
- These instructions should be read carefully and retained after installation for further reference and maintenance

SAFETY

- Before installation/maintenance, ensure the mains supply is switched off and the circuit fuses are removed or circuit breakers switched off
- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations and current Building Regulations. If in any doubt, consult a qualified electrician
- 230V 50Hz
- Do not overload this accessory or subject it to conditions outside its rating
- Please recycle
- For indoor use only

SPECIFICATION

- 220-240V ~50-60Hz
- 13A
- Minimum mounting thickness 14mm
- Maximum mounting thickness 50mm
- Cut-out diameter 18mm

USB charger specification

- Output voltage: 5V DC
- Output current: Max. 2100mA
- Individual switch for power on/off
- LED Indicator for power on

Speaker specification

- Output power: Max. 2W
- Sensitivity: : L/R 380MV
- SNR: →80dB
- Frequency range: 280Hz-16KHz
- Audio connector: retractable 3.5mm headphone connector (suitable for use with all devices with a 3.5mm headphone socket)


OPERATION

- Separate on/off switch for 13A sockets & USB charger sockets


MAINTENANCE

- Ensure that the mains supply is switched off and the circuit fuses are removed or circuit breakers switched off
- To keep the finish of this product, periodically wipe over with a dry soft cloth


INSTALLATION

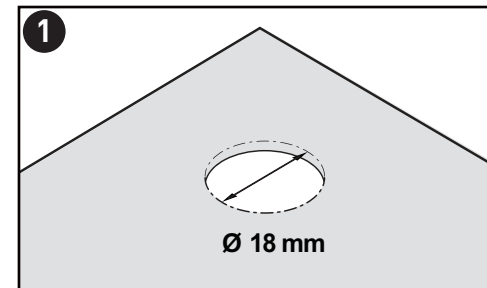

1. Drill an 18mm diameter hole in the work surface. Mounting board thickness must be a minimum of 14mm and maximum of 50mm (fig.1)

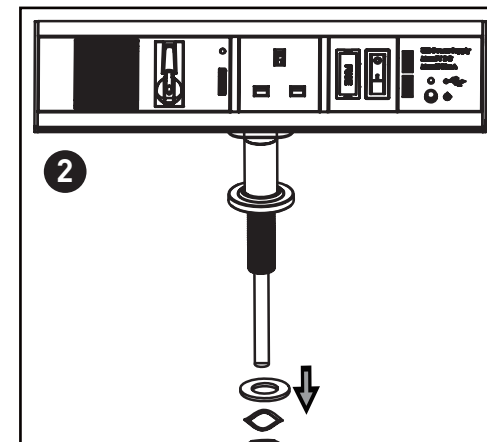

2. Release the fixing washers and nut from threaded mounting base (fig. 2)

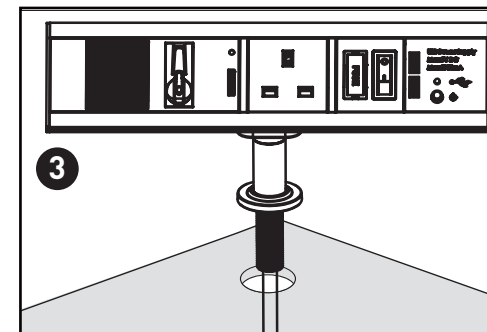

3. Insert the cable and product into the prepared hole (fig.3)
4. Slide the fixing washers and nut over the cable ensuring they are in the correct order (fig.2)
5. Securely tighten the nut