

## Girona Panel Heater (Black) - Series C



## Product Description

GFPBE features intuitive user controls, allowing the programming of multiple 7-day timer profiles via a backlit LCD display and

## Key Features


- Modern panel design with louvered upward facing grille for optimum heat circulation
- Customisable heating with four time and temperature settings per day.
- Adaptive start pre-heating and open window detection auto-shutdown
- Slimline design that covers traditional panel heater fixing marks
- Aesthetics to compliment storage heater ranges
- Smartphone app controllable via the Dimplex Control system\*

*\*Requires additional hardware, sold separately. A Dimplex Hub and RFM 'Radio Frequency Module' device are required for this product to connect to the Dimplex Control system and be controlled via the Dimplex Control smartphone app*

## Technical Details

|                             |   |
|-----------------------------|---|
| <b>Controls</b>             | Digitally controlled, Electronic Thermostat accurate to ( $\pm 0.2^{\circ}\text{C}$ ). Set-point range (7-30 $^{\circ}\text{C}$ )<br><br><b>Timer modes:</b> 7 Day Programmable User Timer, Out All Day, Home All Day<br><br><b>Continuous heat modes:</b> Eco, Manual, Frost Protect. <b>Additional modes:</b> Away, Boost, Setback, Runback |
| <b>Controller UI</b>        | <ul style="list-style-type: none"> <li>• Graphical display with RGB backlight</li> <li>• Capacitive buttons with audio feedback</li> <li>• User replaceable battery (Coin-Type)</li> </ul>  |
| <b>Controller Functions</b> | <ul style="list-style-type: none"> <li>• Open window detection</li> <li>• Adaptive-start,</li> <li>• Advance time period</li> <li>• Bluetooth for software updates</li> <li>• Child Lock &amp; Heater Lock (PIN-based)</li> </ul>   |
| <b>Construction</b>         | <ul style="list-style-type: none"> <li>• Durable epoxy-polyester powder coated steel casing with louvered upward facing grille</li> <li>• Advanced controls with cap-sense technology for total flexibility of heating</li> </ul>   |
| <b>Element</b>              | Compact, finned, mineral filled sheathed element  |
| <b>Installation</b>         | <ul style="list-style-type: none"> <li>• 1 H-frame wall bracket for easy fixing</li> </ul>  |
| <b>Safety</b>               | <ul style="list-style-type: none"> <li>• Thermal cut-out. Auto reset type</li> <li>• Overheat detection</li> </ul>  |
| <b>IP Rating</b>            | IP24  |
| <b>Battery Backup</b>       | 1 x CR2032 Lithium Manganese Dioxide 3V coin cell battery to backup real time clock (weight 3g). Battery life > 5 years.  |
| <b>Supply</b>               | 1.3 metres fitted, 3 core for fused spur installation, 1/N/PE ~230-240 V, 50Hz Class I, with earth wire   |
| <b>Colour / Finish</b>      | Metal Chassis, Air Outlet Grille & Control Moulding - Traffic White (RAL 9016)  |

## Dimensions

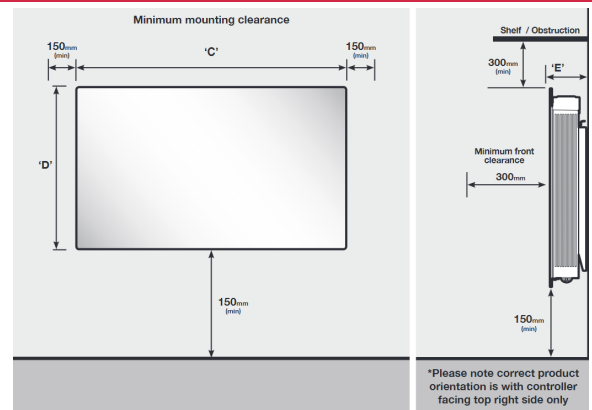

| Model/Item No.(EAN-Code 5011139+Item No.) | 090904 | GFP050BE | 090911 | GFP075BE | 090928 | GFP100BE | 090935 | GFP150BE | 090942 | GFP200BE |
|---|--------|----------|--------|----------|--------|----------|--------|----------|--------|----------|
| Output (kW)                               | 0.50   |          | 0.75   |          | 1.00   |          | 1.50   |          | 2.00   |          |
| Height 'D' (mm)                           | 565    |          | 565    |          | 565    |          | 565    |          | 565    |          |
| Width 'C' (mm)                            | 530    |          | 530    |          | 700    |          | 770    |          | 940    |          |
| Depth 'E' (mm)                            | 107    |          | 107    |          | 107    |          | 107    |          | 107    |          |
| Weight (Kg)                               | 13.4   |          | 13.4   |          | 16.9   |          | 18.6   |          | 22.1   |          |
| <b>Packaging Details</b>                  |        |          |        |          |        |          |        |          |        |          |
| Height (mm)                               | 670    |          | 670    |          | 670    |          | 670    |          | 670    |          |
| Width (mm)                                | 590    |          | 590    |          | 764    |          | 837    |          | 1000   |          |
| Depth (mm)                                | 182    |          | 182    |          | 182    |          | 182    |          | 182    |          |
| Packed Weight (Kg)                        | 15.1   |          | 15.1   |          | 19     |          | 20.7   |          | 24.4   |          |
| Ti  | 10     |          | 10     |          | 7      |          | 7      |          | 6      |          |
| Hi  | 3      |          | 3      |          | 2      |          | 2      |          | 2      |          |
| Pallet Quantity (2.4m high)               | 30     |          | 30     |          | 14     |          | 14     |          | 12     |          |

## Warranty & Approvals

|                          |  |
|--------------------------|--|
| <b>Approvals</b>         | UKCA, CE, BEAB                                     |
| <b>Warranty</b>          | 2 Years  |
| <b>Country of Origin</b> | United Kingdom                                     |
| <b>Manufacturer</b>      | Glen Dimplex Heating & Ventilation (GDC Group Ltd) |