



Installation Sheet



UK CA CE



220-240V

LED LITE™

LTG2CCT

IP65 Round Bulkhead

CCT Changeable / Tri Wattage

25W/30W/35W

25W/30W/35W

3000K/4000K/6500K

25W/30W/35W

3000K/4000K/6500K

25W/30W/35W

3000K/4000K/6500K

25W/30W/35W

3000K/4000K/6500K

These instructions should be read carefully and retained after installation for further reference and maintenance.


**SAFETY**

- Before installation, ensure that the mains supply to the luminaire is switched off and the circuit supply fuses are removed or circuit breaker turned off.
- It is recommended that a qualified electrician is consulted or used for the installation of this luminaire and installed to the current edition of the IEE wiring regulations.
- Check that the total load on the circuit, including this luminaire, does not exceed the rating of the circuit cable, fuse or circuit breaker.


**RATINGS**

- This luminaire is of Class II construction and it does not require an earth connection
- IP65 rated
- F marked, suitable for installation on normal flammable surfaces
- Working situation: -15°C to 40°C
- 220-240V AC rated
- CE Approved


**DIMENSIONS:**

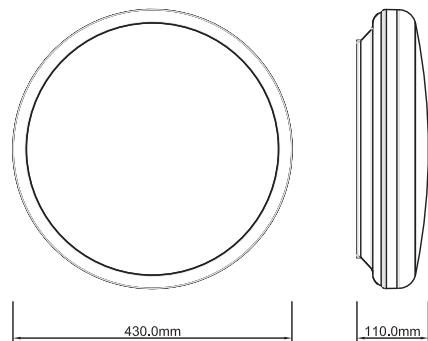

**WIRING DIAGRAM:**

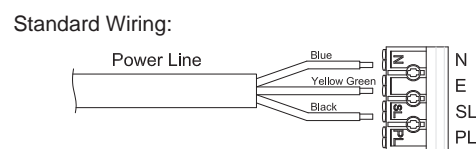


**When used with Quick Plug-in LTEM Emergency Pack:**




**CCT & POWER ADJUSTABLE:**

Switch off the mains supply before changing power or CCT

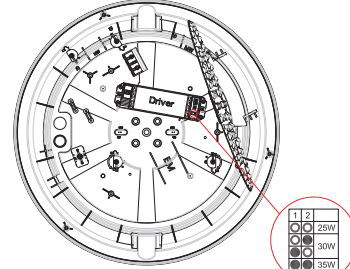

Open the LED gear tray and use the driver DIP switch to change the power

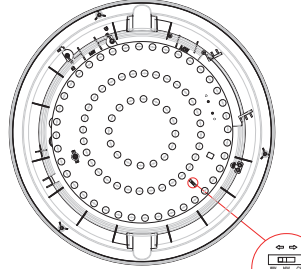


Use the LED gear tray switch to change the CCT temperature

**TECHNICAL SPECIFICATIONS:**


- Input Voltage: 220-240V/AC
- Tri-Power Selectable: 25W/30W/35W
- Light Output: 25W – 2600lm  
30W – 3150lm  
35W – 3600lm
- CCT Changeable (switch):  
3000K/4000K/6500K
- CRI > 80
- IP Rating: IP65
- Protection Class: Class II
- Housing: PC Body & Diffuser
- Operating Temp.: -15°C to +40°C
- Dimensions: Diameter 430mm / depth 110mm
- Warranty: 5 years

**INSTALLATION INSTRUCTIONS:**


Switch off the mains supply before installation.

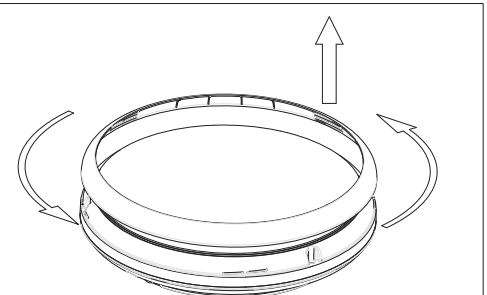


Remove the clip-on trim ring from the Galaxy body.

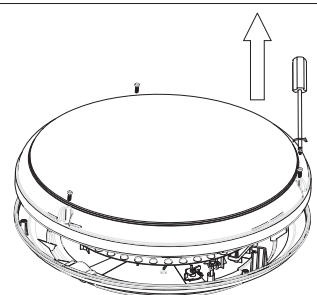


Remove the diffuser screw and separate it from the base.

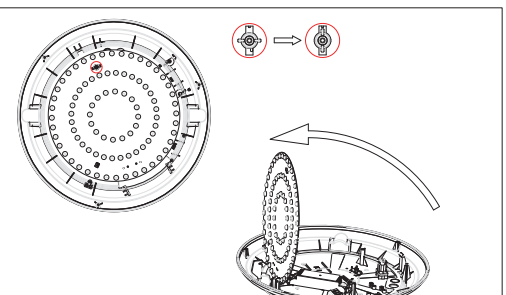


Turn the butterfly button to open the hinged gear tray to allow access to the connections.

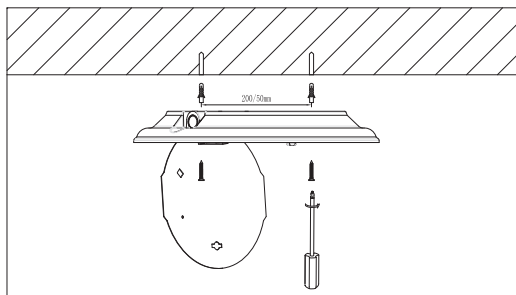


Select an appropriate flat installation area. Securely attach the base to the solid surface using appropriate fixings.

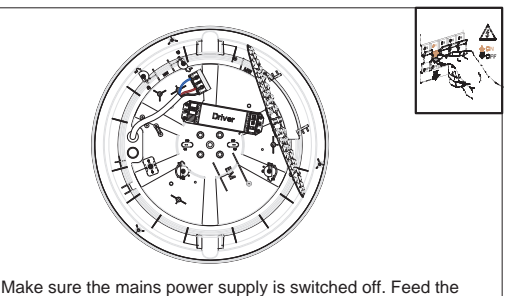


Make sure the mains power supply is switched off. Feed the supply cable into the luminaire, ensuring the entry point is smooth or fitted with a grommet. Connect the cable to the terminal block following the wiring instructions.

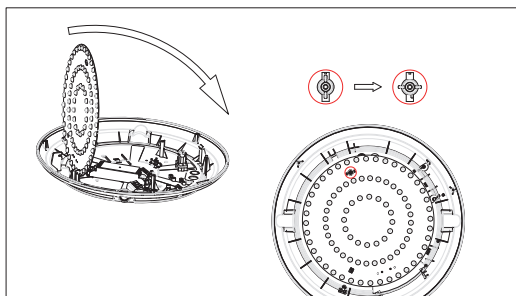

Close the hinged LED gear tray and turn the butterfly button to fix it into place.

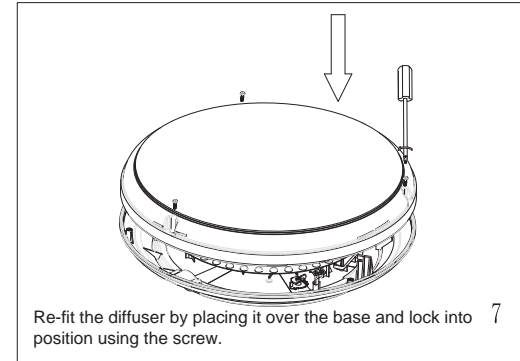

Re-fit the diffuser by placing it over the base and lock into position using the screw.

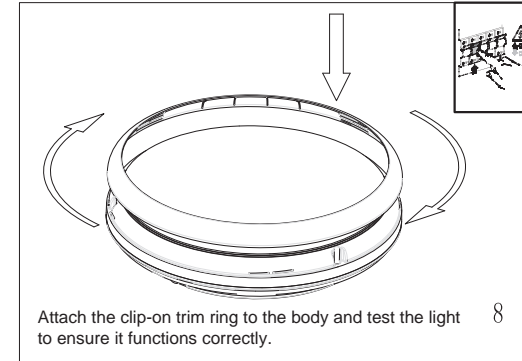


Attach the clip-on trim ring to the body and test the light to ensure it functions correctly.


**Emergency Pack (LTEM) and Microwave Sensor (LTMS) Installation Instructions**

Switch off the mains supply before installation.

**Emergency Pack (LTEM) Installation:**

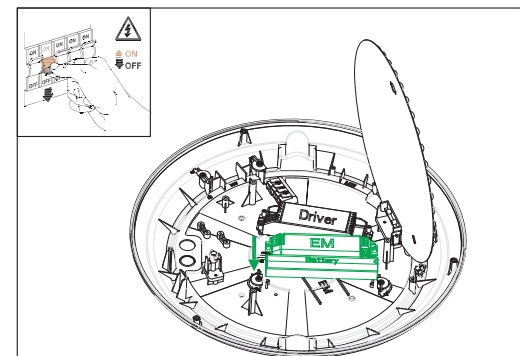


Insert the LTEM Emergency Pack module into the marked slot.

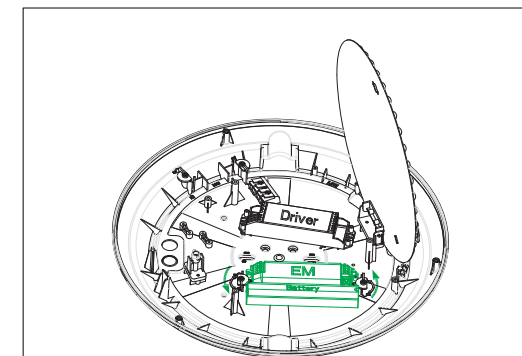


Turn and lock the fixing clip to secure the emergency pack module into place.

**Microwave Sensor (LTMS) Installation:**

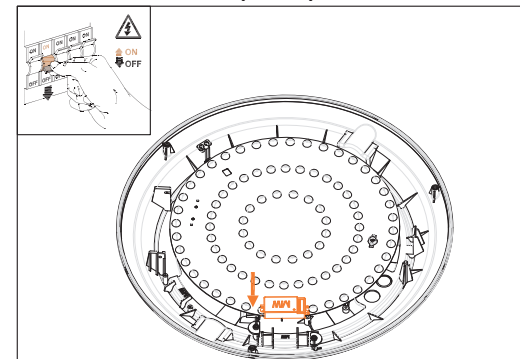


Insert the LTMS sensor module into the marked slot.

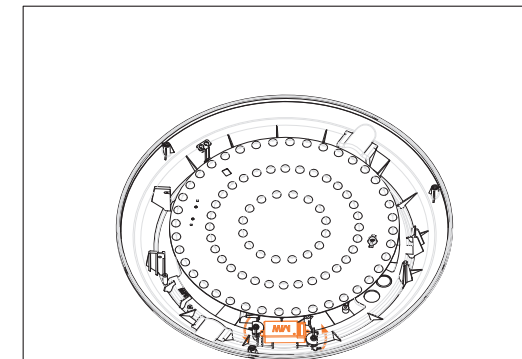


Turn and lock the fixing clip to secure the sensor module into place.

**Emergency Pack (LTEM) and Microwave Sensor (LTMS) Installation:**




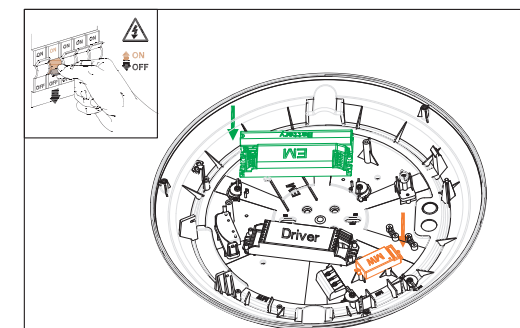


Insert the both LTEM Emergency Pack and LTMS sensor into the marked slots.

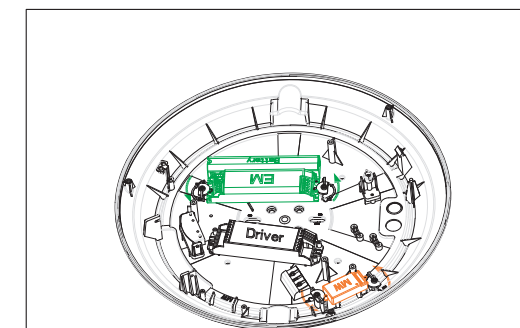

Turn and lock the fixing clips to secure the modules into place.

**LTEM & LTMS PLUG & PLAY INSTALLATION INSTRUCTIONS**

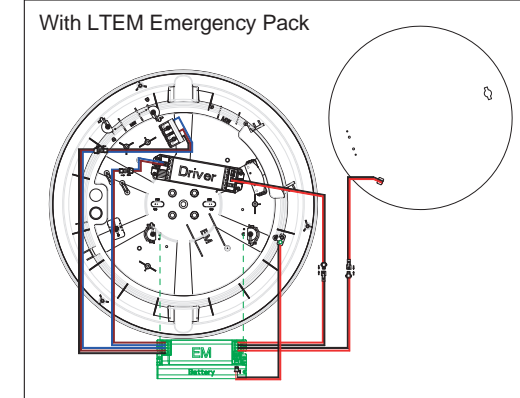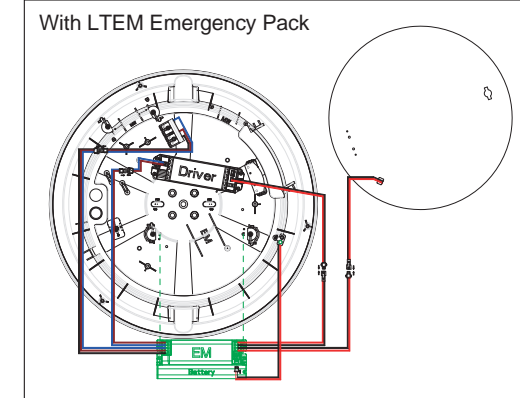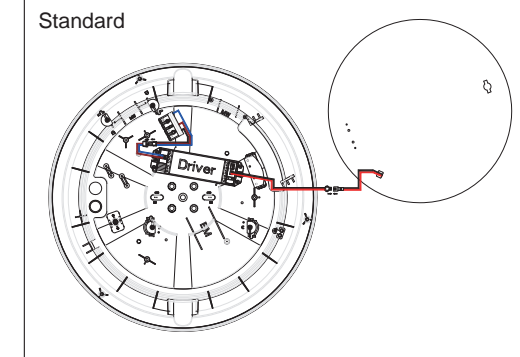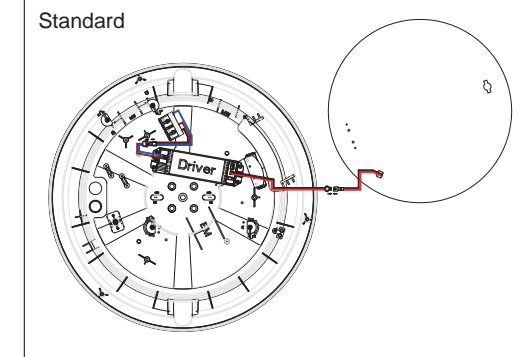

For further information visit [www.tlc-direct.co.uk](http://www.tlc-direct.co.uk)

LED LITE™