


# LED LITE™


## Energy Saving LED

# LED Emergency Inverter

## Emergency Inverter for LED Luminaires

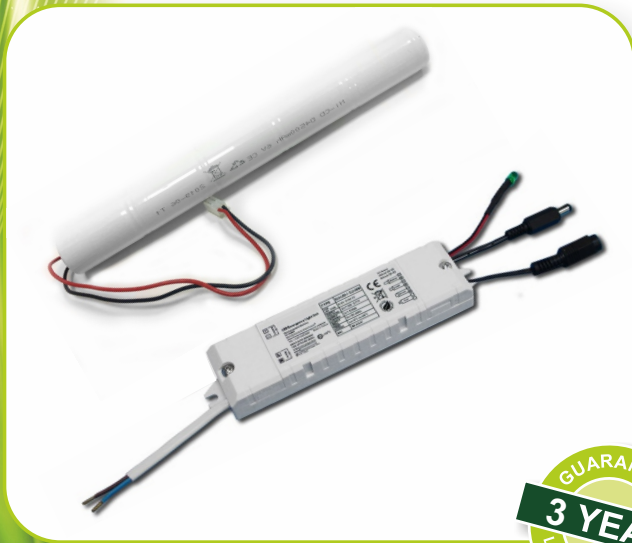

### Dimensions:



Product Code	LTEMLED
Package Type	Emergency Inverter
Input current	60 mA
Input frequency	50/60 Hz
Input voltage (VAC)	100 - 277 VAC
Output voltage	36 VDC
Charging Current	170mA to 350mA
CC Driver Rating	J1 - 350mA system J2 - 500mA system
Maximum Load	J1 - 7.5W / J2 - 11W
Battery	Ni-Cd Rechargeable
Battery Capacity	3000, 4500 mAh

### PACKING LIST

Individual Box	200 x 90 x 42 mm
Carton	380 x 215 x 230 mm
CTN/PCS	1/20

### Emergency Inverter Settings:

	--Inverter Settings--		--Battery Pack--		% Light output +/-	Duration on Emergency H:Min
	350 mA	500 mA	3000 mA	4500 mA		
LED Fire Rated Down Light	X		X		35%	8.25
LED Fire Rated Down Light		X	X		43%	5.15
LED Panel Light 50 watt		X		X	20%	4.30
LED Panel Light 50 watt	X			X	20%	6.05
LED Panel Light 40 watt	X			X	20%	4.00
LED Panel Light 40 watt		X		X	20%	3.15
24W UFO Downlight	X			X	23%	5.00
24W UFO Downlight		X		X	27%	4.08



## Battery for LTEMLED Emergency Inverter

Product Code	LTBAT3 / LTBAT45
Package Type	Ni-Cd Battery
Battery Voltage	6V
Battery Capacity	LTBAT3 - 3000 mAh LTBAT45 - 4500 mAh
Cell Type	LTBAT3 - C Cell LTBAT4.5 - D Cell

### PACKING LIST

Carton LTBAT3	380 x 300 x 130 mm
CTN/PCS	1/60
Carton LTBAT45	400 x 320 x 110 mm
CTN/PCS	1/30