

**Masterseal
Sentrysocket**

1:2



PRODUCT RANGE	
RCD protected switchsocket outlets	
30mA Active Control	
Single socket	56301 GRY
Single socket	56301 WHI
Double socket	56231 GRY
30mA Passive Control	
Double socket	56233 GRY

Compliance with EC Directives, Standards and approvals

All Sentrysockets comply with the following EC Directives and are CE marked:

Low Voltage Directive (73/23/EEC)
Electromagnetic Compatibility Directive (89/336/EEC)

Sentrysocket RCD Single Sockets also comply with the requirements of the following standards:

BS 7288: 1990 (1993)
BS 2011 Part 2.1 Db (Damp Heat - cyclic)
BS 2011 Part 2.1 Ka (Salt mist)
BS EN 50082-1

Sentrysocket RCD Double Sockets comply with BS 7288: 1990 (1993) and BS EN 61543: 1996 for EMC

Description

Sentrysocket provides a high level of protection against electrocution and gives further protection when used with appliances vulnerable to insulation damage, particularly when they are in damp environments or outdoors.

Sentrysocket, incorporating an RCD, is part of a complete range of fixed and portable wiring accessories and circuit protection devices suitable for use in domestic, commercial and industrial applications.

Active control circuits

Incorporate a 'Re-set' mechanism and are mains failure sensitive, ie they will function under all the normal conditions expected of an RCD, but will also trip in the event of a

power cut or a sudden, dramatic reduction in mains voltage. This makes them ideal for use where it would be hazardous for equipment to suddenly energise after return of mains power, such as use with rotating machinery and heat developing apparatus.

Passive control circuit

Incorporates a 'Stay-set' mechanism and is mains failure proof, ie it will function under all the normal conditions expected of an RCD and will not trip in the event of a power cut. This makes it suitable for use with freezers or in inaccessible or unmanned locations.

Features

- Suitable for most residential, commercial and light industrial applications.
- Active and passive control circuit applications
- Comply fully with current Wiring Regulations
- Double pole switching
- Flexible and versatile in use
- Ideal for use with equipment subject to wet weather or high humidity
- Part of a complete range of MK circuit protection devices
- They are a.c. and pulsating d.c. sensitive for residual current
- Enclosure IP56

Masterseal
Sentrysocket

2:2



TECHNICAL SPECIFICATION

Electrical

Rated Voltage:
240V a.c.

Current rating:
13A resistive

Rated tripping current
30mA and 10mA versions

Terminal capacity:
3 x 4mm²

Physical


Ambient operating temperature:
-5°C to +40°C

IP rating:
IP4X


Max. installation altitude:
2000 metres

Dimensions (mm)

Single and double sockets are identical in size and shape.
The following dimensions apply

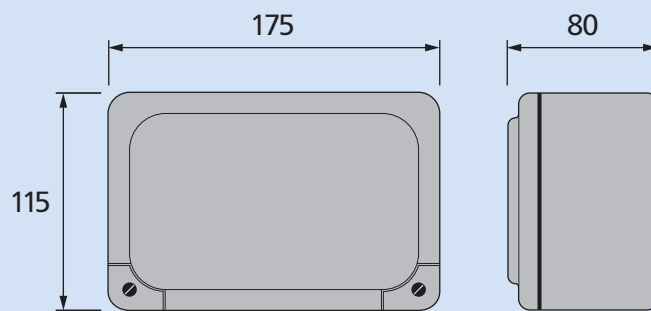

Fixing Dimensions

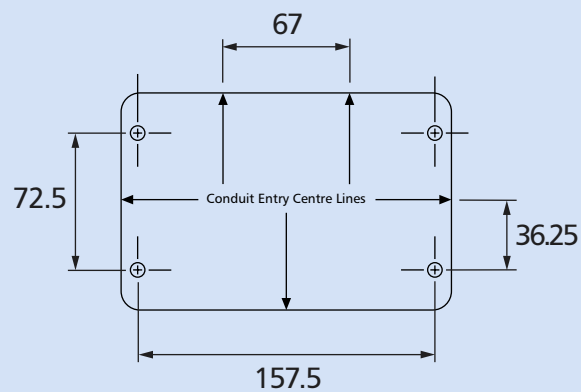

Masterseal products are suitable for surface mounting only.