

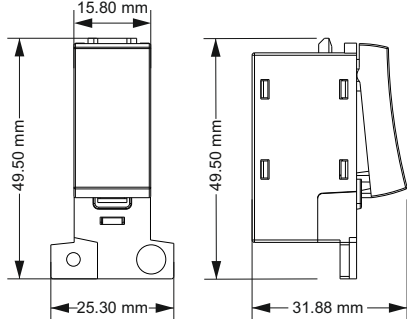


QUGDCL

Wireless Grid Switch Instructions 80*60mm

	 <p>QUGDCL Wireless Grid Switch Scolmore MiniGrid Faceplate Compatible*</p> <p>Installation Instructions</p> <div style="display: flex; justify-content: space-around;">       </div> <p><small>*compatible - means that these products will fit into the Scolmore faceplate. Scolmore does not supply or endorse or provide any support for these products. *Scolmore* and *MiniGrid* are acknowledged as trademarks of The Scolmore Group.</small></p>	<p>Read instructions carefully before installation</p>  <p>Wireless Grid Switch QUGDCL QUINETIC</p>	<p>Specifications Wireless Grid Switch Technical Parameters:</p> <p>Work Type: Push Button Power Source: Micro energy acquisition and self generating (no battery required) Number of Keys: 1 (1 gang) Control Distance: 25m (indoor) Communication Model: FSK Work Frequency: 433Hz Work Environment Temperature: -20°C ~ 55°C Control Method: Pairing with Quinetic Wireless Controller Life Time: ≥100000 times 3 Year Warranty</p>  <p><small>* Distance comes from Quinetic laboratory test result. The actual distance in practical use might vary due to environmental difference. NOTE: The grid metal plate or cover might reduce the control distance, as the metal will cause electromagnetic shielding that blocks the RF signal.</small></p>
--	---	---	--

<p>Wireless Grid Switch Operation:</p> <p>The Quinetic wireless grid switch is Scolmore MiniGrid faceplate compatible* with the Minigrid system and can be installed into Click Minigrid mounting plates. It can be used with the standard or with the dimming Quinetic receiving controller (see controller instructions for more details about pairing).</p> <p>Dimming Operation:</p> <p>When paired with dimming Quinetic receiving controllers the grid switch can also dim the lights: Pressing the switch quickly will turn the light ON/OFF. Keep the switch pressed to dim the light to the desired level. While the switch is pressed the lights will go down from 100%-0% and they will go up from 0-100% cyclically.</p> <p>Quinetic Switch and Controller Wireless System:</p> <p>The wireless Quinetic grid switch and wireless receiving controller can be paired in any combination: a controller can be controlled by a maximum of 10 separate switches, a switch can pair with an unlimited number of controllers.</p> <p><small>*compatible - means that these products will fit into the Scolmore faceplate. Scolmore does not supply or endorse or provide any support for these products. *Scolmore* and *MiniGrid* are acknowledged as trademarks of The Scolmore Group.</small></p>	<p>Installation Instructions:</p> <ol style="list-style-type: none"> 1. Ensure the mounting box is securely fixed to the wall. 2. The Quinetic Click Scolmore Minigrid switch module is easily and quickly mounted onto Click Minigrid plates using screws for fixing (Fig.1). 3. Ensure no conductors into the mounting box are pinched or trapped. 4. If necessary the modules can be removed by unscrewing them out from the grid plate . 5. Place the front plate over the assembly and secure it with the screws provided (Fig.2). Do not over tighten the screws, to do so may damage the front plate, fixing screws or grid frame.  	<p>Product dimensions:</p>  <p>QUINETIC</p> <p><small>*For more information about pairing, instructions and troubleshoot please visit www.tlc-direct.co.uk website.</small></p>	
--	--	--	--