

LEDLITE™ User Instructions

LTMFHT - Multi Function Head Torch



350 lumens



COB & XPE



Wave induction



Running Time: 2.5h



Charging Time: 2.5H



IP44 Rated


Please read these instructions and retain them for future reference.

Important information


- Use the supplied USB charging cable when connecting the worklight to the power supply.
- Charge the battery before using.

Specifications:

- LED: COB LED + 3535 for spot LED
- Lumens (full): 350lm + 150lm
- LED Power: 5W For COB LED
3W for spot LED
- Colour Temperature: 6000-6500K
- COB LED Modes: 100%-40%-Strobe
- Battery: Li-ion, 3.7V, 1200mAh
- Charge Voltage: 5V, 1A
- Charge type: USB-Type C
(cable included)
- Charge Time: 2.5hrs
- Working Time: 2.5hrs (100% brightness)
8hrs (40% brightness)
- COB LED Light Angle: up to 270°
- Light Distance: 240m (100% brightness)
- Storage Temperature: -10 to +45°C
- Main Material: Silica Gel
- IP Rating: IP44
- Dimension: 300*32*26mm

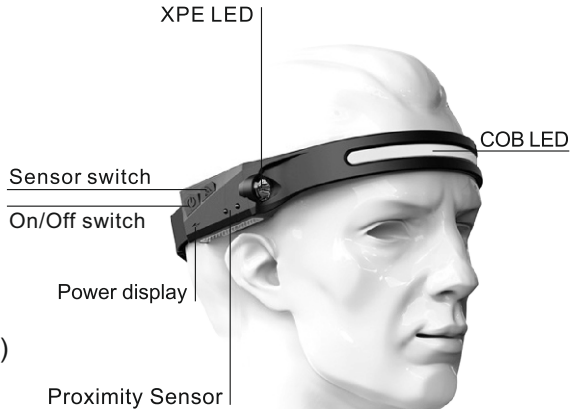

Dimensions:

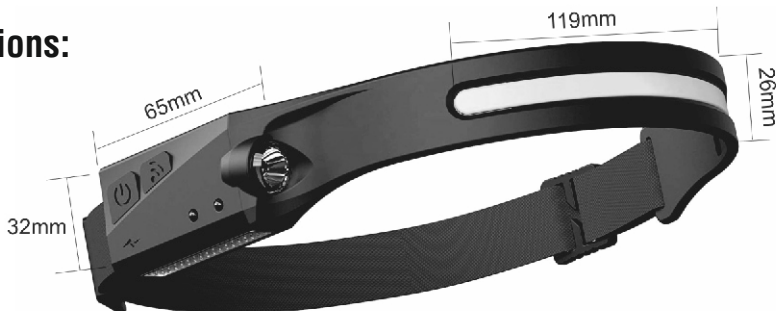

Mode	Brightness	Battery time
COB 100%	350LM	2.5 hours
COB 40%	150LM	5 hours
COB Flash Light	—	8 hours
XPE 100%	150LM	4 hours
XPE 40%	60LM	8 hours

Operation:

- The LED head torch is switched on/off using the power on/off switch.
- Press the power on/off switch to change the modes of the COB LED lighting and spot lighting.
- With the power on, press the sensor switch to change the mode (wave induction type, wave your hand in front of the sensor).
- Long press the on/off switch at any mode to change the strobe mode.

Charging:

Follow the steps below when charging the LED head torch:

1. Ensure the head torch is off when charging.
2. Connect the charging lead to a 5V 1A supply & the port on the torch.
3. Charging to full may take up to 2.5 hours. Once fully charged disconnect from the power supply..

Safety:

- The LED lights are very bright and can cause serious injury to the eyes.
- Do not stare directly into the LED beam.
- Do not shine the light directly into someone's eyes.
- Do not allow children to play with this product.
- Use only the input voltage specified.
- Do not leave on a flammable surface when charging.
- This head torch is rated at IP44 (splashproof), do not immerse in water.
- Do not expose the battery to flames or excessive heat.

Cleaning and Disposal:

Do not use any cleaning chemicals, wipe with a soft damp cloth when necessary. This product should be disposed of in accordance with local regulations.



LEDLITE™

For further information visit www.tlc-direct.co.uk