


The Fastest Fire Cable to Install

Ventcroft NoBurn Platinum is available in a variety of multiple core combinations all with CPC (circuit protection conductor).

500m reels and other special lengths are available.

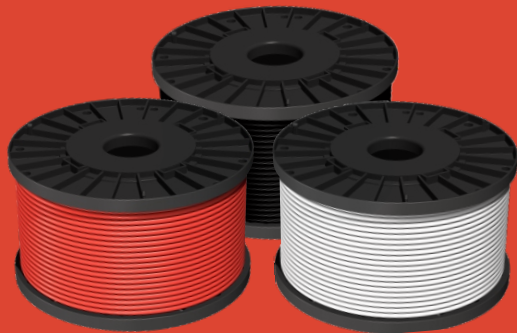

Supplied On Robust Plastic Reels

- Installer safe and easy handling •
- Better Reeling and damage resistant •
- Weather and moisture resistant •

Manufacturers Recommended Installation Guide Lines

Recommended metal clip spacing 300mm Horizontal
400mm Vertical

Minimum recommended installation temp. 0°C

Installation methods for current rating in accordance with BS7671/IEE Wiring Regulations

The tabulated ratings are based upon 30°C ambient temperature and 70°C operating temperature

Minimum Bend Radius = 6 x Diameter


Specifications

LPCB approved to	Fire System Standard Fire Resistance Standard Fire Resistance Standard Fire Resistance Standard Fire Resistance Standard Halogen Emission Standard Low Smoke Standard	BS5839-1:2002 Clause 26.2d BS8434-1: 2003 30 mins. BS EN50200:2006 PH120 BS7629-1:1997 BS6387:1994 Clause 11 CWZ BS EN50267-2-1:1999 BS EN50268-2:2000
Designed to comply to	Emergency Lighting BS5266-1:2005	
Materials	CPC (Earth) Conductors Core Installation Screening Outer Sheath	Tinned Annealed Copper Plain Annealed Copper Fire Resistant Silicone Aluminium Foil Low Smoke Halogen Free Thermoplastic
Working Voltage	Core to Core Core to CPC	500V 300V
Types	Outer Sheath Colours Number of Cores Inner Cores CSA	Red, White or Black 2, 3 & 4 Core 1.0, 1.5, 2.5 & 4.0mm CSA
Resistance	1.0mm CSA 1.5mm CSA 2.5mm CSA 4.0mm CSA	18.1 Ohms / 1 Km 12.1 Ohms / 1 Km 7.41 Ohms / 1 Km 4.61 Ohms / 1 Km
Minimum Bend Radius	Radius = 6 x Diameter	
Operating Temp.	Quiescent Installation	-20 to +70°C. min 0°C
Voltage Drop (DC or Single Phase AC)	1.0mm CSA 1.5mm CSA 2.5mm CSA 4.0mm CSA	44 Ohms mV / A / m 29 Ohms mV / A / m 18 Ohms mV / A / m 11 Ohms mV / A / m
Approximate Overall Diameter	2 Core	1.0mm / 7.20mm 1.5mm / 7.90mm 2.5mm / 9.50mm 4.0mm / 10.88mm
	3 Core	1.0mm / 7.40mm 1.5mm / 8.50mm 2.5mm / 10.10mm 4.0mm / 12.50mm
	4 Core	1.0mm / 9.00mm 1.5mm / 10.50mm 2.5mm / 13.00mm 4.0mm / 13.63mm
Approximate Weights	2 Core with CPC	1.0mm 8.0 Kg / 100 m 1.5mm 9.5 Kg / 100 m 2.5mm 14.1 Kg / 100 m 4.0mm 20.0 Kg / 100 m
	3 Core with CPC	1.0mm 9.5 Kg / 100 m 1.5mm 12.9 Kg / 100 m 2.5mm 19.1 Kg / 100 m 4.0mm 25.0 Kg / 100 m
	4 Core with CPC	1.0mm 10.9 Kg / 100 m 1.5mm 14.5 Kg / 100 m 2.5mm 22.2 Kg / 100 m 4.0mm 31.0 Kg / 100 m
Current Rating	Cable Clipped (DC or Single Phase AC)	1.0mm 15A 1.5mm 19.5A 2.5mm 27A 4.0mm 36A
	Enclosed (DC or Single Phase AC)	1.0mm 13A 1.5mm 16.5A 2.5mm 23A 4.0mm 30A
Warranty	Period Identification	10 Years from Date of Manufacture Date of Manufacture Marked On Cable

Fully Tested and Approved by



Certificate No. 682a

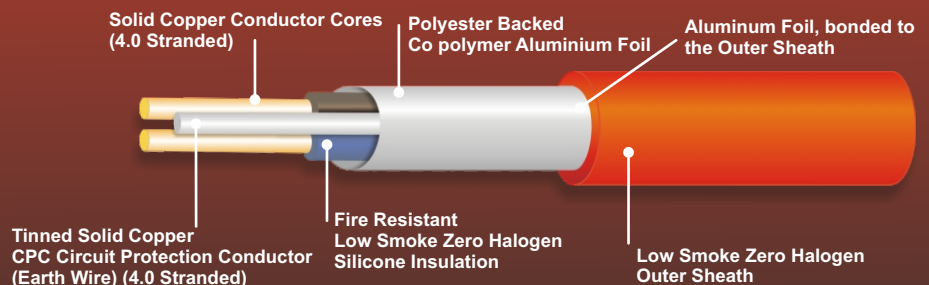

Ventcroft Ltd. Goddard Road, Astmoor Industrial Estate, Runcorn,
Cheshire WA7 1NQ, Great Britain. Tel: +44 (0)1928 581098, Fax: +44 (0)1928 581099

www.ventcroft.co.uk

