



INSTALLATION & MAINTENANCE MANUAL

BATCA4 / BATCA5 / BATCA5H
BATCA6 / BATCA6H

GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

These instructions should be used to aid installation of the following products:

BATCA4 / BATCA5 / BATCA5H / BATCA6 / BATCA6H

SAFETY


- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse, or circuit breaker
- Please note the IP (Ingress Protection) rating of this luminaire when deciding the location for installation
- This product is for indoor only
- This product is Class I and must be earthed
- This series is IP20 rated

INSTALLATION

Note - If this luminaire is being used in conjunction with an external PIR or sensor, please confirm with the manufacturer of the sensors that they are compatible with LED luminaires.

- Provide power to the required point of installation (refer to BS7671 for correct cabling methods)
- Press the two clips at either end of the luminaire to gain access (see Fig.1)

- Mark the location of the fixing holes and drill the holes ensuring not to infringe any joists, gas / water pipes or electrical cables. For distance between fixing centres, please see the table below:

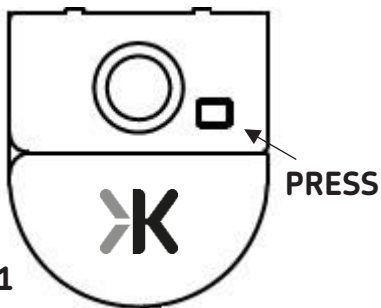

PART CODE	DISTANCE (mm)
BATCA4EM	965
BATCA5 / BATCA5H	1265
BATCA6 / BATCA6H	1529

Fig. 1

- Ensuring correct polarity is observed, carefully wire as shown in Fig. 2



Fig. 2

- Choose the required colour temperature by means of the three-position switch (see Fig. 3)

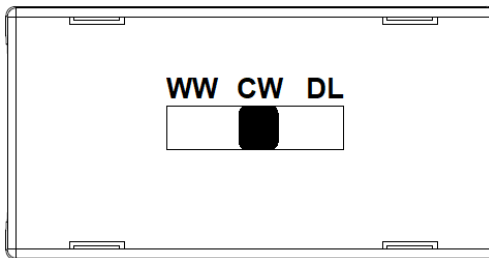


Fig. 3

- Switch on and check for correct operation


WARNING

This luminaire must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

GENERAL

This product contains a light source of energy efficiency class E for BATCA4EM and class D for BATCA5EM / BATCA5EMH / BATCA6EM / BATCA6EMH to Regulation (EU) No. 2019/2015.

This product contains a light source of energy efficiency class D to Regulation (EU) No. 2019/2015.

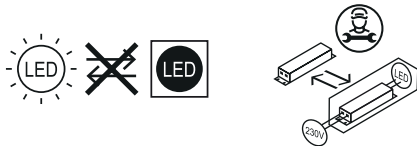

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

This product is non-dimmable.

This product should be dismantled for disposal when it reaches the end of its life. Please see website for dismantling instructions.

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

WARRANTY

This product has a warranty of 5 years (excluding battery) from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch codes will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

INTERNATIONAL
CONTACT DETAILS



230V
50Hz



IP20



-20~
45°C
TA

ML
ACCESSORIES LTD



UK
CA CE



134

ML Accessories Limited LU5 4LT
www.mlaccessories.co.uk