

INF-REMCON

The INF-REMCON is a wireless keypad designed for use with the infinite alarm system. This keypad includes three arming keys that activate Full, Part or Perimeter arming modes. Pressing the Full and Perimeter buttons simultaneously generates an SOS panic alarm. Additionally, two Home Automation keys allow remote control over Home Automation modules.

Registration

To register the INF-REMCON:

1. Set the control panel to Registration mode.
2. Press a button on the keypad making sure that the LED lights up when the button is pressed.
3. Wait for five seconds and press the same button again.

Note: Alternatively, the INF-REMCON can be registered to the receiver by manually entering the transmitter's serial number.

Battery Replacement

Every time a key is pressed, the battery status LED is lit. When the battery needs to be replaced, the LED flashes.

To replace the battery:

1. Remove the battery cover located at the rear of the unit. To do so, press the release tab using a small screwdriver and lift the cover away from the INF-REMCON's plastic housing.
2. Observing correct polarity, replace the 9V alkaline battery.
3. Replace the battery cover making sure that it clicks shut.

Wall Mounting

To mount the INF-REMCON to the wall:

1. Place the mounting bracket in position against the wall and mark the two mounting holes.
2. Install wall anchors in the appropriate positions and mount the bracket to the wall.
3. Place the INF-REMCON in the bracket and slide it down until you hear a click.
4. To release the INF-REMCON, press the release tab in the direction of the wall and remove the unit.

Technical Specifications

Antenna: Built-in Whip
Frequency: 868.35, 433.92 or 418MHz FM
Current Consumption: 25mA (transmission)
3 μ A (standby)

Power: 9V Alkaline Battery
RFI Immunity: 40V/m
Operating Temperature: 0 - 50°C
Dimensions: 128 x 49 x 27mm

IF YOU REQUIRE FURTHER ASSISTANCE
PLEASE CALL OUR HELPLINE 0121 786 1881,
SEND A FAX 0121 789 8055
OR AN EMAIL VIA OUR WEBSITE www.espuke.com



ESP - Electronics Line UK
Unit 7, Leviss Trading Estate, Station Road,
Stechford, Birmingham B33 9AE.
Tel: (44-121) 789-8111, Fax: (44-121) 789-8055



Electronics Line

All data is subject to change without prior notice. In no event shall Electronics Line (E.L.) be liable for an amount in excess of E.L.'s original selling price of this product, for any loss or damage whether direct, indirect, incidental, consequential or otherwise arising out of any failure of the product. Hereby, Electronics Line declares that this transmitter is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. 868.35MHz frequency transmitters are not intended for use in Bulgaria, Greece, Poland and Slovenia.



Z10284A (6/03)

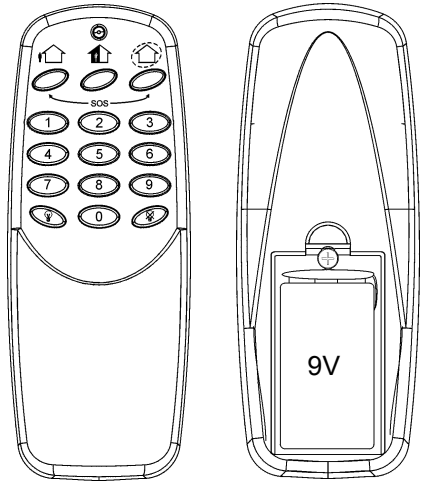


Figure 1: INF-REMCON
(front and rear view with battery
cover removed)

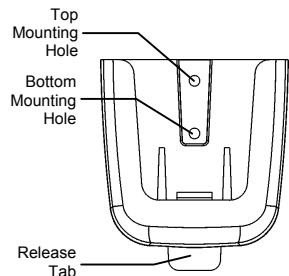


Figure 2: INF-REMCON
Mounting Bracket