

### QuietAir 2

# QuietAir

## **WhisperQUIET**

## **Ultra** LOW ENERGY


## **Eco**START TECHNOLOGY

A range of elegant, discreet axial fans that are supremely quiet and activate only when they are really needed, using exceptionally low energy

- Extremely quiet, 25 dB(A)\*
- Delay start for two minutes avoids unnecessary use (especially at night), and saves energy
- Power consumption only 5 watts \*
- Longlife ball-bearing motor with 40,000 hours life
- Two speed options, 75m<sup>3</sup>/hr\* and 90m<sup>3</sup>/hr
- High efficiency impeller for ducted installation
- Basic switching, timer, humidity and motion sensor versions



AIRFLOW .

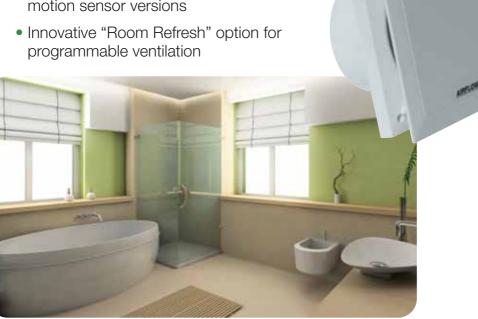



### Quietair combines contemporary design with ultra low noise levels and outstanding energy efficiency.

QuietAir 2


Quietair sets new standards for the reliable, low cost ventilation of toilets, en-suites and bathrooms; and at just 25dB(A) you will hardly hear the fan running, even at night!

#### Low Energy, High Tech!

- High efficiency impeller delivers up to 60m<sup>3</sup>/hr through 12m of rigid ducting, including 90° bends
- Integral flow straightener and back draught flap
- Low specific fan power for SAP assessments
- Clip-on cover for ease of cleaning
- Innovative room refresh option (interval timer) programmable for automatic long term routine ventilation
- Complies with latest Building Regulations Approved Document F







**PERFORMANCE** 

**SPECIFICATION** 

Specification	QT100B	QT100T	QT100HT	QT100PIRT
Airflow m <sup>3</sup> /hr	75/90	75/90	75	75/90
L/sec	20.8/25	20.8/25	20.8	20.8/25
Airflow @ 31Pa m <sup>3</sup> /hr	60	60		60
L/sec	16.6	16.6		16.6
High Efficiency Impeller	Axial	Axial	Axial	Axial
Mounting	Wall/Ceiling	Wall/Ceiling	Wall/Ceiling	Wall/Ceiling
Sound Pressure dB(A) @3m	25/30	25/30	25	25/30
Delay Start (minutes)	No	2	2	2
Adjustable Timer (minutes)	-	6,12,15,21	6,12,15,21	6,12,15,21
Adjustable Humidity (%RH)	-	-	65%-90%	-
Power Watts	5/9	5/9	5/9	5/9
SFP@75m <sup>3</sup> /hr	0.24	0.24	0.24	0.24
Voltage	230/1/50-60Hz	230/1/50-60Hz	230/1/50-60Hz	230/1/50-60Hz
Rating	IP45	IP45	IP45	IP45
Max ambient temperature	40	40	40	40
Interval timer, auto start (hours	3) -	4,8,12,24	-	-

ADF 162/0709

Call: 01494 560 800 Visit: www.airflow.com





