Loovent eco The Powerful Performer

Versatile and Reliable More than 1,500,000 sold!

Share in Airflow's 61 years of ventilation expertise in creating fresh and healthy indoor environments.

Meet the 4th generation of the Million Plus selling Loovent extractor fan. With a pedigree of proven reliability and outstanding performance it really is a fan for all applications.

Airflow up to 31 l/s

Eco from 2.8 W

Quiet from 25 dB(A)

Why Choose Loovent eco?

Experience makes the difference

- Two speed with air flows of 17 I/s and 31 I/s
- The power of a centrifugal fan makes longer lengths of ducting no problem. Delivers 15 l/s through 6m of duct
- > Very quiet, sound pressure levels as low as 25 dB(A) at normal operation
- > Perfect for **New Build** and **Social Housing** upgrades
- Available in **all the options you need** Intermittent, Continuous dMEV and 12 V SELV. Controls options are - timer, humidity, motion sensor
- Energy efficient DC motor, from just 2.8 W standard
- Versatile mounting surface or recessed, portrait or landscape
- → IPX5 rating for both wall and ceiling install
- Really compact the smallest footprint in its class, only 312cm₂
- ▶ Quick and easy to install, proven over four decades
- **► Easy upgrade** of older Loovent 01C and 01 Fans, same mounting holes and outlet position
- Complies with latest Building Regulations
- **Outstanding 5 year warranty**



Toilet / Bathroom













Suitable for New Build and an easy upgrade from old Loovents

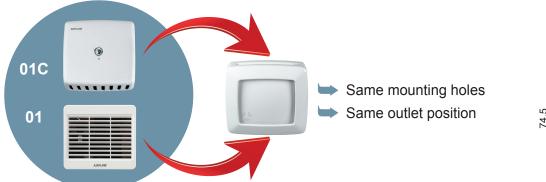



A Product with Pedigree


Practical: Surface or recessed, portrait or landscape mounting


Reliable: At least 40,000 hours constant operation Useful: No noise magnetic anti-backdraught flap

Quick: Fast to fit and interchangeable with older versions

Safe: Anti-strangle pull cord, electrical cut out when cover removed

Eco: Made of 100% recyclable materials





Many options - A Fan for all reasons

Intermittent

Loovent eco T



Loovent eco HT



Loovent eco MST







Loovent eco SELV HT



Continuous dMEV Loovent eco dMEV T



Loovent eco dMEV HT



Continuous SELV dMEV

Loovent eco SELV dMEV T











Specification		eco T	eco HT	eco MST	eco dMEV		
Operation mode		intermittent			continuous		
Controls		timer	humidity timer	motion sensor timer	timer / humidity sensor		
Air flow low/boost [m³/h]		62 / 112			25 / 54	32 / 54	58 / 112
Air flow low/boost [l/s]		17 / 31			7 / 15	9 / 15	16 / 31
Nominal power [W]		3.6 / 12.0			2.8 / 8.9	3.0 / 8.9	2.8 / 12
Nominal current [A]		3.0					
Sound pressure [dB(A)]		29 / 47			25 / 46	25 / 46	28 / 46
Specific Fan Power [W/I/s]		0.21 / 0.40			0.40 / 0.59	0.32 / 0.59	0.17 / 0.40
Building regulation ADF		compliant			compliant and SAP eligible		
Duct diameter [mm]		100					
Fan type		centrifugal					
Ingress protection rating		IPX5					
Supply voltage		100/240 V - 50/60 Hz or 12 V DC (SELV version)					
Dimensions HxWxD [mm]		167 x 187 x 138					
Weight [kg]		1.0					
Part number	240 V	72684305 (T)	72684306 (HT)	72684307 (MST)	72684308 (T)		
					72684311 (HT)		
	12 V	72684309 (SELV T)	72684310 (SELV HT)	N/A	72684312 (SELV T)		
					72684313 (SELV HT)		

Call: 01494 560800

Visit: airflow.com



Airflow Developments Limited Aidelle House, Lancaster Road, Cressex Business Park, High Wycombe, Buckinghamshire, United Kingdom, HP12 3QP

E-mail: info@airflow.com Telephone: +44 (0) 1494 525252

