



Available Finish: Black

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP44 240VAC~50Hz 100W Max.

These fittings are Class I and must be Earthed

**Important Information**

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply.

Any faulty, broken or damaged luminaires should be replaced immediately.

KSR will not accept responsibility for any claims arising from a poor installation.

Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

**Important User Advice**

Always switch off mains supply before servicing, fitting or replacing lamps.

KSR recommends a maintenance schedule of washing down with soapy water (no abrasive cleaners) and greasing all nut/bolts every 3 months.


At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

**Installation Procedure**

Familiarize yourself with the luminaire/installation procedure and ensure the power is safely isolated before installing the luminaire.

**Street Post Lantern**

- a) Isolate mains supply.
- b) Fix bottom half of the middle post to base using the 3 screws provided.
- c) Screw on the top half of the middle post and lock with grub screw.
- d) Run cable from the head down the middle post to the base.
- e) Screw head onto post and lock with grub screw.
- f) Insert glass panels into head using fixing plates and screws.
- g) Install suitable E27 lamp.
- h) Fix top on to post head.
- i) Terminate the cable from the head in to terminal block in the base: Brown (L), Blue (N) and Green/Yellow (Earth). As below.
- j) Connect the mains supply leads with terminal block: Brown (L), Blue (N) and Green/Yellow (Earth).
- k) Fix base to suitable substrate using suitable fixings (not supplied).
- l) Switch on mains supply and test.

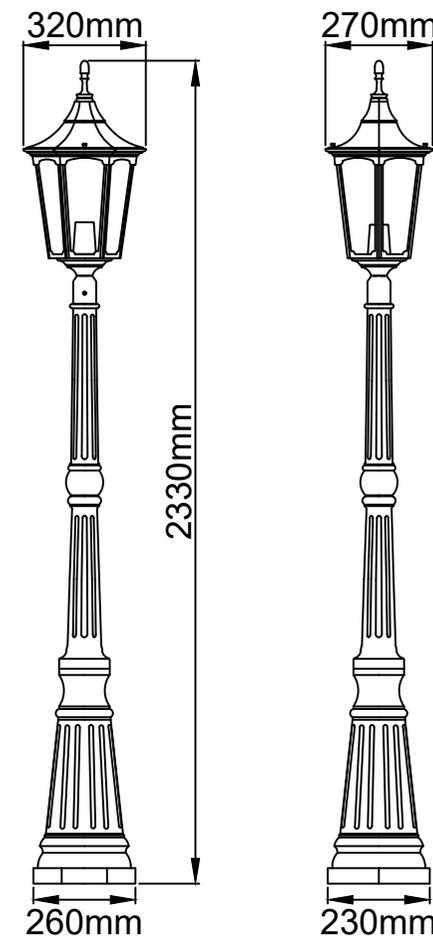

KSR9965

**Lamp Details**

Lamp Cap: E27  
Max Wattage: 100W max.



Suitable for Retrofit LED Lamps

