

# Maxivent eco

Larger bathroom, utility room  
and kitchen



## KEY FEATURES

- Axial fan
- High performance fan up to 260 m<sup>3</sup>/h
- Easy to fit and clean
- Can be mounted in the wall or ceiling
- Interchangeable fixing holes to easily replace most other 150 mm fans
- Variable speed controller available
- Thermally protected motor
- Low Watt motor 28 W
- Low SFP - 0.38 W/l/s
- Silent automatic shutter
- IP45 rating
- Complies with Building Regulations
- 3 year warranty



Highly reliable and powerful axial fan in a modular design for ease of installation and maintenance. Maxivent is designed to provide extraction levels that comply with the latest building regulations.

Maxivent fans offer quiet powerful performance in units equipped with auto shutters. These stylish, modern 150 mm axial fans will blend comfortably with existing décor and are quick and easy to install. They are the ideal solution for removing damp moist air, odours and airborne pollutants from kitchens and utility rooms.

Available with a range of control options; pull cord models enable local activation of the fan via the use of an integral pull cord; timer models include an adjustable timer overrun between 1 and 30 minutes when activated and deactivated using an external switch; humidity models activate the fan when the humidity level reach the adjustable targets between 40 and 95% RH.

## MODELS

<b>Pull Cord</b>	Activated by pull cord
<b>Timer</b>	Adjustable timer overrun between 1 and 30 minutes
<b>Humidity Pull Cord</b>	Adjustable Humidity 40 to 95% RH with adjustable timer and pull cord




## TECHNICAL DATA

Specification	Maxivent eco P	Maxivent eco T	Maxivent eco H
Air flow m³/h l/s	260 72		158 / 260 44 / 72
Fan type	Axial		
Controls	Pull Cord	Timer	Humidity / Pull Cord
Mounting	Wall / Ceiling		
Sound pressure dB(A)@3 m	57		46 / 57
Power Watts	28		
Amps	2		
SFP@72 l/s	0.38		
Building Regulations ADF	YES		
Duct diameter (mm)	150		
Voltage	230 V / 1 ph / 50-60 Hz		
Rating	IP45		
Material finish	Plastic		
Weight (kg)	2.45		
Dimensions (H x W x D) mm	225 x 225 x 105		
Part No.	72678201	72678301	72678401
Variable speed controller	9041033*		
EAN	5019009306513	5019009306520	5019009306537


\* refer to accessories section.

## DIMENSIONS

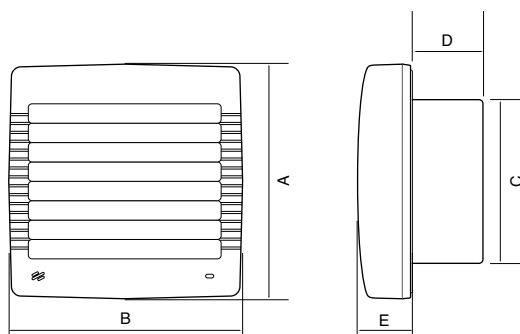



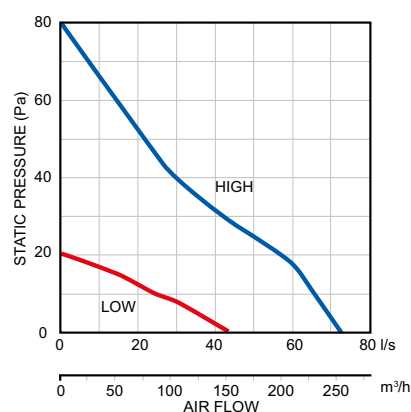

Model	A	B	C	D	E
Maxivent eco	225	225	150	60	45

## PERFORMANCE



## CONTROLS & ACCESSORIES

 <p><b>Speed Controller</b> No: 9041033*</p> <p>Electronic fan speed controller (variable) for domestic purpose</p>	 <p><b>Cavity Wall Kit - White</b> No: 90001020</p> <p>150Ø x 350 mm rigid duct. Included is a square white grille with internal fly screen, and mounting screws.</p>	 <p><b>Cavity Wall Kit - Terracotta</b> No: 90001017</p> <p>150Ø x 350 mm rigid duct. Included is a square terracotta grille with internal fly screen, and mounting screws.</p>	 <p><b>Cavity Wall Kit</b> No: 72643203</p> <p>150Ø x 350 mm rigid duct. With an attractive terracotta grille and screws.</p>
--	--	--	--

Others products available from [airflow.com](http://airflow.com)

Call: 01494 525252

Visit: [airflow.com](http://airflow.com)




**Airflow Developments Limited**  
Aidelle House, Lancaster Road,  
Cressex Business Park,  
High Wycombe, Buckinghamshire,  
United Kingdom, HP12 3QP

E-mail: [info@airflow.com](mailto:info@airflow.com)  
Telephone: +44 (0) 1494 525252

[airflow.com](http://airflow.com)

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request



80001319 Issue 2 04/25