

## KIT16B KIT16W


### GENERAL INSTRUCTIONS:

These instructions should be read carefully and retained after installation for further reference and maintenance.


### SAFETY

- Before installation/maintenance ensure that the mains supply to the driver is switched off and the circuit fuses or circuit breakers are removed or switched off.
- Check that the total load on the circuit, including when this driver complete with luminaires is fitted, does not exceed the rating of the circuit cable, fuse or circuit breaker
- Installation of this driver complete with luminaires should only be carried out by, or under supervision of, a qualified electrician to the current IEE Wiring and Building Regulations.
- Please recycle this kit.
- This product is not suitable as a "drive-over" fixture. Do not install where vehicles may drive over this product.
- This product is suitable for wall, ceiling or floor mounting - internal or external use.
- This product is IP65 rated and suitable for external applications where applicable.
- This product is class II rated and should not be earthed
- 25mm cut-out
- This product is non-dimmable
- Driver supplied

### INSTALLATION




1. Mark the position(s) of where the fittings are to be installed ensuring not to infringe with any joists, gas / water pipes or electrical cables that may be hidden below the surface. Using a suitable hole-saw cut a hole approximately 25mm in diameter and 30mm deep




2. Feed the pre-installed cables through the holes and connect as shown with the pre-installed plugs and sockets

Push the fittings into the pre-drilled holes ensuring a secure fit.



3. Connect the driver to the 230V supply using a suitable terminal block ensuring correct polarity is observed. BLUE-NEUTRAL. BROWN-LIVE.

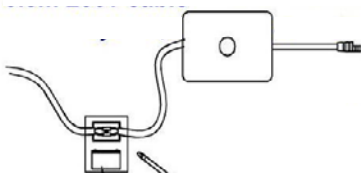

4. Connect the driver using the pre-installed socket onto the LED string

5. Test for correct operation

### REPLACING LAMPS

- The LED lamps fitted in this product are non-replaceable

### CLEANING

- Clean with a soft dry cloth only, do not use other materials or solutions which may damage the fitting