

LTBR18B - Mini LED Round Bulkhead IP65 9/12/18W CCT - Black



Please read these instructions and retain them for future reference.

Important information:


It is recommended that this fitting is installed by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control.


- This product is designed for connection to a 220-240V mains supply.
- Only mount on level and stable surfaces.
- Ensure sufficient ventilation of the product.
- This product is not suitable for dimming.
- We cannot accept responsibility for any claims arising from a poor installation.
- Always switch off mains supply before installation.
- The light fitting is Class II and does not require an earth connection.

TECHNICAL SPECIFICATIONS:

- Input Voltage: 220-240V/AC
- Multi Power: 9W / 12W / 18W
- CCT Changeable (switch): 3000K/4000K/6500K
- Efficacy: >120lm/W
- Light Output: 1100lm/1500lm/2100lm
- CRI > 80
- Beam Angle: 115°
- IP Rating: IP65
- Protection Class: Class II
- Housing: PC Base & Diffuser
- Operating Temp.: -15°C to +40°C
- IK Rating: IK08
- Warranty: 5 years

CCT & Power Changeable:

 Switch off the mains supply before changing power or CCT

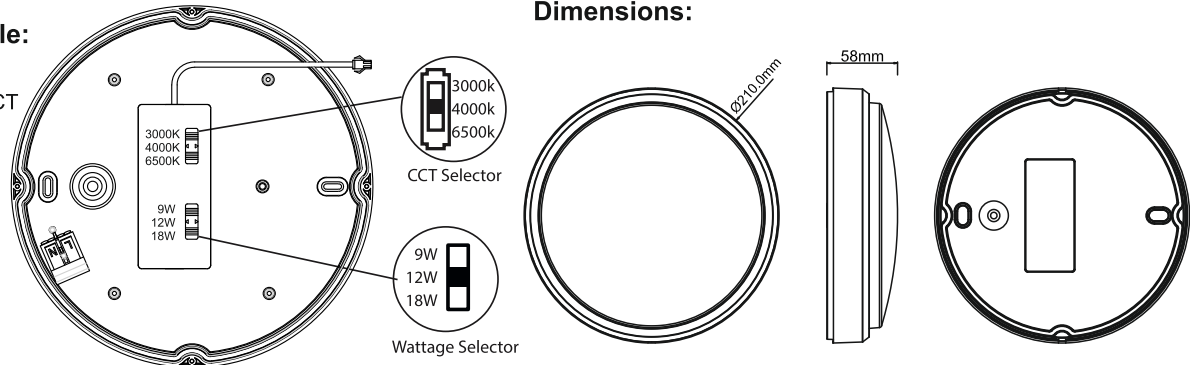

Installation Instructions:

1. Switch OFF the mains supply. Remove the trim of the fitting.
2. Using a screwdriver remove the cover of the fitting.
3. Identify the location and direction of any hidden supply cables or service pipes before drilling fixing holes. Use the two designated points from the fixture as spacing between the holes. Ensure the fitting is level and the wall is capable of holding the weight of the product.
4. Connect the luminaire to the mains supply using the piano terminal block inside the luminaire.
5. Fix the luminaire into the suitable position. Use the round rubber rings around the screws from inside of the luminaire to make it waterproof.
6. Clip the trim back onto the fitting and turn on mains supply ON to test it.

