

LEDLITE™ ⓘ Installation Sheet

LTSHL8 - 8W CCT LED DUAL VOLTAGE SHAVER LIGHT



LTSHL8W

LTSHL8B

LTSHL8C

These instructions should be read carefully and retained after installation for further reference and maintenance.


SAFETY

- Before installation, ensure that the mains supply to the luminaire is switched off and the circuit supply fuses are removed or circuit breaker turned off.
- It is recommended that a qualified electrician is consulted or used for the installation of this luminaire and installed to the current edition of the IEE wiring regulations.
- Check that the total load on the circuit, including this luminaire, does not exceed the rating of the circuit cable, fuse or circuit breaker.
- Do not install this product on newly plastered or damp surfaces.
- Ensure all electrical connections are secure & that there are no loose strands.
- Clean the fitting with soft damp cloth. Do not use any chemical or abrasive cleaners.

PRODUCT SPECIFICATION:


- Voltage: AC220-240 V/AC 50/60HZ
- Dual voltage output: 115V/AC & 230V/AC
- IP Rating: IP20
- Wattage: 8W
- 3CCT: 3000K / 4000K / 6000K
- Lumens: 480lm
- Efficacy: 65lm/W
- Beam angle: 130°
- Product classification: Class I
- Switch type: Pull cord
- Certification: CE, UKCA, ROHS Certification
- Warranty: 3 years

DIMENSIONS(mm):

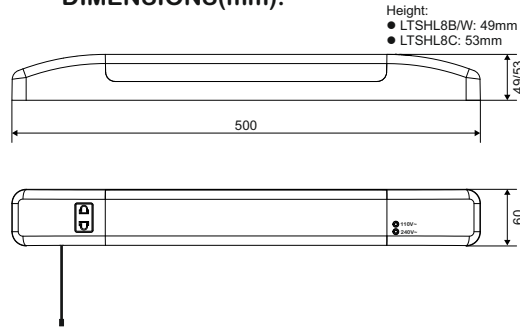


WIRING DIAGRAM:

Luminaire:




Mains:




INSTALLATION INSTRUCTIONS:

⚠ Switch off the mains supply before installation. Read the instructions and check you have all the tools and accessories to complete the installation correctly. Choose the desired position before drilling any fixing hole, check that there are no obstructions hidden beneath the mounting surface such as pipes or cables.


1. Turn off the mains power supply.




2. Remove back panel fixing screws and remove the panel from the fitting.




3. Place the shaver light in your desired position. Mark the holes fixing center.




4. Drill the fixing holes.




5. Insert the wall plugs supplied.

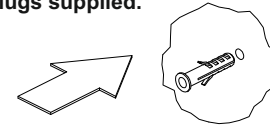


6. Insert the mains cable through the hole in the back panel.




7. Insert the mains cable into the 3-way terminal block in the housing, ensuring correct wiring.




8. Fix the back panel on the wall and secure it using the screws removed in step 2.

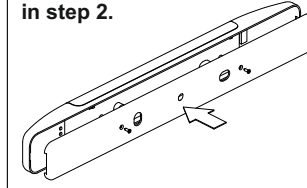


9. Remove the diffuser.

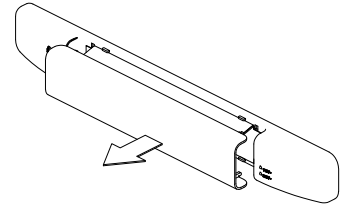


10. Secure the shaverlight to the wall using the with the supplied fixings.




11. Select the desired CCT temperature.



12. Attach the diffuser.

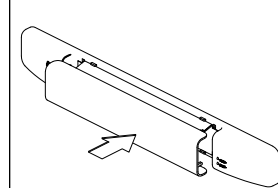



13. Turn ON the mains.



Installation Zones:

All installations must comply with safety distance guidelines based on installation zones. In rooms with showers and baths the LTSHL8 shaver lights has to be installed outside of **Zone 2** at all times.

Please check Fig. 1 and Fig. 2 below illustrating the installing zones. These regulations apply to domestic installations only.

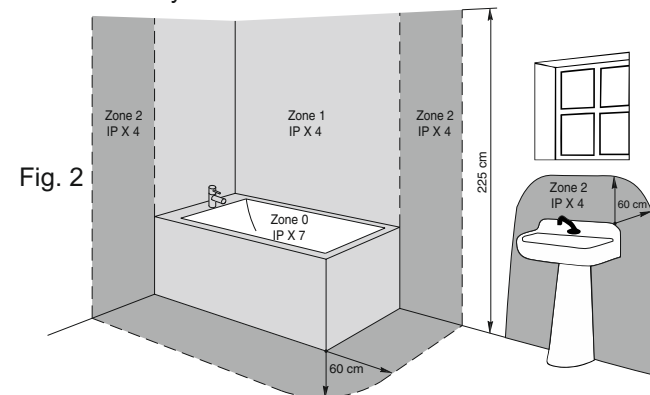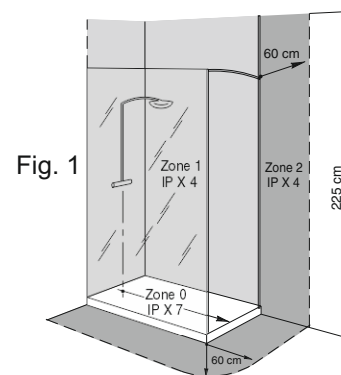

Care Instructions:

We recommend regular cleaning of accessories with a mild, soapy solution and wipe with a dry cloth. Avoid use of abrasive and corrosive chemicals.