

LEDLITE™

Energy Saving LED

LTFLPWIFI - Smart Wi-Fi CCT LED PIR Floodlight

NEW WiFi Smart LED PIR floodlights, compatible with Alexa and Google Home, CCT colour changeable, controlled by smart devices. Both the Floodlight and the PIR can be controlled through the Smart Life APP.

Group, Timer, DIY Scenes, Voice control and Schedule functions available.
The PIR sensor can be linked with other smart WiFi devices through Automation, creating the possibility for multiple control situations.
Applications: outdoor lighting, lift, lobby, common staircases, for basement or covered parking area, garden lights.



- Smart Control
- Security Sensor with Event Records
- CCT Changeable
- Built-in Junction Box



2.4Ghz Wi-Fi

tuya.com

Smart life, smart living



Works with Amazon Alexa
and Google Assistant



Works with the
Google Assistant



amazon alexa



APP Smart Control

CCT

2700K-6500K



Light On/Off



Timer Control



No Hub Required





App Dimmable



Voice Control

1800lm


Lumen Output

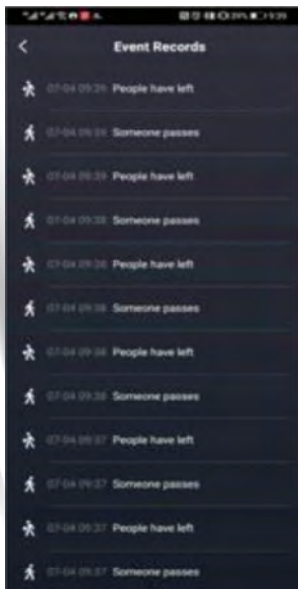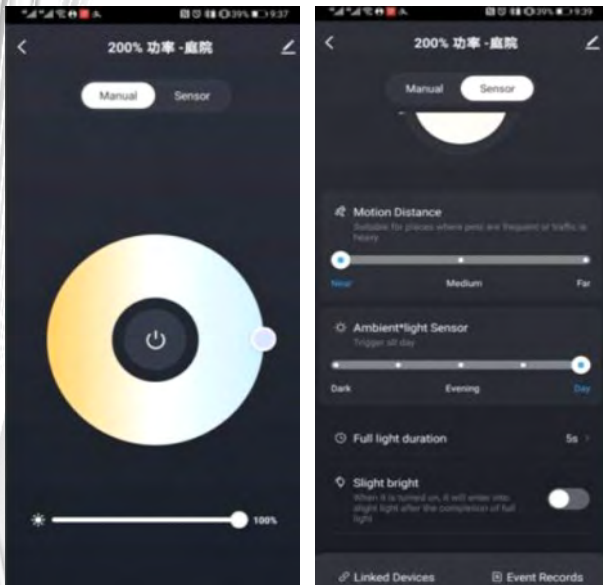

Specifications:

- App Control: **2.4Ghz WiFi** using Smart Life APP
- Compatible with **Amazon Alexa & Google Home**
- **APP Light Control:** CCT, Dimming, ON/OFF
- **APP PIR Control:**
 - Detection Distance (up to 8m)
 - Lux Level (Ambient Light)
 - Light Duration
 - Stand-by Light
 - Stand-by Light Duration
 - Event Records
 - Link to other Smart devices through Automation
- Voltage: 220-240V
- Frequency: 50/60Hz
- Current: 150mA
- Driver Type: IC Driver
- Power: 10W (3000K and 6500K) up to 20W (4000K)
- LED Chip: 2835 SMD
- Lumen Output: 900-1000lm (3000K/6500K)
1800lm (4000K)
- Colour Changeable: 3000-6500K
- CRI: >70
- Power factor: >0.9
- Beam Angle: 110°
- Dimmable: Yes, through the APP (10-100%)
- Lifetime: 25000hours
- Operating Temp.: -20°C~ +40°C
- IP Rating: IP65 Floodlight / IP44 Sensor
- Heatsink Material: Aluminium
- Built-in Junction Box
- Dimensions: 128x169x59mm
- Weight: 290g

Dimensions(mm):

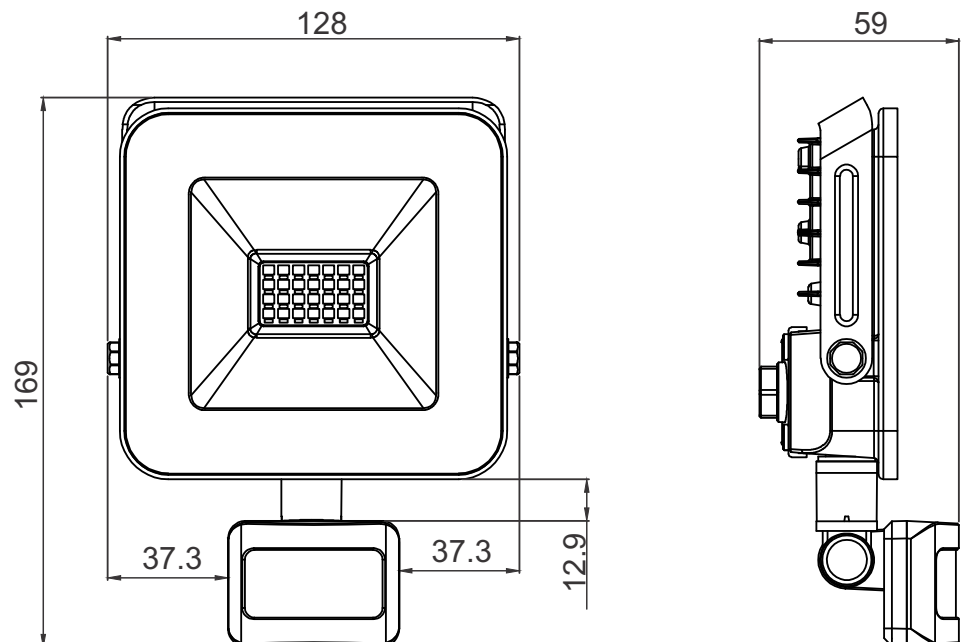

Sharing the joy of technology



Intelligent Grouping

Device Sharing

Voice Control

**"I'm back"**Home mode: Turn on all the lights
after the door lock**"Good night"**Goodnight mode:
Turn off all the lights

App Connect

Smart
Home KitsSupport
Smart Speakers**Control from anywhere**
with the free "SMART LIFE" Connect app