

# OUH2 Industrial Fan Heaters

- An effective means of heating industrial premises
- Extremely robust UK manufactured heaters
- Exceptional reliability – backed by a 5 year warranty



**OUH2 Unit Heater**  
Robust, Rugged, Reliable

## Typical applications

- Warehouses
- Workshops
- Factories

## Features

- FIVE YEAR WARRANTY
- Heavy gauge steel construction
- Bracket provided with every heater for wall or ceiling mounting
- Suitable for vertical suspension – hooks provided as standard
- Built-in temperature control thermostat
- Optional control switch providing on/off/fan only settings
- A number of heaters can be controlled from a single point
- Over-temperature protection device and heat purge device to clear residual heat



Heater Range	
Model	kW
OUH2-03	3.0
OUH2-05	5.0
OUH2-07	7.5
OUH2-10	10
OUH2-15	15
OUH2-20	20
OUH2-25	25

Built to last –an OUH industrial fan heater is covered by a 5-year warranty

Physical Data				
kW	Dimensions (mm)			Weight (kg)
	W	D	H	
3 to 10	435	405	320	18
15 to 25	565	485	445	37



25kW OUH heaters providing frost protection in a supercar workshop




OUH2 Unit Heater suspended using hooks provided

Where roof height exceeds 4m we recommend using our DSU Destratification units – see page 43

Performance Data				
Model	kW	Volts	Airflow (m <sup>3</sup> /h)	dB* @ 2m
OUH2-03	3.0	230V or 400/3N	1100	60
OUH2-05	5.0	230V or 400/3N	1100	60
OUH2-07	7.5	230V or 400/3N	1100	60
OUH2-10	10	400V/3N	1100	60
OUH2-15	15	400V/3N	3150	62
OUH2-20	20	400V/3N	3150	62
OUH2-25	25	400V/3N	3150	62

\*Noise levels are factory tested not laboratory tested

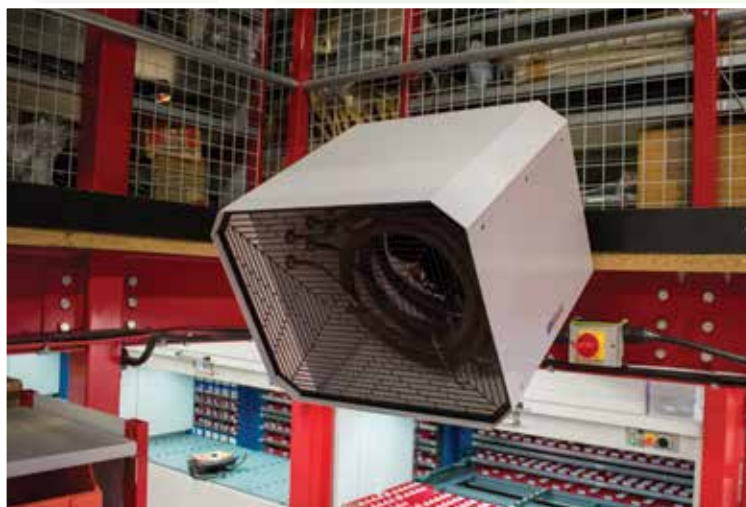

25kW industrial fan heater installed in an automotive parts store

### Control Options


Type	Description	Model	Details
Switch	On/off/fan only	OUH2-S	Page 77
Thermostat	Electronic programmable thermostat with optimum start function	PROSTAT2	Page 71
Thermostat	Electronic programmable thermostat with optional open window detection function	RT16	Page 73
Remote Sensor	Optional remote-mounted temperature sensor for use with RT16 programmable thermostat	CXS	Page 73
Frost Thermostat	Mechanical thermostat -15°C to +10°C (Overrides other thermostats and OUH2-S switch)	FST2-IN	Page 72

No neutral, 440V and 480V versions available - contact BN Thermic

Continued...


# OUH2 Industrial Fan Heaters Continued

## Mounting Options

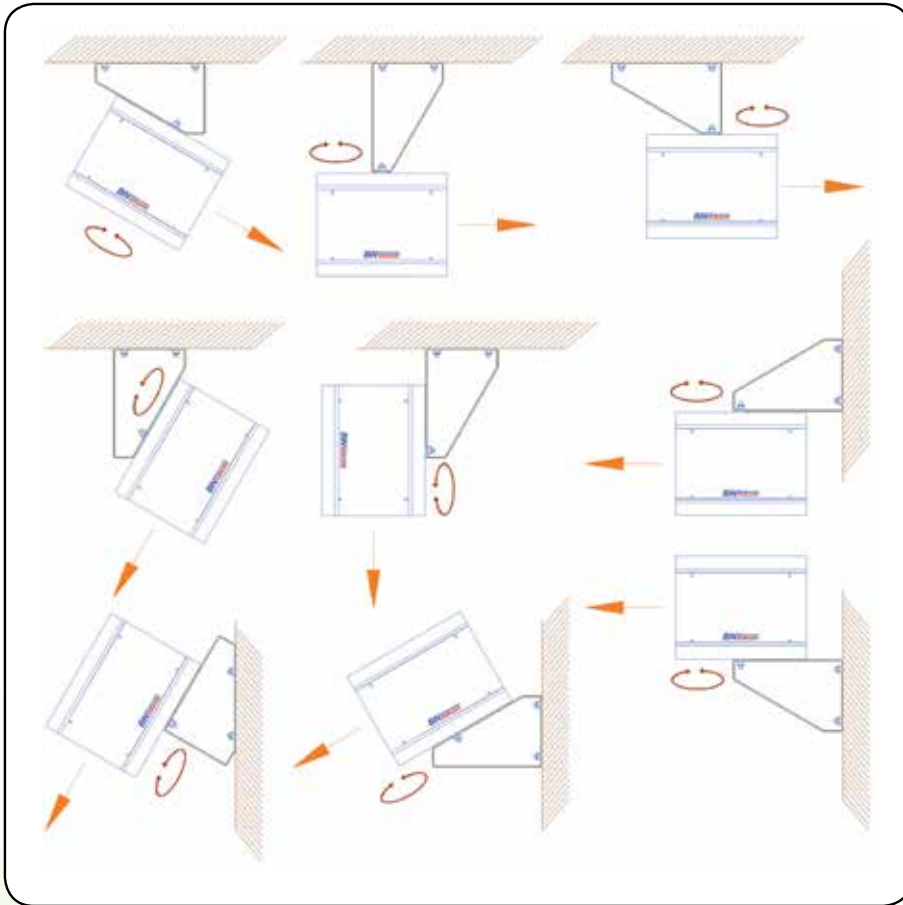

OUH2-S control switch fitted to a heater. Can be wall mounted if preferred

## A Typical Control Group

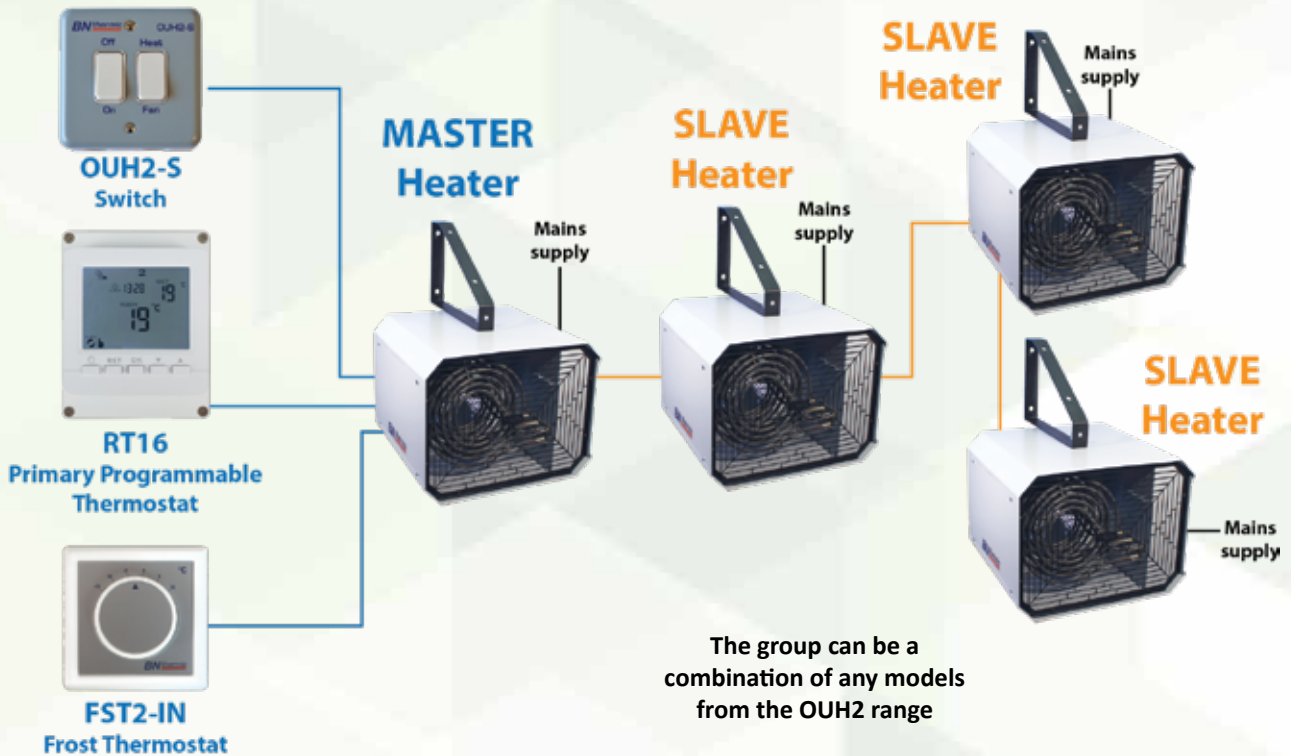

The group can be a combination of any models from the OUH2 range

**FOR MULTI-HEATER SYSTEMS WE RECOMMEND OUR SYSTEM X - See PAGE 26**