


RP2 Radiant Ceiling Panels

- A sophisticated means of heating commercial premises
- Very safe as personnel have no access to heaters
- Optional bracket available for easy mounting onto a conventional ceiling
- IP55 rated models available

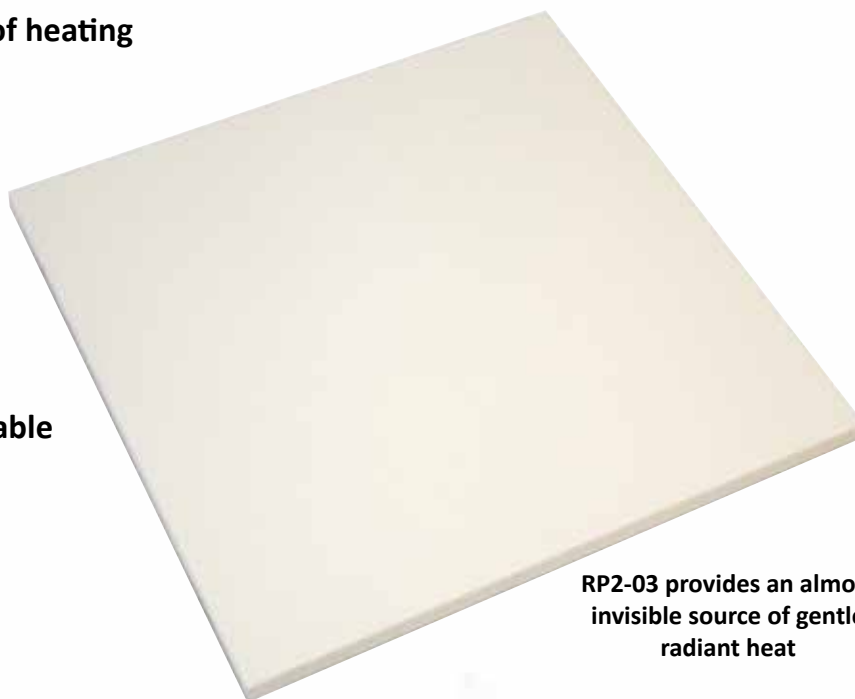

RP2-03 provides an almost invisible source of gentle radiant heat

Typical Applications

- Offices
- Trade counters
- Care homes
- Meeting rooms

Features

- Radiant heat without light output
- Specifically designed for quick and easy installation into a suspended ceiling grid
- Optional bracket available for easy mounting onto a conventional ceiling
- IP55 rated models available
- Attractive white easy-clean finish
- Mounting height up to 4m

Energy Saving

RP Ceiling Panels are a more economic means of heating commercial premises than conventional heating systems.

- The gentle radiant effect means that the 'experienced temperature' can be up to 4°C warmer than the actual air temperature. This means that the thermostat can be set up to 4°C lower.
- The temperature gradient is negligible. Typically air temperature will increase by 0.3°C per metre above floor level. This figure compares to a typical 2.5°C per metre when using fan heaters.

Heater Range

Model	kW	IP55
RP2-03	0.3	No
RP2-06	0.6	No
RP2-03IP	0.3	Yes
RP2-06IP	0.6	Yes
RPB	Optional ceiling bracket for all models	

Technical Specification

Model	kW	Volts	Dimensions(mm)			Weight (kg)
			H	W	D	
RP2-03	0.3	230	25	595	595	5
RP2-06	0.6	230	25	595	595	10
RP2-03IP	0.3	230	25	595	595	6
RP2-06IP	0.6	230	25	595	595	12



RP radiant panels in a changing room making best use of available space



RP radiant panels ceiling mounted in a cricket pavilion in Essex



RPs providing unobtrusive heating in a prestige British sportscar facility



Radiant ceiling panel providing an almost invisible source of heat in a hospital corridor

Control Options

Type	Description	Model
Thermostat	Electronic programmable thermostat with optimum start function 6A	PROSTAT2
Thermostat	Electronic programmable thermostat with optional open window detection function 16A	RT16
Remote Sensor	Optional remote-mounted temperature sensor for use with RT16 programmable thermostat	CXS
Thermostat	Standard room thermostat 20A	RST2-IN
Thermostat	Tamperproof thermostat 20A	RST-TP