


The QUFL235 20/30/50W 3-CCT Selectable Multi-Power Quinetic LED Floodlight is a professional-grade outdoor luminaire incorporating an integrated Quinetic wireless receiver for direct pairing with Quinetic wireless switches and PIR sensors. By combining wireless control with selectable wattage and colour temperature, a single product can be configured on-site to meet the requirements of a wide variety of lighting installations. The luminaire features user-selectable 20W, 30W or 50W power settings, 3000K, 4000K or 6000K colour temperatures, and delivers up to 5000 lumens with excellent colour rendering. Manufactured from robust die-cast aluminium with a tempered glass diffuser and an IP65 weather-resistant rating, the QUFL235 is engineered for long-term reliability in demanding outdoor environments. A slide-in mounting bracket and additional round mounting bracket are supplied to simplify installation, making the QUFL235 an ideal solution for both new-build and retrofit commercial or residential projects.

QUFL235

QUFL235 - 20/30/50W 3CCT Selectable Quinetic LED Floodlight Specifications:


- **Voltage range:** 220-240 V/AC
- **Frequency:** 50/60 Hz
- **Power:** 20/30/50W
- **Lumen Output:** 2000/3000/5000lm $\pm$ 5%
- **CCT Changeable:** 3000K/4000K/6000K
- **CRI**>80
- **Protection against electric shock:** Class I. Requires earth connection.
- **Ingress Protection:** IP65
- **Slide-in bracket and additional round bracket for easy installation**
- **Material:** Die cast Aluminium body with tempered glass diffuser
- **Ambient temperature range:** -20°C to +40°C
- **Complete with built-in Quinetic Receiver**
- **Control method:** pairing by using Quinetic Wireless Switches or QUPIR*
- **Control distance**:** - up to 15m indoor
- up to 60m outdoor

Product Dimensions:

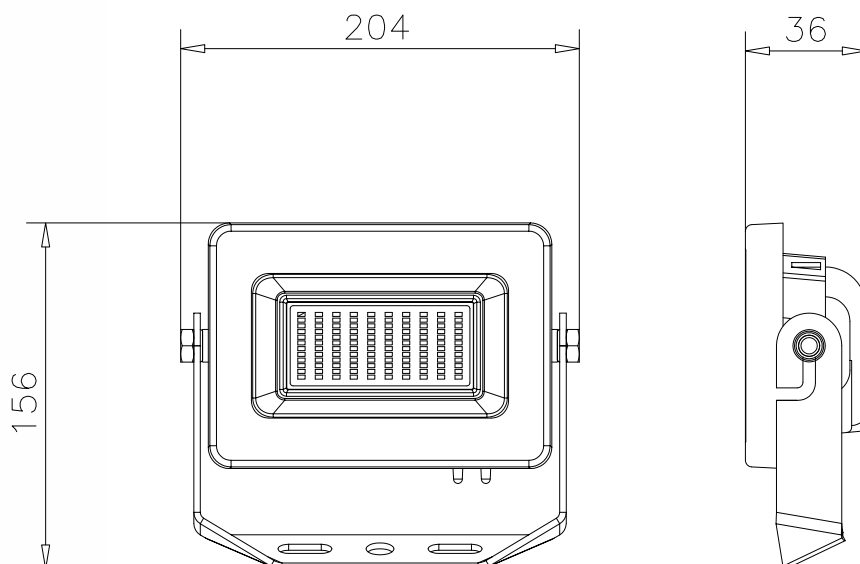

Changing the Wattage and Colour Temperature:

Use the toggle switch at the bottoms of the floodlight to change the wattage and colour temperature:

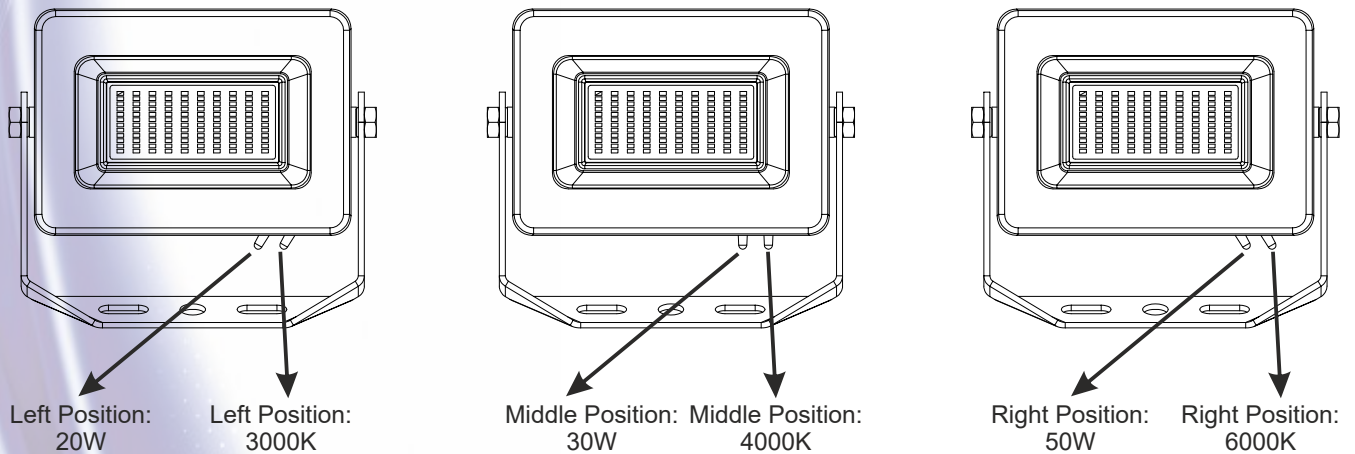

Quinetic Wireless Systems

The wireless Quinetic energy switch and Quinetic Floodlight can be paired with any combination: a floodlight can be controlled by a maximum of 10 separate switches, a switch can pair an unlimited number of floodlights.

1-Way Wireless System

Single-Multi-Control

Quinetic
Wireless Switch



Controller1



Controller n...



2-Way Wireless System

Quinetic
Wireless Switch 1



Dual Control

Quinetic
Wireless Switch 2



3-Way Wireless System

Quinetic
Wireless Switch 1



Multi-Single-Control

Quinetic
Wireless Switch 2



Quinetic
Wireless Switch 10

