

# QUGDCL

## Wireless Grid Switch Click Scolmore Instructions 80\*60mm

	<div data-bbox="607 288 965 368"></div> <div data-bbox="584 424 987 536"><h3>QUGDCL</h3><h4>Wireless Grid Switch</h4><p>Click Scolmore Minigrid Compatible</p></div> <div data-bbox="685 592 898 616"><p>Installation Instructions</p></div> <div data-bbox="584 703 987 791"><div></div><div></div><div></div><div></div><div></div><div></div></div>	<div data-bbox="1032 240 1447 264"><p>Read instructions carefully before installation</p></div> <div data-bbox="1088 296 1379 608"></div> <div data-bbox="1032 639 1447 711"><h3>Wireless Grid Switch</h3><p>Click Scolmore Minigrid Compatible</p></div> <div data-bbox="1111 735 1368 799"></div>	<div data-bbox="1469 233 1682 264"><h3>Specifications</h3></div> <div data-bbox="1469 264 1895 296"><h4>Wireless Grid Switch Technical Parameters:</h4></div> <div data-bbox="1469 296 1906 568"><p>Work Type: Push Button Power Source: Micro energy acquisition and self generating (no battery required) Number of Keys: 1 (1 gang) Control Distance: 25m (indoor) Communication Model: FSK Work Frequency: 433Hz Work Environment Temperature: -20°C ~ 55°C Control Method: Pairing with Quinetic Wireless Controller Compatible with Click Scolmore Minigrid Switch Plates Life Time: ≥100000 times 3 Year Warranty</p></div> <div data-bbox="1559 528 1783 735"></div> <div data-bbox="1469 743 1906 775"><p>* Distance comes from Quinetic laboratory test result. The actual distance in practical use might vary due to environmental difference.</p></div> <div data-bbox="1469 775 1906 807"><p>NOTE: The grid metal plate or cover might reduce the control distance, as the metal will cause electromagnetic shielding that blocks the RF signal.</p></div>
--	--	---	--

### Wireless Grid Switch Operation:

The Quinetic wireless grid switch is compatible with Click Scolmore Minigrid system and can be installed into Click Minigrid mounting plates. It can be used with the standard or with the dimming Quinetic receiving controller (see controller instructions for more details about pairing).

### Dimming Operation:

When paired with dimming Quinetic receiving controllers the grid switch can also dim the lights:

Pressing the switch quickly will turn the light ON/OFF. Keep the switch pressed to dim the light to the desired level.



While the switch is pressed the lights will go down from 100%-0% and they will go up from 0-100% cyclically.

### Quinetic Switch and Controller Wireless System:


The wireless Quinetic grid switch and wireless receiving controller can be paired in any combination: a controller can be controlled by a maximum of 10 separate switches, a switch can pair with an unlimited number of controllers.

### Installation Instructions:

1. Ensure the mounting box is securely fixed to the wall.
2. The Quinetic Click Scolmore Minigrid switch module is easily and quickly mounted onto Click Minigrid plates using screws for fixing (Fig.1).
3. Ensure no conductors into the mounting box are pinched or trapped.
4. If necessary the modules can be removed by unscrewing them out from the grid plate .
5. Place the front plate over the assembly and secure it with the screws provided (Fig.2). Do not over tighten the screws, to do so may damage the front plate, fixing screws or grid frame.



### Product dimensions:

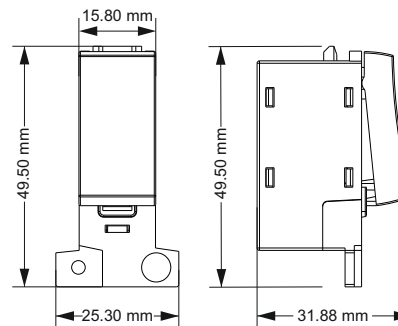

\*For more information about pairing, instructions and troubleshoot please visit [www.tlc-direct.co.uk](http://www.tlc-direct.co.uk) website.