



Screwless - 13A socket with USB

These instructions should be read carefully and retained after installation for further reference and maintenance.

SAFETY

- Before installation/maintenance, ensure that the mains supply is switched off and the circuit fuses are removed or circuit breakers switched off
- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations and current Building Regulations. If in any doubt, consult a qualified electrician
- 230V 50Hz
- Do no overload this accessory or subject it to conditions outside its rating
- Please recycle


SCREWLESS FRONT PLATE FIXING

- Always ensure the wall surface is flat and smooth
- Remove the front plate by placing a medium size flat head screwdriver in the notch at the side and lever off gently. Fix the main unit to the back box using the fixing screws supplied
- Clip the front plate back onto the main assembly, ensuring the screwdriver notch is at the side
- The main unit is fitted with a gasket, this MUST NOT be removed, this gasket is to stop discolouration of the front plate due to natural moisture in some wall finishes
- To maintain the finish of this product, periodically wipe over with a soft dry cloth only

INSTALLATION

- Connect this accessory as per the relevant diagrams
- All Earth connections must be made and maintained. Use green/yellow sleeving on earth conductors that are not insulated
- Fit the unit into a suitable wall box taking care not to compress, damage or trap any cables, and secure with the screws provided
- Check all connections are secure

WIRING

- **L - LIVE** = red or brown
- **N - NEUTRAL** = black or blue
-  **EARTH** = green and yellow
- All Screwless products MUST have an earth connection between the front plate and back box
- Use green and yellow sleeving on earth conductors that are not insulated

***Note** – if your installation uses four lug metal mounting box, remove the top and bottom lugs or bend fully back

IF IN ANY DOUBT PLEASE CONSULT A QUALIFIED ELECTRICIAN



USB Charger specification: 5V DC


Total combined output: Max. 2100mA

Caution


This socket is designed for charging portable USB devices only

This socket contains a short circuit and overload protection feature. If there is no power from the USB socket unplug the connected device. Check to ensure the USB socket and USB device has not come into contact with water, liquid or debris and the cable to the device is not damaged. With no device connected to the USB socket it will automatically reset and be ready for use.

1G 13A SWITCHED SOCKET

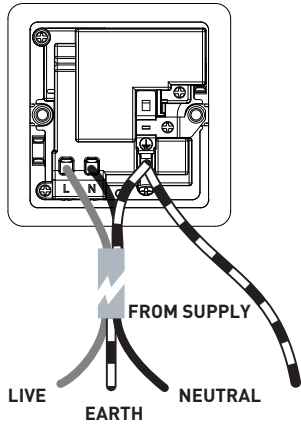

2G 13A SWITCHED SOCKET

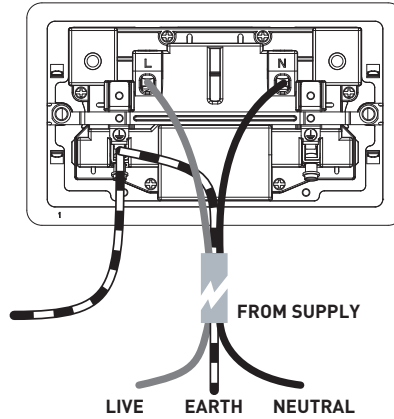

Knightsbridge[®]
the mark of quality