



Lighting and "Service" Connectors Series 224


PUSH WIRE®
CAGE CLAMP®

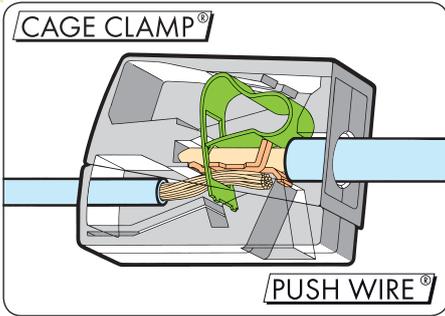

Installation side 1.0 – 2.5 mm ² "s" Lighting side 0.5 – 2.5 mm ² "s+f-st" 400 V/4 kV/2**; I _N 24A	AWG 14 – 12 AWG 20 – 16 300V,20A	Installation side 2 x 1.0 – 2.5 mm ² "s" Lighting side 0.5 – 2.5 mm ² "s+f-st" 400 V/4 kV/2**; I _N 24 A	AWG 16 – 14 AWG 20 – 16 300 V, 4 A [Ⓜ] [Ⓢ]
Ⓜ Approvals		Ⓢ Approvals	

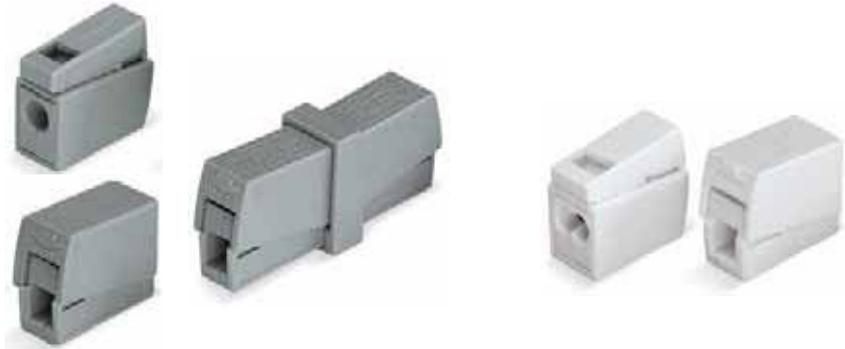

Stripped length

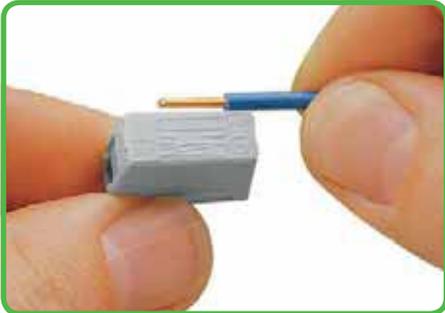

Strip conductor to 9 – 11 mm / 0.39 in.

Conductor termination



Lighting side terminations:
Press button fully and insert stripped conductor into square entry and release.



Installation side terminations:
Insert stripped solid conductor into entry and push until it hits the stop.

CAGE CLAMP® clamps the following copper conductors:







The PUSH WIRE® connection clamps the following copper conductors:



Ⓜ Approvals are available online at: www.wago.com.

Color	Item No.	PU	Color	Item No.	PU
Lighting connectors, standard version, continuous service temperature 105 °C, gray 224-101 1000 (10 x 100)			2-conductor lighting connectors, standard version, continuous service temperature 105 °C, white 224-112 1000 (10 x 100)		
Version for increased continuous service temperature 120 °C, black 224-104 100			Version for increased continuous service temperature 120 °C, black 224-114 100		
"Service" connector gray 224-201 50					

Dimensions (in mm) and handling

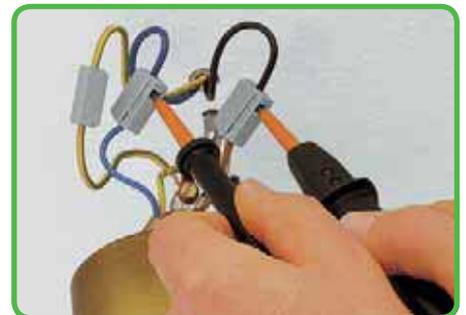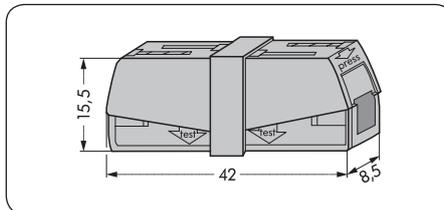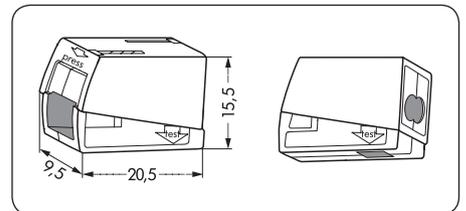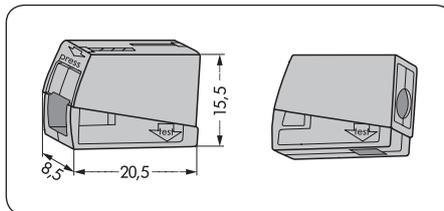

Testing through separate test slot.

Strip length, see packaging or instructions.