

Manufacturers & suppliers of monsoon products

# LED Shower light fan Kit



- The MONSOON LED Shower light is a distinctive shower light which is incorporated into a circular diffuser, suitable for showers and bathrooms
- Kit includes external grille, 1.5m flexible ducting, clips and white & chrome facias
- Available in 100mm (4")
- Extract rate up to 86m³/hr
- Exceeds Building Regulations for toilet and bathrooms
- Quick and easy installation

Call now to find out more: 01823 690 290

100mm Shower Light Fan Kit, complete with back draught shutter (fan with or without adjustable over run timer 1-20mins) with chrome/white fitting shower light and 12-volt LED Driver. Also comes with 1.5m PVC ducting, cables ties, screw plugs and external wall grille.

Warm light LED, Lumens output 180-200lm.

# **Installation**

Designed to be ceiling mounted through 102mm (4") diameter flexible ducting or rigid pipes.

# **Models**

CODE	DESCRIPTION				
MSFLK100SLED - S	Shower Fan Kit c/w LED Light – Standard				
MSFLK100SLED - T	Shower Fan Kit c/w LED Light – Timer				


# **Technical data**

	FAN	SOUND	MAX.	MAX.	MAX		FAN
	SIZE	VOLUME	PRESSURE	OPERATING	<b>AIR FLOW</b>	POWER	SPEED
CODE	MM	DB(A)	P.A	TEMP °C	L/S	CONSUMPTION	RPM
MSFLK100SLED	100	41	20	40	24	10.4	2400

### **Electrical**

12-volt DC 3W MR16 lamp. Powered by an LED Driver. Input, AC. Output - 12-volt DC. 1A

# **Dimensions (mm)**

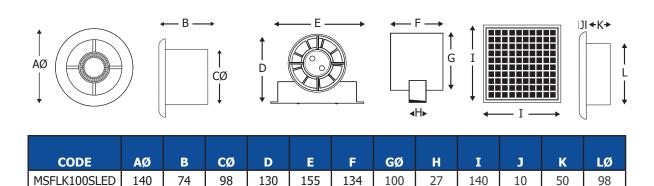

Call now to find out more: 01823 690 290