


Product Code: MD9014

Luckinslive 405678299

Description: 100W Dual Mode Dimmer Module with Trim

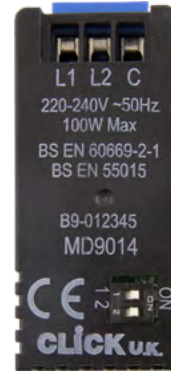

General Information

Dimensions (mm)	25 (W) x 57.5 (H) x 24.2 (D)	
Materials	Body: Nylon	Terminals: Brass
	Terminal Screws: Brass	PCB: Multiple Electronic Components
Operating Voltage (AC)	230	Frequency (Hz) 50
Load Rating (W)	5 - 100	
Load Rating Comments	Suitable For Dimming LED, Halogen, Incandescent & Dimmable Compact Fluorescent Loads	
Termination Type	Screw	
Terminal Size (mm)	Ø2.9	Terminal Torque Value (Nm) 0.2
Terminal Capacity - Solid (mm²)	2 x 1.5	
2 Way Switch	Yes	
Dimmer Technology Type	Trailing & Leading Edge	
Dimmer Load Type	Capacitive, Resistive & Inductive	
Minimum Brightness Programming	Available	
Minimum Back Box Depth (mm)	25 (35 Screwless & Flat Plate)	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	2	

Standards BS EN 60669, BS EN 55015, BS EN 61000

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

With the reduced housing height, the module is suitable for mounting directly above another MD9014 on a multi-tier mounting plate.

If mounting above each other and/or next to each other, take note of the loading of each module to prevent the potential of overheating.

