



HERITAGE

BRASS SWITCH

Installation Instructions

Catalogue Nos.
1920/30,
1920R30,
and
1920R30P

 **CLIPSAL**

Products of Gerard Industries Pty Ltd

ACN 007 873 529

12 Park Terrace, Bowden, South Australia 5007


Telephone (08) 269 0511 Facsimile (08) 340 1724

Offices in all states.

HERITAGE BRASS SWITCH

1920/30 Series 250V 10A a.c. only 1 way/2 way with Looping Terminal.
Round Surface Mounting, Heritage Switches.
Terminals accommodate 3 x 2.5mm² Cables Motor Rating M40.

1920/30(WE) SWITCHES

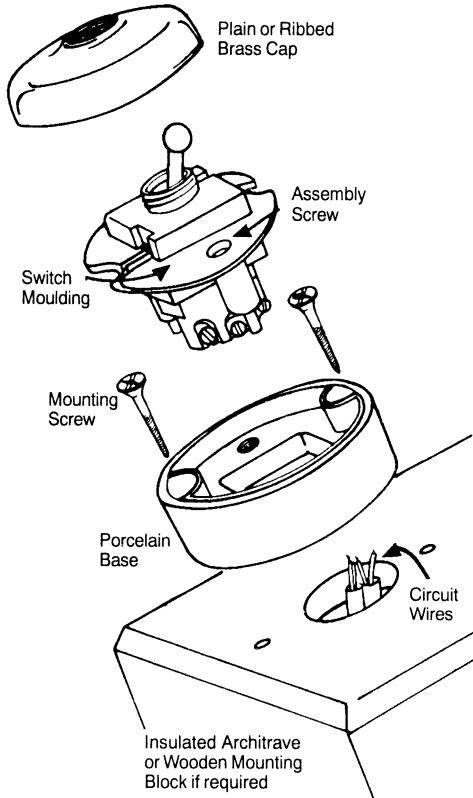


IMPORTANT WARNING - the 1920/30 Series


switches should be directly mounted onto appropriate wooden architrave or other fully insulated surface.

- 1 Remove brass cap. (Unscrew).
- 2 Remove switch moulding (2 screws), from porcelain base.
- 3 Mount porcelain base onto insulated surface over circuit wires (Mounting screws arranged horizontally).
- 4 Place circuit wires into appropriate terminals, then tighten terminal screws.
- 5 Replace switch moulding onto mounted porcelain base, taking care to orientate "250 V 10 A" engraving on toggle.
- 6 Replace brass cap.


Terminal Identification

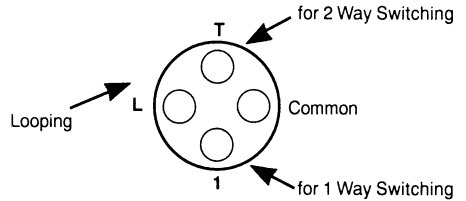

Schematic Diagram

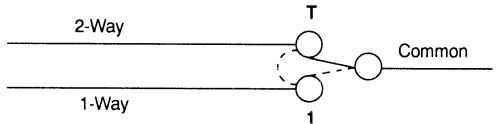

Wire Strip Length

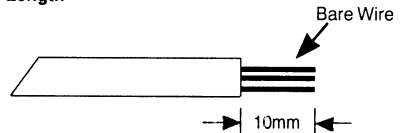

Note: All permanent electrical installations are required to be made by a licensed electrician, or similarly qualified person.