



Converting a DS1018MS & DR128MS into a Dual tier Dual split load board with 22 outgoing ways using the Defender Linking Kit DCA24

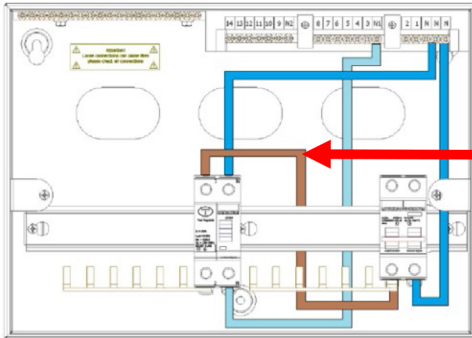

Remove the DS1018MS RCD supply cable

Fig 1.

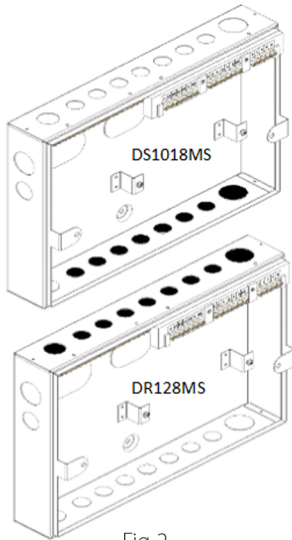

Remove the corresponding knockouts from both units and using the interconnect glands supplied, fix the two units together ensuring the lock rings are tightened correctly.

Fig 2.

