X Dimplex

BR Electric Towel Rails



Technical Specification

Controls

No external controls

Suitable for connection to thermostats, timers or regulators in accordance with IEE regulations

Cable

1 metre of electrical cable pre-fitted

Element

Vertical mounted immersion element

Connections

Installations must be carried out in accordance with current IEE wiring regulations

Construction

Sealed, liquid filled steel shell Water based fluid with glycol frost/corrosion inhibitor

Safety

Built in temperature limiter and overheat protection

Protection

IPX4 rated for use in wet areas

Installation Supplied with wall mounting points and brackets

Colour/Finish All models white stove enamel

Standard Warranty

12 months

Additional Information

Installation to radiator circuit

Removing bungs to inlet/outlet connections drains liquid. Connect to radiator circuit. Radiator refilled from radiator circuit and bled using valve concealed below top right header cap. Electrical connection as electric only installation.

BR150W / BR250 / BR400 / BR500


Product Description

Ladder design electric towel radiator

Key Features

- Ladder design maximises capacity for hanging damp towels and cloths
- No external controls
- Slim vertical design to maximise use of wall space even in confined areas
- Provided with inlet/outlet plumbing connections no adapters needed

Product Range Details

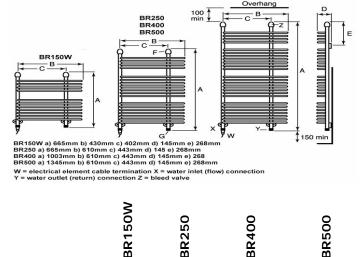

Performance				
No. of Rails	10	10	16	22
Output (electric) (W)	150	250	400	500
Dimensions				
Height (mm)	665	665	1003	1345
Width (mm)	430	610	610	610
Depth (mm)	145	145	145	145
Weight (kg)	6.5	9.0	15.0	20.0

Accessories

DX4123 - Dimplex energy regulator for BR150W/BR250 DX4124 – Dimplex energy regulator for BR400/BR500