
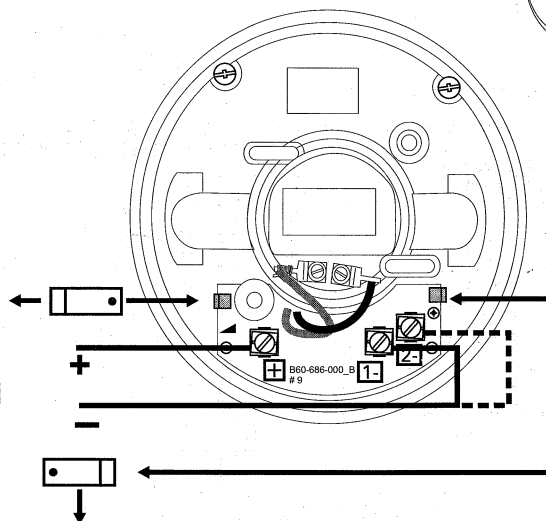
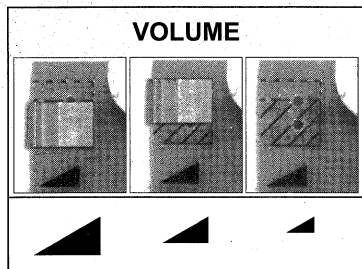


INSTALLATION INSTRUCTIONS FOR WALL MOUNT SOUNDERS TYPE DBS1224B4W



CONNECTION TERMINALS			LINK		
+	1-	2-	⊛	TONE	
✓	✓		✓	—	800Hz continuous
✓		✓	✓	⎓	800Hz/1000Hz alternating
✓	✓			—	500Hz/1200Hz slow whoop
✓		✓		⎓	800Hz DIN tone

Specification

Voltage Range
Output

12VDC (10V to 14V)
24VDC (21V to 27V)
max.92dB(A) @ 1mtr

Sounder Output data, in accordance with EN54-3, is available on request, or via the website (details below)
Document Ref. D531..

Current

12mA @ 24VDC (800Hz continuous, High Volume)

Max wire size



2.5mm²

Temperature Range

-30 to +70°C

Meets the requirements of EN54-3, Type A
IP21C, when fitted to an approved mounting box

INSTALLATION INSTRUCTIONS FOR WALL MOUNT SOUNDERS TYPE EMA1224B4R/W

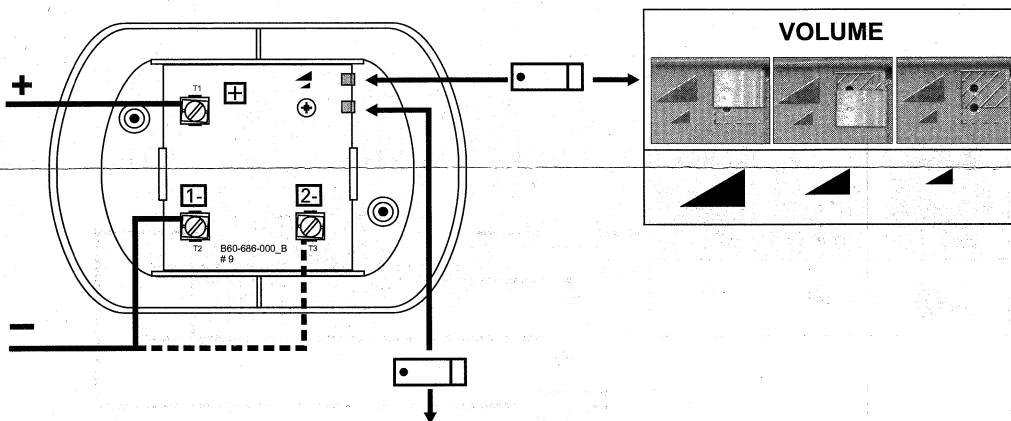

CONNECTION TERMINALS			LINK		
+	1-	2-	⊗	TONE	
✓	✓		✓	—	800Hz continuous
✓		✓	✓	⏏	800Hz/1000Hz alternating
✓	✓			—/—	500Hz/1200Hz slow whoop
✓		✓		⏏	800Hz DIN tone

Specification

Voltage Range

12VDC (10V to 14V)

24VDC (21V to 27V)

Output

max.97dB(A) @ 1mtr

Sounder Output data, in accordance with EN54-3, is available on request, or via the website (details below).

Document Ref. D531.

Current

12mA @ 24VDC (800Hz continuous, High Volume)

Max wire size

2.5mm²

Temperature Range

-30 to +70°C

IP Rating

Meets the requirements of EN54-3, Type A
IP21C, when fitted to an approved mounting box