





Hoods

НоЬѕ

**O**vens

Accessories



DR Cooker Hoods was established in 1979 to supply the new generation of cooker hoods to the electrical and kitchen trades. Their superior design made them much easier to install, they were Dual Function, that is they could be used in either ducted or recirculating mode and were widely acknowledged for setting new standards in the marketplace.

These new cooker hoods were supplied by Elica Spa of Italy, a fledgling company with great aspirations. The first models comprised two free-standing dual function hoods: the 60 Select and the 90 Deluxe in 2 colours, brown and white.

From these small beginnings, Elica went from strength to strength and is now the largest manufacturer of cooker hoods in the world. In this catalogue you will see an unequalled range from the most sophisticated, state-of-the-art Wave to the simple but effective freestanding models. The cornerstones of Elica's success are its innovative designs and the quality of its products; many of the same models sold in 1979 continue to be in daily use today and spare parts for these are still available.

DR Cooker Hoods has also flourished to become the major independent supplier in the market. We now offer the widest selection of cooker hoods in the UK, both the Elica range and our own Made in Great Britain County, Countess and Cove.

The latest addition to our product line is the Elichef range of cooking equipment created to enhance and



complement our Elica cooker hoods and accessories, From multifunction, fan, and conventional ovens to an array of hobs including, wok burners, gas, electric and ceramic. The requirements for every type

Hi-Tech manufacturing techniques, environmentally friendly practices and a constant commitment to superior products ensure the success of this new range. The built-in appliances for the range have also been scrupulously selected from throughout Europe, including the UK.

We also offer the best service to our customers by ensuring that all our products carry CE approvals and adhere to high standards of safety and performance. In addition, our trained, knowledgeable and approachable staff are dedicated to offering the best advice to both out trade

### contents

#### contents contents



| designer | 04 |
|----------|----|
|----------|----|

- countess 12
  - 13 county
- integrated 14
  - built in 16
- 20 freestanding
- copper & brass 22 tailor made
  - 23 accessories
- tech specifications 26





S

| 27 | o v e n s                           |
|----|-------------------------------------|
| 29 | hobs<br>-gas / electric<br>-ceramic |
| 31 | tech specification                  |

Whilst every effort is made to ensure that the information contained in this brochure is correct at the time of going to press, D R Cooker Hoods Ltd cannot be held responsible for any errors or omissions. Specifications may differ from those described or illustrated and D R Cooker Hoods Ltd reserve the right to change specification without prior notice.

Due to printing limitations colours and finishes are indicative only. If particular features, colours or sizes are important to you, please check with your Elica / Elichef retailer prior to purchasing,

Imaginative efficiency, purity of form. DR Cooker Hoods and Elica have used the very latest technology, to marry the beauty of the form and the power of extraction



designer


### fiji island

designer


A superb island design feature, with the Hi-Tech performance, to create a cleaner better atmosphere within the kitchen and adjoining rooms and to brilliantly illuminate the cooking surface. The most popular size of island cooker hood, 60cm x 90cm with corners cut to form an attractive octagon, reducing the possibility of corner contact with the chef's head.

- 4 speed selector switch.
- Quick release, washable metal grease filters.
- 2 x fluorescent lamps.
- 150mm (6") dia. duct spigot supplied.
- Type 160 charcoal filter required if recirculating.

Adjustable chimney flue.





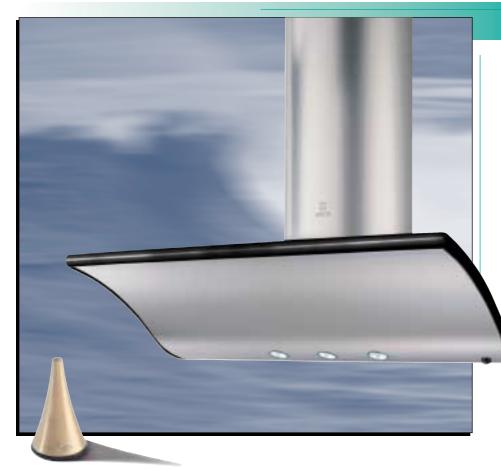

#### wave


#### Wave - from the David Lewis Collection.

This stylish cooker hood has the latest "state of the art" technology and can be remotely controlled by means of the small brass, infra red control unit, supplied.The six speed motor effectively removes cooking odors and the aluminium grease filter collects the airborn grease. Wave even tells you when the filters require maintenance! The 3 halogen lights, can be used on full power, or dimmed to suit the occassion. Motor and lights can be varied by either touch control or using the infra red control unit.

- 6 speed electronic with remote control unit.
- Stainless Steel grease filter.
- 3 halogen lamps.

esi

- 150mm (6") dia. duct spigot supplied.
- Charcoal filter required if recirculating.



n e

### sail

#### Sail - from the David Lewis Collection.


Using "state of the art" technology, Sail offers a stylish extractor complete with shelf unit fitted alongside for storage or decorative purposes. Sail has the facility for being remotely controlled by means of the small brass infra red control unit which is supplied with each hood.

- 6 speed electronic with remote control unit.
- Metal grease filter.
- 4 halogen lamps (2 on hood, 2 on shelf unit).
- I 50mm (6") dia. duct spigot supplied.
- Charcoal filter required if recirculating.

#### Available in:

#### 90cm + 90cm shelf.

Finish: Stainless Steel with Gold coloured panel.








### igloo

Igloo features twin tangential fans combining high performance and quieter running. The toughened glass beautifully crafted beneath the classic steel structure offers stylish and innovative design.

- 4 speed selector switch.
- Quick release, washable metal grease filter.
- 2 x 20w halogen lamps.
- 150mm (6") dia. duct spigot supplied.
- Type 160 charcoal filter required if recirculating.
- Adjustable chimney flue.

Available in: Stainless Steel with glass arc.




### tempest corner

With the Tempest features and multi-facet design, Tempest Corner, as one might expect, fits over the hob, which is placed across the corner of the kitchen (see line drawing).

- 4 speed selector switch.
- Quick release, washable metal grease filters.
- 2 x 20w halogen lamps.
- 125mm (5") dia. duct spigot supplied.
- 2 x type 100 charcoal filters required if recirculating.
- Adjustable chimney flue.

#### Available in:

Stainless Steel in the one size as illustrated.




395 278



designer designer designer designer



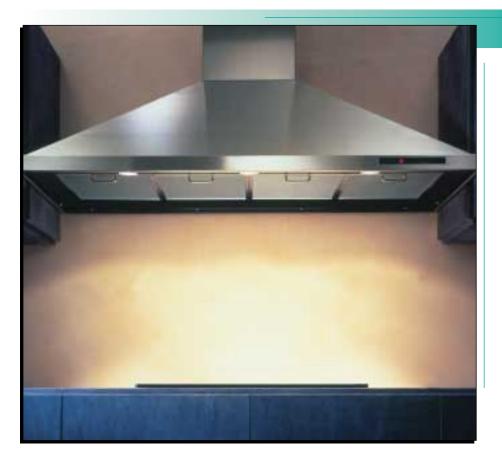

### typhoon


The sheer power of the Typhoon can match commercial installations. The high performance is achieved using low noise double tangential fans driven by slow start motors on special silentbloc rubber mountings.

- 4 speed electronic touch control.
- Quick release, washable metal grease filters.
- 2 x 20w halogen lamps.
- 125mm (5") dia. duct spigot supplied.
- Type 150 charcoal filter required if recirculating.
- Adjustable chimney flue.

Available in:

120cm width.

Finish: Stainless Steel, Black or White.



7


### tem<mark>pest</mark>

The truly attractive multi facet design with triangular chimney and the inspiring effect of the halogen lighting is simply stunning.

- 4 speed electronic touch control.
- Quick release, washable metal grease filters.
- 2 x 20w halogen lamps.
- 125mm (5") dia. duct spigot supplied.
- Type 150 charcoal filter required if recirculating 90cm version.
- 2 Type 100 charcoal filter required if recirculating 120cm version.
- · Adjustable chimney flue.

#### Available in:

90cm or 120cm width. Finish: Stainless Steel.







designer designer designer




cove

Cove stainless steel chimney hood has been designed to enhance and compliment 1100mm and 1000mm wide professional style range cookers. Fitted with our BI60T-3. This model can also be ordered as a special, finished in colours as our County Canopy hoods. The specification of Cove can be further enhanced, by requesting it with our BI60RM Remote Motor hood. (see page16, BI60RM for specification).

- 3 speed controls.
- Quick release metal grease filters.
- 2 x 40W hob lamps.
- I25mm (5") dia. duct spigot.
- Available with B160RM GR giving an airflow of 1000M3h (see B160RM GR for spec).

#### Available in:


100cm or 110cm widths. Finish: Stainless Steel, Green, Blue, Black, Cream, Maroon & White









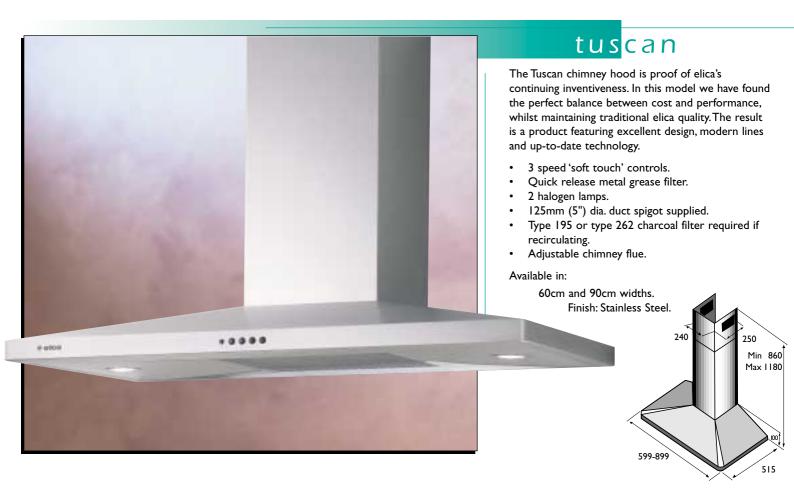



500

Available in:

designer e




#### tonda

This semi-round chimney hood provides the designer's answer to the fashionable "Curved" look for the kitchen.

- 4 speed slider switch.
- Quick release, washable metal grease filters.
- 2 x 40w hob lamps.
- 125mm (5") dia. duct spigot supplied.
- Pair of type 200 charcoal filters required if recirculating.
- Adjustable chimney flue.

#### Available in:




### zephyr

This unique softly curved shape precisely matches the mood created by today's leading kitchen designers.

- Variable slider switch.
- Quick release, washable metal grease filter.
- Fluorescent lamp.
- 125mm (5") dia. duct spigot supplied.
- Type 150 charcoal filter required if recirculating.
- Adjustable chimney flue.

Available in:

90cm width. Finish: Stainless Steel.





10 **designer** designer designer






#### tamaya

Attractive simple design presenting pleasing angles to offset the kitchen cabinets. The most modern motor fan design provides adequate ventilation of the average kitchen, using the minimum of energy.

- 3 speed slider switch.
- 2 x 40w hob lamps.
- Quick release, washable metal grease filters.
- 125mm (5") dia. duct spigot supplied.
- Pair of type 200 charcoal filters required
- if recirculating. Adjustable chimney flue.

Available in:

- 60cm & 90cm widths in White, Black & Stainless Steel.
- 70cm & 100cm widths in Stainless Steel only.



### camino

The beautiful high powered Camino continues to be popular with both designers and users. The chimney design allows for many variations to be produced giving a truly unique feature for your kitchen. Camino features a retractable lighting panel housing the controls and fluorescent lamp.


This retractable panel allows the lamp to be positioned for the optimum effect.

- 4 speed slider switch.
- Quick release, washable metal grease filters.
- Fluorescent lamp.
- 125mm (5") dia. duct spigot supplied.

40

- Type 150 charcoal filter required if recirculating.
- Adjustable chimney flue.
- Stainless Steel spice racks and back plate available as an optional extra (see accessories).

Available in: 60cm and 90cm widths. Finish: Black, White or Stainless steel.



490





d e s i 11 countess countess countess





### countess

12


Stylish and powerful canopy hood in the style and colours to enhance the 55 & 60cm range cookers. Fitted with either a brass or chrome bar to complete the traditional look.


Available in 3 variations. (see 'built-in' section for full specification on motors fitted).

- Countess with BI52-3 single motor hood with disposable grease filters. •
- Countess twin with BI60T-3 powerful twin motor hood with washable metal filters.
- Countess remote, fitted with built-in unit and Stainless Steel encased remote motor, can be ordered as a special.
- Brass bar fitted as standard on coloured countess.
- Chrome bar fitted as standard on Stainless Steel.
- Charcoal filter required if recirculating.
- Ducting required if ducting to outside (see ducting selection at back of brochure).

#### Available in:

Black, Cream, Maroon, Green, White, Blue, Stainless Steel. 60cm wide.




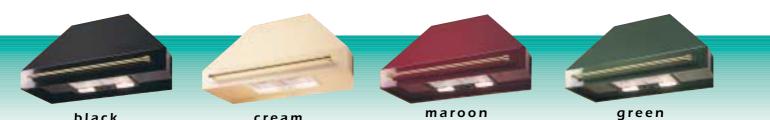

black

cream



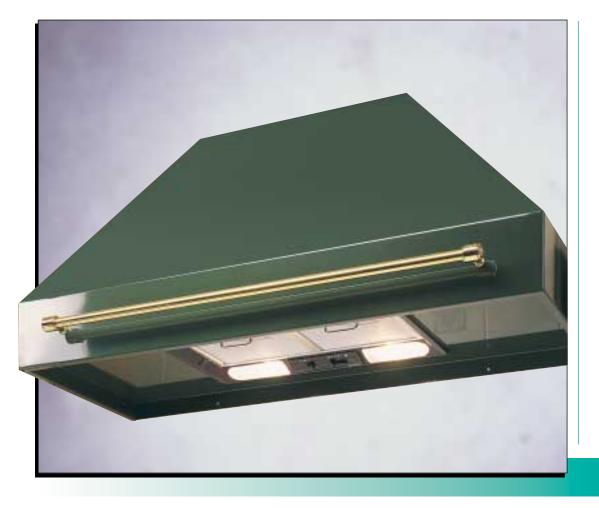

<mark>cou</mark>nty

Efficiency with Style and Colour. The size, the colour and design to compliment your range style cooker. Created to enhance the heart of the home and to improve the quality of the air within. County is designed as a canopy, so that the top line of the County matches up with the top of the kitchen cupboards. A tailor made chimney flue can be ordered as an optional extra.

#### Available in 3 variations


(see built-in section for full specification on motors fitted).

- County with BI0T-3 fitted.
- County UHS with BI80UHS fitted.
- County remote, fitted with built in unit and Stainless Steel encased remote motor, can be ordered as a special.
- Brass bar fitted as standard on colour canopies.
- Chrome bar fitted as standard on stainless steel.
- Charcoal filter required if recirculating.
- Ducting required if ducting to outside (see ducting selection at back of brochure).

#### Available in:

Black, Cream, Maroon, Green, White, Blue, Stainless Steel. 90cm, 100cm, 110cm and 120cm widths.

• a tailor made chimney flue can be made as an optional extra.





white

blue

stainless steel

DR Rainbow colour match system integrated hoods integrated hoods



All four models benefit from the elica double action door system. This system allows doors of a minimum height of 400mm, plus if required, an overlap at top or bottom. The opening or closing of the door also switches the power for the fan and the lamps both on and off, facilitated by the internal microswitch.

Elica Integrated models adjust to suit wall units from 270mm to 370mm deep and can be used in either the ducted or recirculating mode. Ducting from top or rear (see line drawing). INT60-3 & INTUHS60-5 have the provision for ducting horizontally out from the back within the height of the appliance, using the unique duct connector supplied with these superb models.


Both the INT60-3 and INTUHS60-5 have cassette-style quick release filters that fit easily into the dishwasher.



### INTUHS60-5

- Twin motor, high performance hood.
- 125mm (5") dia. ducting required or type 150 charcoal filter.
- Energy saving fluorescent lamp.
- 4 speed slider switch.
- · Quick release metal grease filters.

Finish: Neutral Grey



For all models.



- Single high performance motor.
- 100mm (4") dia. ducting required or type 150 charcoal filter.
- Twin 40w hob lamps.
- 3 speed slider switch.
- Quick release metal grease filters.
- Available in Neutral Grey.




### INT60-2

- Single motor.
- Twin 40w hob lamps.
- Disposable grease filter.
- 100mm (4") dia. ducting required or type 34 charcoal filter.
- Available in White, Brown or Grey.

### INT90-2

- Single motor.
- 100mm (4") dia. ducting required or type 34 charcoal filter.
- Twin 40w hob lamps.
- 3 speed slider switch.
- Disposable grease filter.
- Available in Neutral Grey.

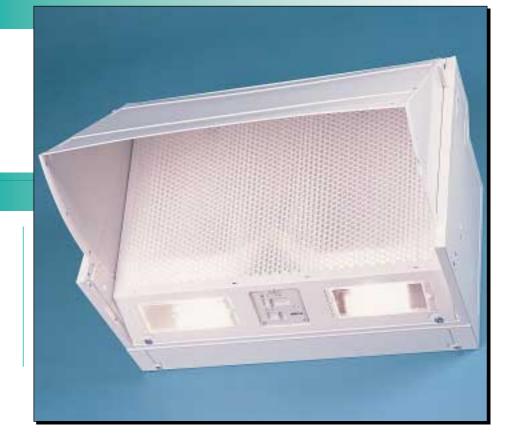



integrated hoods integrated hoods integrated hoods





The Elica Built In models are designed for fitting into the bottom surface of specially built canopies, 650mm to 800mm above the cooking hob.

These quality models can either be ducted to an outside wall (see Elica Freeflow Ducting leaflet), or may be used in the recirculating mode (a charcoal filter to be ordered). When used in this mode, provision must be made in the canopy for clean air to be vented back into the room.




#### BI60RM

Our new canopy hood offers a wider choice of powerful ventilation and less noise in the kitchen. Designed for connection to the remote motors (supplied), this extractor can be fitted into purpose built canopies, or several models from our range of hoods. the remote motors can be fitted externally or in the roof space as required. The powerful motors are fitted into an attractive stainless steel casing.

- Remote motor.
- Airflow to 1000 M3h..
- Variable speed control.
- Quick release, washable metal grease filters.
- 2 x 20w halogen lamps.
- 450mmW x 480mmH x 170mmD Stainless Steel encased motor unit.
- Ducting version only.
- 150mm (6") ducting connectors supplied.
- Cooker Hood size as BI60-3.


Available in Grey.



### BI80UHS




- Twin tangential high performance fans.
- 2 halogen lamps illuminate the cooking area.
- Quick release, easy clean metal grease filters.
- 150mm (6") duct connector supplied.
  - Type 200 charcoal filter required if recirculating.
  - Available in Black or Grey.



### BI80T-3

- Powerful twin motor Built In hood.
- Quick release easy clean metal grease filters.
- 2 x 40 watt hob lamps.
- 125mm (5") duct connector supplied.
- 2 x type 48 charcoal filters required if recirculating.
- Available in Black or White.







### built in hoods built in hoods built in hoods






- Single motor Built In hood.
- Quick release easy clean, metal grease filters.
- 2 x 40 watt hob lamps.
- 100mm (4") duct connector supplied.
- Type 48 charcoal filter required if recirculating.
- Available in Black or White.

### BI60T-3

- Twin motor Built In hood.
- Quick release easy clean, metal grease filters.
- 2 x 40 watt hob lamps.
- I25mm (5") duct connector supplied .
- 2 x type 48 charcoal filter required if recirculating.
- Available in Black, Grey, White and Stainless Steel.

### BI52-3

- Single motor Built In hood.
- Painted metal air inlet tray with disposable grease filter.
- 2 x 40 watt hob lamps.
- 100mm (4") duct connector supplied.
- Type 48 charcoal filter required if recirculating.
- Available in Black, White or Grey.



For models: BI52-3, BI60-3, BI60T-3.



#### built in hoods built in hoods uilt in hoods




### BI60DL




Special feature: This model can be remotely controlled if desired, by means of the de-mountable switch unit and 3 metre cable, allowing the controls to be placed in a worktop plinth or anywhere up to 3 metres away for easy access and use.

- Powerful twin motor.
- De-mountable switch and 3 metre control cable.
- Quick release easy clean, metal grease filters.
- Fluorescent lamp.
- 125mm (5") duct connector supplied.
- Type 150 charcoal filter required if recirculating.
- Available in Stainless Steel.



### SA 60-7G

- Single motor hood with slideaway panel.
- Quick release easy clean metal grease filters.
- 2 x 40 watt hob lamps.
- 125mm (5") duct connector supplied.
- Type 48 charcoal filter required if recirculating.Front panel may be removed and replaced with
- furniture light pelmet to match kitchen units. • Available in Grey.







### built in hoods built in hoods built in hoods

19

reestandin

freestanding <u>freestanding</u>



Elica freestanding cooker hoods, can be installed against the wall or directly below a cabinet above the cooker hob.

> Designed to compliment and enhance your kitchen facilities and fittings.


A wide choice of models, sizes and colours available.



#### concorde

- Single motor hood.
- Slimline design 130mm high.
- Adjustable tinted visor.
- 3 speed slider switch.
- $2 \times 40$ w hob lamp to illuminate the cooking surface.
- Disposable grease filter.
- Includes type 190 charcoal filter.
- I00mm (4") ducting spigot included.
- Can be ducted from the top or rear.

Available in: 60cm width. Black or White.

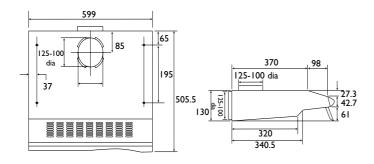

### concorde twin

- Twin motor hood.
- Slimline design 130mm high.
- Adjustable tinted visor.
- 3 speed slider switch.
- 2 x 40w hob lamp to illuminate the cooking surface.
- Metal washable grease filter.
- Includes type 190 charcoal filter.
- 125mm (5") ducting spigot included.
- Can be ducted from the top or rear.


Available in: 60cm width. Black, White or Stainless Steel.

This model is also available in 90cm width. Stainless Steel only.



### deluxe twin


- Twin motor hood.
- Adjustable tinted visor.
- 3 speed slider switch.
- 2 x 40w hob lamps to illuminate the cooking surface.
- Disposable grease filter.
- 125mm (5") ducting spigot included.
- Can be ducted from the top or rear.
- 2 type 34 charcoal filter required if recirculating.



### chic

- single motor hood.
- adjustable tinted visor.
- 3 speed slider switch.
- 40w hob lamp to illuminate the cooking surface.
- disposable grease filter.
- includes type 50 charcoal filter.
- 100mm (4") ducting spigot included.
- can be ducted from the top or rear.
- available in Black, Brown or White.

Available in 60cm width.







freestanding freestanding freestanding<sup>21</sup> 22

tailor made tailor made





DR Rainbow colour match system

> Any colour, swatch or fabric sample supplied can be matched.

Specially made hood (featuring 2x BI60DLSS, remote switched motor units).

Should your requirements differ from those from our vast selection of designer hoods, canopies and furniture hoods, backplates, colours and finishes. Then from your sketch, drawing, colour swatch or RAL number we would be pleased to quote and fabricate a hood to your own design, size, colour or finish.

Just fax a sketch or drawing of your requirements and within a short space of time we can offer a quotation.

We can match any colour, swatch or fabric sample supplied, either colour coding a model from our stock or a special hood fabricated to your design.

A choice of Brass, Chrome or Stainless Steel bars can be added to compliment the finished product if desired.


brass rose canopy (BRC)

Our Copper & Brass canopies are both practical and Beautiful. As these canopies are hand made in the styles as illustrated, each model will be unique in finish and detail. Canopies are finally coated with a clear hard lacquer to protect the natural material and to enhance your home for years to come.

All models are available in 60cm or 90cm widths. Fitted with our BI52-3 as standard.

Twin Motor or Remote Motor hoods can be fitted. Ask for a quotation.

Charcoal filters or Ducting required.



rippled copper (RCC)

hammered copper or brass (HC or HB)

#### copper & brass Copper & brass copper & brass



antique copper rose (ACR)



### A C C E S S O T I E accessories accessories

The opportunity of choice between the various models, sizes and finishes is still further extended by our range of accessories.

spice racks

These are not suitable for all models, but may be used singly or in pairs for practical use, or simply to enhance the overall effect.

Spice racks 60cm, 90cm or 120cm.

Finishes available: Stainless Steel, Black or White.





#### back plates

These may be installed between the bottom of the cooker hood and the worktop to provide a splash back, or behind some models in this range to further enhance the installation.

Backplates are 650cm or 750cm high and available in widths, 60cm, 70cm, 90cm, 100cm, 110cm and 120cm.


Finish: Stainless Steel bonded to MDF.

Special sizes available to order.

Chrome/Brass Utensil Bars 120cm long with fixing bracket may be cut to required length.

Chrome/Brass Utensil Hooks Our set of 5 hooks designed for use with our utensil bars.

Quality 5-piece Stainless Steel utensil set.



### plinth heaters

Built in electric fan heater designed for installation in standard kitchen furniture plinth line. I Kw or 2Kw heat settings. Neon indicator light to show heat setting selected.

Overall size of front panel: 470m x 120mm. Cut out size: 440mm x 95mm. Depth 240mm.


Finishes available: Stainless Steel, Brown or White.





### freeflow ducting kits


One of these ducting kits will be ideal for most situations. They are designed for cooker hoods with 100mm, 125mm or 150mm dia. ducting outlets.


#### 100mm (4") nominal










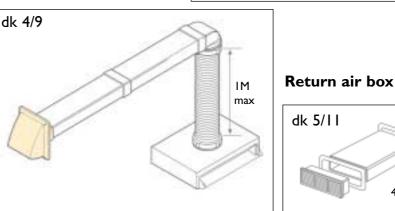





400mm

#### 125mm (5") nominal








#### IMPORTANT

150mm (6") nominal



The ducting chosen must be at least the same area as the spigot on the cooker hood. Spigot diameters will be 100mm (4") lower performance, 125mm (5") high performance 150mm (6") for very high performance hoods.

The use of smaller than the recommended ducting will adversely effect the designed performance as regards airflow and noise levels.

Please ask to see separate Freeflow Ducting leaflet for a complete range of ducting kits and components.

#### worktop ventilators - metal



These may be fitted into worktops, plinths etc to aid ventilation of appliances.

Cut-out size 464 x 66mm. Finishes available: Aluminium, Brass, Brown or White.



accessories accessories accessories

### lighting styles

#### halogen



white



black



chrome

Halogen downlighter kits for kitchens and bathrooms.


- 2 or 3 light sets complete with 12v electronic transformer
- protective glass lens
- 20w 12v Osram lamp
- spring fixings
- I 40mm connection lead
- downlight cap
- 60mm dia. cut out required for recessing

brass



metallic grey

HALKIT/2 B/W HALKIT/2 CH/BR HALKIT/3 B/W HALKIT/3 CH/BR HALKIT/4 B/W HALKIT/4 CH/BR HALKIT/5 W/B HALKIT/5 CH/BR HALKIT/2 METGR HALKIT/3 METGR HALKIT/LAMP Surface/recessed 2 Light Kit Black or White Surface/recessed 2 Light Kit Chrome or Brass Surface/recessed 3 Light Kit Black or White Surface/recessed 3 Light Kit Black or White Surface/recessed 4 Light Kit Black or White Surface/recessed 4 Light Kit Chrome or Brass Surface/recessed 5 Light Kit Black or White Surface/recessed 5 Light Kit Chrome or Brass Recessed 2 Light Kit Metallic Grey Recessed 3 Light Kit Metallic Grey 20W-12V Replacement Halogen Lamp

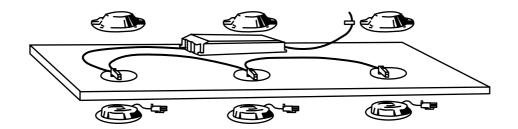

#### fluorescent





• fast easy fitting

- ready made connectors
- slimline 40mm high
- competitively priced
- anti corrosion treated
- parallel wiring allowing each light to be joined for any number of lights not exceeding 13 amps in total

Connection to the mains can be made using either pre wired mains lead CL01, I metres, or connected together using the CL04 male and female plug and socket. Blanking plates CL08 (male/female) should be fitted at the end of each light run to ensure complete electrical safety.

Replacement fluorescent tubes available for all lamp fittings.

When choosing the length required, allow 80mm each end for the linking connections.



#### accessories accessories accessories accessories

## <sup>26</sup> hoods tech spec

|              |                | FEATURES              |            |               |              |        |                  | TECHNICAL          |   |                  |                                     |  |                     |
|--------------|----------------|-----------------------|------------|---------------|--------------|--------|------------------|--------------------|---|------------------|-------------------------------------|--|---------------------|
| e            | tech spec      | COLOURS /<br>FINISHES | EXTRACTION | RECIRCULATION | SPEED LEVELS | LIGHTS | GREASE<br>FILTER | CHARCOAL<br>FILTER | EXTRACTION<br>RATE<br>(M <sup>3</sup> hr) | DBA<br>Min - Max | DISTANCE<br>ABOVE - GAS<br>(mm) min | DISTANCE ABOVE<br>ELECTRIC<br>(mm) min | TOTAL<br>RATING (w) |
|              | Tamaya         | Blk/Wht/SS            | •          | •             | 3            | 2      | Alum             | Op.extra CF/200    | 430                                       | 49-64            | 750                                 | 600                                    | 230                 |
|              | Camino         | Blk/Wht/SS            | ٠          | •             | 4            | I FI   | Alum             | Op.extra CF/150    | 600                                       | 51-72            | 750                                 | 650                                    | 200                 |
|              | Tuscan         | SS                    | •          | •             | 3            | 2Ha    | Alum             | Op.extra CF/195    | 600                                       | 46-64            | 750                                 | 600                                    | 210                 |
|              | Glacier        | SS                    | ٠          | •             | 3            | 2Ha    | Alum             | Op.extra CF/195    | 600                                       | 49-64            | 750                                 | 600                                    | 210                 |
|              | Tonda          | SS                    | •          | •             | 3            | 2      | Alum             | Op.extra CF/150    | 430                                       | 49-64            | 750                                 | 650                                    | 230                 |
|              | Zephyr         | SS                    | •          | •             | Vble         | I FI   | Alum             | Op.extra CF/150    | 480                                       | 51-71            | 750                                 | 650                                    | 295                 |
| БR           | Typhoon        | Blk/Wht/SS            | •          | •             | 3            | 3Ha    | Alum             | Op.extra CF/150    | 600                                       | 53-73            | 750                                 | 650                                    | 246                 |
| Z<br>ט       | Tempest        | SS                    | •          | •             | 4            | 2Ha    | Alum             | Op.extra CF/150    | 600                                       | 53-73            | 750                                 | 650                                    | 226                 |
| S I C        | Milano         | SS                    | •          | •             | 4            | 2Ha    | Alum             | Op.extra CF/195    | 600                                       | 49-64            | 700                                 | 600                                    | 210                 |
| Б            | Cove           | SS Colours            | ٠          | •             | 3/Vb         | 2      | Alum             | Op.extra CF/48     | 430/1000                                  | 54-69            | 750                                 | 650                                    | 320/Tba             |
|              | Igloo          | SS                    | •          | •             | 3            | 2Ha    | Alum             | Op.extra CF/160    | 600                                       | 46-68            | 700                                 | 600                                    | 240                 |
|              | Tempest Corner | SS                    | ٠          | •             | 4            | 2Ha    | Alum             | Op.extra CF/100    | 600                                       | 53-73            | 700                                 | 600                                    | 226                 |
|              | Wave           | SS/Blk                | •          | •             | 6            | 3Ha    | SS               | Op.extra CF/252    | 600                                       | 33-60            | 750                                 | 600                                    | 195                 |
|              | Sail           | SS/GId                | ٠          | •             | 6            | 4      | SS               | Op.extra tba       | tba                                       | tba              | 750                                 | 600                                    | tba                 |
|              | Iceberg        | SS                    | •          | •             | 3            | 4Ha    | Alum             | Op.extra CF/160    | 600                                       | 53-69            | 700                                 | 600                                    | 280                 |
|              | Fiji island    | SS                    | •          | •             | 4            | 2Ha    | Alum             | Op.extra CF/150    | 660                                       | 50-70            | 750                                 | 650                                    | 240                 |
|              | Countess       | SS Colours            | •          | •             | 3/4          | 2/4    | Paper            | Op.extra CF/48     | 240                                       | 53-65            | 750                                 | 650                                    | 200                 |
|              | County         | SS Colours            | •          | •             | 3/4          | 2/4    | Alum             | Op.extra 2xCF48    | 430                                       | 54-69            | 750                                 | 650                                    | 320                 |
| Ð            | INTUHS 60-5    | Grey                  | •          | •             | 4            | I FI   | Alum             | Op.extra CF/150    | 480                                       | 56-68            | 750                                 | 650                                    | 265                 |
| RATED        | INT 60-2       | Brn/Wht/Gr            | •          | •             | 3            | 2      | Paper            | Op.extra CF/34     | 240                                       | 44-56            | 750                                 | 650                                    | 200                 |
| INTEGF       | INT 90-2       | Grey                  | •          | •             | 3            | 2      | Paper            | Op.extra CF/34     | 240                                       | 44-56            | 750                                 | 650                                    | 200                 |
| Ξ            | INT 60-3       | Grey                  | •          | •             | 3            | 2      | Alum             | Op.extra CF/150    | 270                                       | 50-62            | 750                                 | 650                                    | 200                 |
|              | BI60RM         | Grey                  | •          |               | Vble         | 2Ha    | Alum             | N/A                | 1000                                      | Tba              | 750                                 | 650                                    | 226                 |
| Z<br>-       | BI52-3         | Blk/Wht               | •          | •             | 3            | I      | paper            | Op.extra CF/48     | 240                                       | 53-65            | 750                                 | 650                                    | 200                 |
|              | BI60-3         | Blk/Wht               | •          | •             | 3            | 2      | Alum             | Op.extra CF/48     | 240                                       | 53-65            | 750                                 | 650                                    | 200                 |
| UILT         | BI60T-3        | Blk/Wht/Gr/SS         | •          | •             | 3            | 2      | Alum             | Op.extra 2xCF48    | 430                                       | 54-69            | 750                                 | 650                                    | 320                 |
| B            | BI80T-3        | Blk/Wht               | •          | •             | 3            | 2      | Alum             | Op.extra 2xCF48    | 430                                       | 54-69            | 750                                 | 650                                    | 320                 |
|              | BI80UHS        | Blk/Gr                | •          | •             | 4            | 2Ha    | 2 Alum           | Op.extra CF/200    | 600                                       | 53-69            | 750                                 | 650                                    | 240                 |
|              | BI60DL         | SS                    | •          | •             | Vble         | I FI   | 2 Alum           | Op.extra CF/150    | 430                                       | 51-71            | 750                                 | 650                                    | 295                 |
|              | SA60-7G        | Grey                  | •          | ٠             | 3            | 2      | 2 Alum           | Op.extra CF/48     | 240                                       | 51-71            | 750                                 | 650                                    | 200                 |
| U<br>Z       | Concorde       | Blk/Wht               | •          | •             | 3            | 2      | Paper            | Inc. CF/190        | 240                                       | 52-67            | 750                                 | 650                                    | 200                 |
| FREESTANDING | Concorde Twin  | Blk/Wht/SS            | •          | •             | 3            | 2      | Alum             | Inc. CF/190        | 360                                       | 52-69            | 750                                 | 650                                    | 320                 |
| ESTA         | Deluxe Twin    | Br/Wht                | •          | •             | 3            | 2      | Paper            | Op.extra 2xCF34    | 320                                       | 51-68            | 650                                 | 750                                    | 320                 |
| FRE          | Chic           | Blk/Wht/Br            | •          | •             | 3            | Ι      | paper            | Inc. CF/50         | 210                                       | 51-61            | 650                                 | 750                                    | 140                 |
|              | Copper & Brass | -                     | •          | •             | 3            | Ι      | paper            | Op.extra CF/48     | 240                                       | 53-65            | 750                                 | 650                                    | 200                 |

Specifications, M<sup>3</sup>hr, DBA etc. are factual and verified by the manufacturer Elica Spa following exhaustive tests according to the European directive IEC61591.



The same commitment, care and expertise have gone into selecting 'elichef' cooking products, as our elica cooker hoods. We at D R Cooker Hoods Ltd are proud to present 'elichef'. A carefully specified range of cooking products to enhance our elica cooker hoods and accessories.

Elichef built in appliances have been selected from all corners of Europe, including the U.K. Hi-Tech manufacturing techniques, environmentally friendly manufacturing practices and innovative ideas ensure that all elichef products represent high quality, whilst offering value for money.

Every type of cooking is catered for, fan, conventional, wok cooking and ceramic hi lite hobs. Our multifunction and double ovens feature cooling fans, ventilating the doors, together with heat reflective glass, this ensures exterior surface temperatures are kept well below the statutory limits.

All our products carry CE approvals and the safety and performance of each model has been in the forefront of our thoughts when specifying 'elichef' cooking appliances.

We trust that you will agree, our selection of 'elichef' products have been cleverly designed to coordinate well with each other and blend with our elica cooker hoods.

#### DOUBLE MULTIFUNCTION OVEN

#### EFDMO900

Our eye level double multifunction oven offers a variety of cooking functions. The main oven is multifunction featuring 8 full cooking functions. The top conventional oven also houses a grill. A truly versatile double oven.

Bottom Oven - Main oven.

- Fully programmable (LED clock) multi function oven.
- Thermostatically controlled.
- Cooling fan.
- Triple glazed Cool door.
- Light only.
- Defrost (cold fan only).
- Conventional oven.
- Full fan oven.
- Half width grill.
- Full width grill.
- Top element and fan.
- Bottom element and fan.
- Drop down grill element for ease of cleaning.

Top Oven - Conventional

- Light.
- Triple glazed Cool door.
- Conventional oven.
- Variable grill.
- Top element only.
- Bottom element only.
- Drop down grill element for ease of cleaning.

Finish: Stainless Steel, Black or White Aperture required: 898H x 560D x 560W



#### SINGLE MULTIFUNCTION OVEN

#### EFSMO596

Top of our range single ovens EFSMO596 has 8 functions to satisfy the most discerning cook. Flexibility using the wide variety of cooking options.

1203

- Fully programmable (LED clock) multi function oven.
- Thermostatically controlled.
- Cooling fan.
- Triple glazed Cool door.
- Light only.
- Defrost (cold fan only).
- Conventional oven.
- Full fan oven.
- Half width grill.
- Full width grill.
- Variable grill.
- Top element and fan.
- Drop down grill element for easy cleaning.

Finish: Stainless Steel, Black or White.

Aperture required:  $585H \times 560W \times 560D$ .



#### SINGLE FAN OVEN

#### EFSFO188

True fan oven cooking with even temperature throughout the oven. Reduced cooking time, fast warm up, Variable grill.

- Fully programmable (LED clock) fan oven.
- Full fan oven fast warm up..
- Light.
- Defrost.
- Variable grill.
- Cool door, inner reflective glass.
- Fan forced cooking.

Finish: Stainless Steel, Black or White.

Aperture required:  $580H \times 560W \times 560D$ .





#### SINGLE CONVENTIONAL OVEN

#### EFSCO438


Traditional cooking utilising heat from both top and bottom elements.

- 60 minute minder.
- Light.
- 4 Functions.
- Bottom element only.
- Top element only.
- Conventional cooking (top & bottom elements)

- Cool door, inner reflective glass.
- variable grill.

Finish: Black or White.

Aperture required: 580H x 560D x 560W.










gas/electric hobs

gas/electric hobs gas/electric hobs

### GAS HOB

#### EFGSH430

- 4 Burners 2x 1.75Kw, 1x 3Kx and 1x 1Kw.
- Electronic ignition.
- 2 Piece black enamelled pan supports.
- Slimline 30mm depth.
- LPG injectors available.
- Side controls.
- Aperture required: 560W x 480D.
- Finish: Stainless Steel, Black or White.



GAS HOB

29



#### EFGSH530

- 5 Burners 2x 1.75Kw, 1x 3Kx, 1x 1Kw and I Triple Crown Wok Burner.
- Enamelled pan supports.
- Electronic ignition on control knob.
- Aperture required: 560W x 480D.
- LPG conversion jets supplied.
- Finish: Stainless Steel.

### ELECTRIC HOB

#### EFELH430

- 4 Cooking zones 2x 1Kw 2x 2Kw.
- Slimline 30mm depth.
- Power on light.
- Heat residual light.
- Aperture required: 560W x 480D.
- Finish: Stainless Steel, Black or White.



ceramic hobs


#### ceramic hobs

#### FRAMELESS HI-LITE HOB

#### EFFCH460

- 4 Radiant Zones.
- Ground edge glass.
- Sealed controls for easy cleaning.
- Residual heat indicator.
- Temperature limiter safety system.
- Slimline depth, installs within a standard worktop.
- Aperture required: 550W x 480D.
- Finish: Black Ceramic Glass with 4 black and 4 white control knobs, to suit most installations.





#### CHAMFERED EDGE CERAMIC HOB

#### EFFCH544

- 4 Rapid response ribbon heaters. 2x1200W, 1x1400W, 1x1800W.
- Chamfered glass for sophisticated appearance.
- High transmission glass-ceramic for improved cooking efficiency.
- Side controls, 4 rotary control knobs.
- Residual heat indicator light.
- Aperture required: 560W x 490D.
- Finish: Black or White Ceramic Glass.

#### FRAMELESS TOUCH CONTROL HOB

#### EFTCC545

- 4 Rapid response ribbon heaters. Ix700W/I700W dual circuit element. Ix1400W and 2x1200W.
- Touch controls.
- Childproof lock indicator.
- Hob-hot warning feature.
- Aperture required: 560W x 490D.
- Finish: Black Ceramic Glass.






# elichef

# ovens tech spec

| RANGE:  | Conv.*<br>OVEN | Fan*<br>OVEN | Multi*<br>OVEN | Multi <sup>**</sup><br>OVEN |                      |
|---|----------------|--------------|----------------|-----------------------------|----------------------|
| FEATURES MODEL No.  | EFSCO 438      | EFSFO 188    | EFSMO 596      | EFDMO 900                   |                      |
| GENERAL   |                |              |                |                             | APERTURE             |
| Oven Capacity (L)<br>No. of Cooking Functions                 | 52             | 52           | 52<br>8        | 52/28<br>12                 | (see grid for sizes) |
| Cavity Cooling Fan  | 5              | 4            | °<br>✓         | 12                          |                      |
| Normal Grill  | 1              | -            | 1              | <i>v</i>                    |                      |
| Extra Width Grill   | <u> </u>       | -            | 1              | 1                           |                      |
| Variable Grill  | 1              | 1            |                |                             |                      |
| Interior Light  | 1              | 1            | ~              |                             |                      |
| CLEANING  |                |              |                |                             |                      |
| Drop Down Grill Element<br>Stay Clean Liners (Optional extra) | -              | -            |                |                             | Н                    |
| , , , ,   | v v            | <i>v</i>     | · ·            |                             | н                    |
| PROGRAMMING   |                | ,            |                |                             |                      |
| Electronic Programmer<br>Minute Minder                        | -              |              |                |                             |                      |
|   | v              | <i>v</i>     | 1              |                             |                      |
| OPERATING   |                |              |                |                             | W                    |
| Function Selector<br>Temperature thermostat                   |                |              |                |                             | W J D                |
| Oven on pilot light   | 1              | v<br>V       | 1              | <i>v</i>                    | OVERALL              |
| Thermostat pilot light  | 1              |              | 1              | 1                           | (see grid for sizes) |
| SAFETY  |                |              |                |                             | (see grid ior sizes) |
| Safety Door   | 1              | 1            | 1              | 1                           |                      |
| Triple Glazed "Cool touch" door                               | -              | -            | 1              | 1                           |                      |
| TECHNICAL DATA  |                |              |                |                             | EFDMO 900**          |
| Total Power   | 2064w          | 2190w        | 2675w          | 4740w                       | $\leq$               |
| Main Grill  | 1800w          | 1800w        | 1800w / 2600w  | 1800w / 2600w               | OVERALL              |
|   | -<br>230v 50Hz | -            | -<br>230v 50Hz | 1800w<br>230y 50Hz          | (see grid for sizes) |
| Voltage/Frequency (V/Hz)                                      | 230V 50HZ      | 230v 50Hz    | 230V 50Hz      | 230V 50Hz                   |                      |
| FINISHES  |                |              |                | ,                           |                      |
| Stainless steel<br>Black                                      | -<br>V         | <i>.</i>     |                |                             |                      |
| White   |                |              |                | <i>,</i>                    |                      |
| ACCESSORIES   |                | v            | ·              |                             |                      |
| Enamelled Grill Pan with Grid and Handle                      | 1              | 1            | 1              |                             |                      |
| Chrome Shelves  | 2              | 2            | 2              | 3                           |                      |
| DIMENSIONS Aperture (mm)                                      |                |              |                |                             |                      |
| Width   | 560            | 560          | 570            | 560                         |                      |
| Depth   | 560            | 560          | 560<br>560     | 560                         |                      |
| Height  | 580            | 580          | 585            | 898                         | APERTURE             |
| DIMENSIONS Overall (mm)                                       |                |              |                |                             | (see grid for sizes) |
| Width   | 596            | 596          | 598            | 598                         | ,                    |
| Depth   | 540            | 540          | 540            | 540                         |                      |
| Height  | 596            | 596          | 596            | 900                         |                      |

#### gas/electric/ceramic hobs tech spec

|                                    | RANGE:         | Gas*<br>HOB | Electric*<br>HOB | Gas**<br>HOB | ceramic<br>HOB | Ceramic<br>HOB | Ceramic<br>HOB |
|------------------------------------|----------------|-------------|------------------|--------------|----------------|----------------|----------------|
| FEATURES                           | MODEL No.      | EFGSH 430   | EFELH 430        | EFGSH 530    | EFFCH 460      | EFFCH 544      | EFTCC 545      |
| GENERAL                            |                |             |                  |              |                |                |                |
| Tempered glass surface             |                | -           | -                | -            | 1              | 1              | 1              |
| No. of hot plates - gas            |                | 4           | -                | 5            | -              | -              | -              |
| No. of hot plates - electric       |                | -           | 4                | -            | 4              | 4              | 4              |
| Central wok burner                 |                | -           | -                | 1            | -              | -              | -              |
| Electronic ignition                |                | 1           | -                | 1            | -              | -              | -              |
| Enamelled grids                    |                | 1           | -                | 1            | -              | -              | -              |
| Electricity cable                  |                | 1           | 1                | 1            | -              | -              | -              |
| TECHNICAL DATA                     |                |             |                  |              |                |                |                |
| Hot plate power & dimens           | sions          | 1.0         | 1.5              | 1.4          | 1.2            | 1.2            | 1.2            |
| Front right                        |                | 3.0         | 1.5              | 1.0          | 1.5            | 1.8            | 1.8            |
| Front left                         |                | 1.75        | 2.0              | 3.0          | 1.5            | 1.2            | 1.2            |
| Back right                         |                | 1.75        | 1.0              | 1.75         | 1.2            | 1.4            | 1.4            |
| Back left                          |                | -           | -                | 3.35         | -              | -              | -              |
| Middle                             |                | 7.5kw       | 6.0kw            | 10.5kw       | -              | -              | -              |
| Total gas power                    |                | -           | 6.0kw            | -            | 5.4kw          | 5.6kw          | 5.6kw          |
| Total electric power Voltage / Fro | equency (V/Hz) | 230v/50hz   | 230k/50hz        | 230v/50hz    | 230v/50hz      | 230k/50hz      | 230k/50hz      |
| DIMENSIONS Aperture (mm)           |                |             |                  |              |                |                |                |
| Width                              |                | 560         | 560              | 560          | 550            | 560            | 560            |
| Depth                              |                | 480         | 480              | 480          | 480            | 490            | 490            |
| Height                             |                | 30          | 30               | 30           | 40             | 45             | 45             |
| DIMENSIONS Overall (mm)            |                |             |                  |              |                |                |                |
| Width                              |                | 580         | 580              | 680          | 580            | 580            | 580            |
| Depth                              |                | 500         | 500              | 500          | 510            | 510            | 510            |
|                                    |                |             |                  |              |                |                |                |









**D R Cooker Hoods Ltd** Elica House **10 Invincible Road** Farnborough Hampshire GUI4 7QU

Telephone: 01252 515355 Fax:01252 540194

e-mail : sales@drcookerhoods.co.uk www.cookerhoods.net www.elichef.com

> designed by **Byron Creative Organisation** April 2001