




IMPULSO 4 zones aspiration hobs


November 2023

IMPULSO 60 – Specs

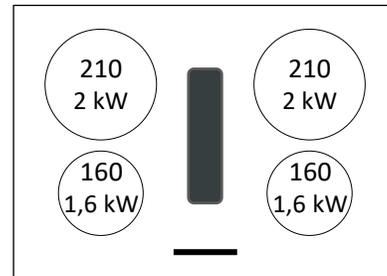

Brand	TURBOAIR
Model	IMPULSO
PRF	PRF0193253
EAN	8020283058712
Energy Class	A
Warranty	2/3 years (based on country regulation)
Finishing	Black
Size	60 cm
Cut-out	56 x 49 cm
Glass	ILVA + Eurokera
ASPIRATION	
Configuration	Duct-out convertible in filtering
Control hood	Slider TC 4+B
Airflow	205 - 475 - 580 m ³ /h
Noise level	45 - 61 - 67 dB(A)
Odour filters	Ceramic, regenerable
Functions	Autocapture Timer Maintenance alarm
COOKING	
Induction	Copreci
Control hob	Slider TC 9+B
Absorption	7,2 KW
Power limitation	Yes 3,1/4,5
Cooking zones	4
Size cooking zones	2 - Ø 21 cm @2 kW 2 - Ø 16 cm @1,6 kW
Bridge zone	No
Functions	Keep warm Stop&Go Timer Residual heat indicator Child Lock

IMPULSO 80 – Specs

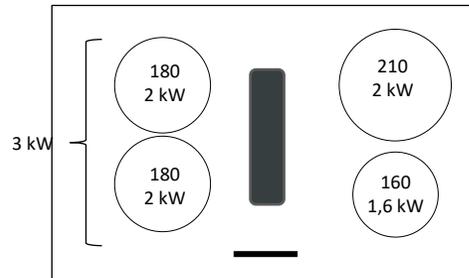

Brand	TURBOAIR
Model	IMPULSO
PRF	PRF0193254
EAN	8020283058729
Energy Class	A
Warranty	2/3 years (based on country regulation)
Finishing	Black
Size	83 cm
Cut-out	75 x 49 cm
Glass	ILVA + Eurokera
ASPIRATION	
Configuration	Duct-out convertible in filtering
Control hood	Slider TC 4+B
Airflow	205 - 475 - 580 m ³ /h
Noise level	45 - 61 - 67 dB(A)
Odour filters	Ceramic, regenerable
Functions	Autocapture Timer Maintenance alarm
COOKING	
Induction	Copreci
Control hob	Slider TC 9+B
Absorption	7,2 KW
Power limitation	Yes 3,1/4,5
Cooking zones	4
Size cooking zones	2 - Ø 18 cm @2 kW 1 - Ø 21 cm @2 kW 1 - Ø 16 cm @1,6 kW
Bridge zone	Yes - left
Functions	Keep warm Stop&Go Timer Residual heat indicator Child Lock

BENEFIT

A product where **essential lines** blends scrupulous attention to details, perfectly **fitting any kitchen style**. The flat cooking surface **guarantees easy and ergonomic movements** with pots and pans of different dimensions, and moreover **preserve the rapid cleanability** of traditional induction hobs.

Designed to easily **overcome possible kitchen structural constraints** in terms of installation, offering uncountable installation solutions.

Focus only on your recipe without worry about bad odors, since Impulso **automatically sets the most suitable extraction power**.

The maintenance is extremely easy and the filters are efficient and longlasting, thus eco-friendly.



REASON WHY

The **black glass surface** is enriched by the **black aluminum grid**, a minimal aesthetic studied to be seamlessly integrated into different kitchen styles.

In addition to several duct-out installation solutions, in recycling mode is possible to choose among up to three solutions: pipes **guided (plinth in and plinth out)** or in an easier way **unguided (back outlet)**, **saving plastic**.

The **Autocapture** mode automatically regulates the air extraction depending on the number and power of the cooking zones being used. The high extraction speed is about 5 times faster than the speed of rising fumes, **impressively silent** with just **61 dB(A)** and A energy class rating.

Grease and odor filters **can be easily removed from the top** of the hob. The ceramic odour filters **efficiency (80%)** last for **up to 5 years**, because **they can be regenerated**.



GREEN
INDUCTION

GREEN INDUCTION

Cooking has never been so **convenient**, for the **user** and for the **environment**.

Thanks to a **clever technology in power management** optimal results can be achieved at **intermediate levels**, when there is the need to **maintain the cooking in a stable and controlled status**.

On the other side reaching the **boiling point takes only few minutes while saving about 25% of energy if compared with standard induction hobs**.



COMFORT
SILENCE

COMFORT SILENCE

With the widespread tendency to design open-plan kitchens joined to the living room, it has become important to be able to rely on hoods with a greater extraction capability which are **quieter, so they do not intrude on the surroundings**.

Impressively silent, the sound level of Impulso at maximum extraction speed is just 61 dB(A), it does not disturb or interfere with the conversation of those present.



AUTO
CAPTURE

AUTOCAPTURE

With **Autocapture**, you will not have to worry about adjusting extraction based on what you are cooking. **The hood will identify the cooking areas that are active and set the power accordingly, finding the best balance between silence, power and energy efficiency**. And when you have finished cooking, the system gradually decreases the speed, eliminating any residual fumes and odours. The extraction hob becomes even more functional and practical for perfect cooking and excellent extraction.



WARMING MODE

The function is designed for slow cooking and is ideal for heating up liquid dishes such as milk and broths, but also creams and sauces, without having to worry about them overheating. In addition, with Warming Mode you can keep ready-made food warm while other preparations are in progress.



STOP&GO

Sometimes you need to unexpectedly leave the kitchen in the middle of preparing a recipe, interrupting the cooking. The Stop&Go function allows you to suspend with one single gesture all the active functions, and then restart them and recover the same previous setting with a simple press of a button, combining safety, cooking result and multitasking management



POWER LIMITATION

Power Limitation is set during installation, the maximum power absorbed by the product is limited, thus ensuring that you never exceed the pre-set limit. As a result, you can cook efficiently with no interruptions in total safety.



CHILD LOCK

If you have children in your home, the Child Lock function is invaluable for ensuring the cooking or extraction areas are not accidentally switched on. The function can be enabled when the product is switched on, but the cooking areas and extraction are switched off.



TIMER

Forget about cooking times by turning on the timer. Just set the minutes and start the countdown. At the end, the cooking area will be automatically switched off and a beeper will sound. You can set independent timers on more than one area at the same time with the touch remote control.



LONG LIFE FILTER ++

This filter is suitable for the most challenging cooking environments, given its superior ability to filter and purify the air. The Elica technology achieves filtering thresholds of 80% against the market average of 60%. The ceramic activated carbon filters will become saturated after a prolonged period of use, depending on the type of cooking and frequency with which the grease filters are cleaned. These odour filters can be regenerated every 2/3 months in an oven preheated to 200° C for ~~one hour~~. Regeneration allows a maximum filter lifespan of 5 years.



EASY TO MAINTAIN

All the components, such as the grease and odour filters, can be easily accessed and removed from the top, without unmounting the drawers, so they can be washed or rapidly replaced. Thanks to the opening under the aluminum profile, it is possible to clean the internal compartment in total safety. Finally, any crumbs or other elements that have fallen into the central inlet can be collected and removed with few simple gestures. If liquids accidentally or excessively leak out of the pots, the drain valve located on the lower part of the product can be opened so as to remove any residue and be able to clean in conditions of maximum hygiene.



MAINTENANCE ALARM

The light indicator provides an alert when the grease and odour filters are about to reach their maximum saturation. So you always know when you need to wash or replace them and you can keep your product clean and functional over time.



DELAY SWITCH OFF

A smart timer function that allows the user to set the automatic shutdown for all the speeds after a predetermined time. The Delay Switch off can be used by those consumers who want to leave the hood operating for a programmed time to completely remove odors that may persist after some intensive cooking sessions.

HANDY INTERACTION

Thanks to the highly intuitive touch control panel, the cooking zones and the hood are **controlled easily and intuitively**: the **slider touch control, both for the 4 cooking zones and for the aspiration** with 4 speeds + booster. Each zone is **very simple to monitor** thanks to the **red backlight indicators**, that show the set power level.




EASY ACCESS

All the filters, grease and odour can be removed from the top, without unmounting the drawers.





The products integrates a special simplified extraction system that allows to insert from the top side of the product **2 filtering ceramic blocks**. Thanks to their regeneration properties, maintenance can be done every 3 month putting the blocks in the oven at a temperature of **200° for 45 min.**

Filters can work maintaining a constant efficiency **up to 5 Years.**




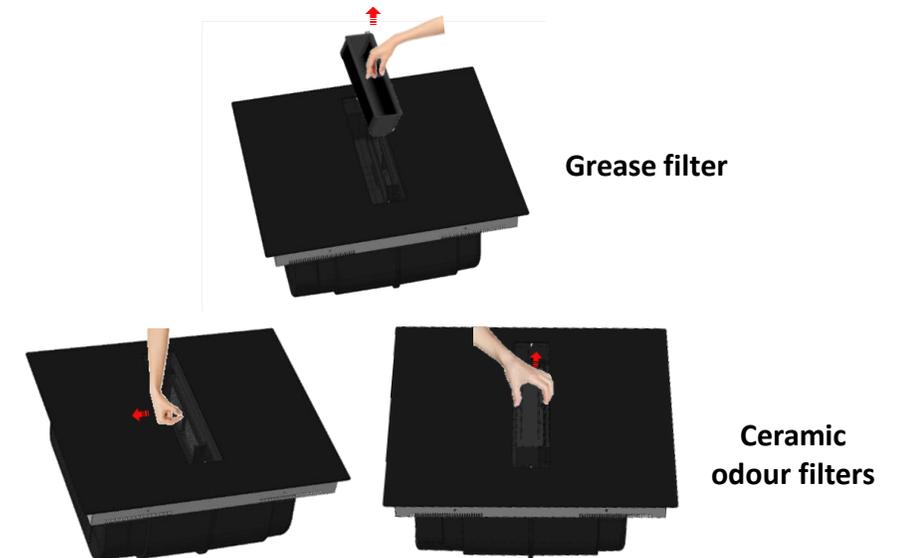



IMPULSO	
VERSION	Exhaust convertible in filtering
DIMENSION	60/83 x 51,5 cm
COLOR	Black
USER INTERFACE	Single Slider red backlights
COOKING ZONES	4
EXTRACTION LEVELS	4 Speed + 1 Booster
ENERGY CLASS	A
AIFLOW (BOOST)	570 m3/h
NOISE (MAX)	61 dB(A)
GREASE FILTER	3D Aluminium filter
ODOUR FILTER	Ceramic Long Life ++

Impulso 60




Impulso 83



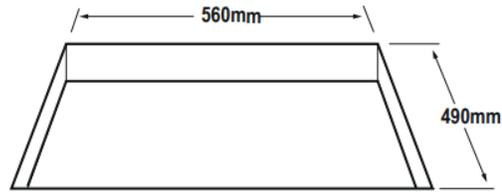


Cut-out 60 cm version

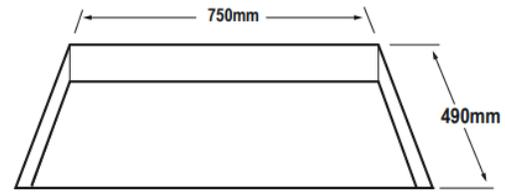


Cut-out 83 cm version

Exhaust

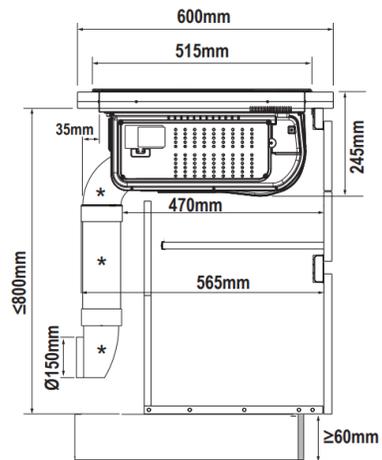


Back exit

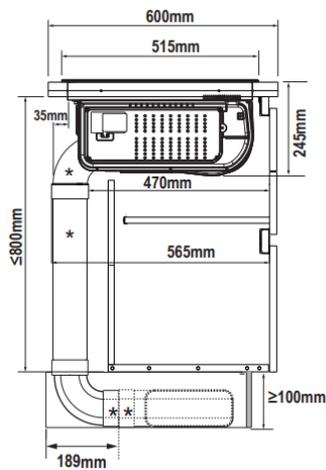


Under plinth exit

Recycling

Guided

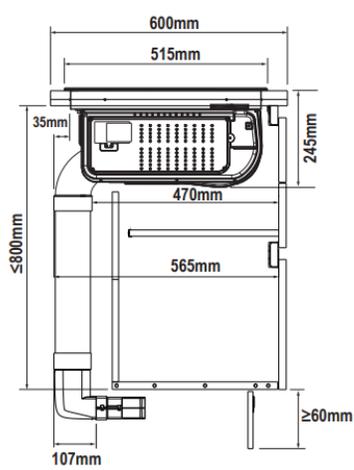


Plinth in

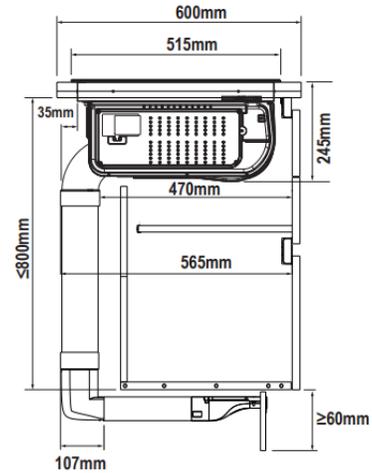

Plinth out

Unguided

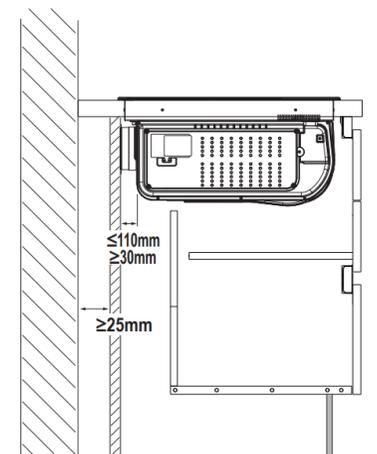


Back outlet

Elica new installation system permits the conversion at any time, in fact the back outlet position of the product is compliant for both installation versions. No pipes are included in the packaging so to have maximum flexibility, user customization and plastic saving (use only the pipes that is needed for the specific project).

Exhaust version

No pipes included in the packaging


pipes for installation as accessory

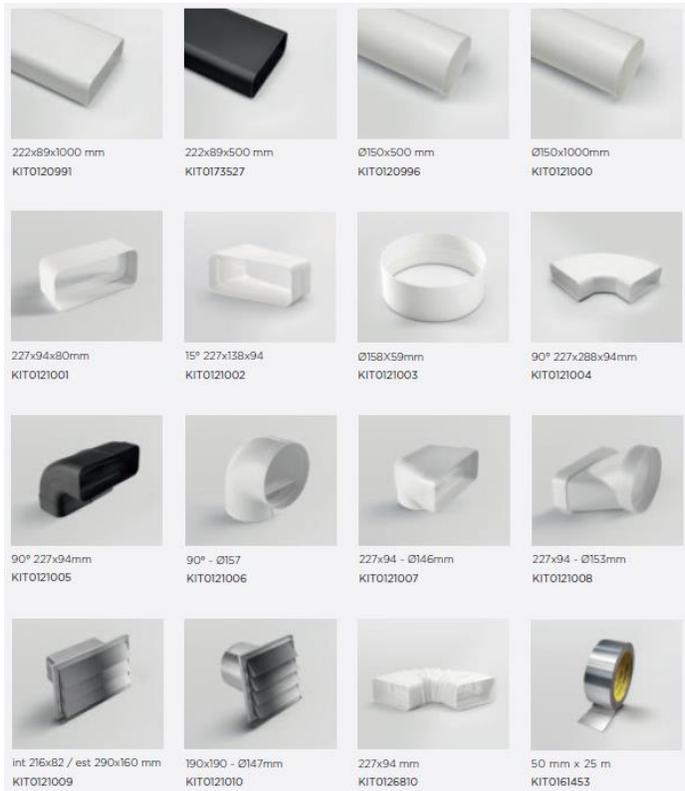

Filtering version

No pipes included in the packaging

pipes for installation as accessory

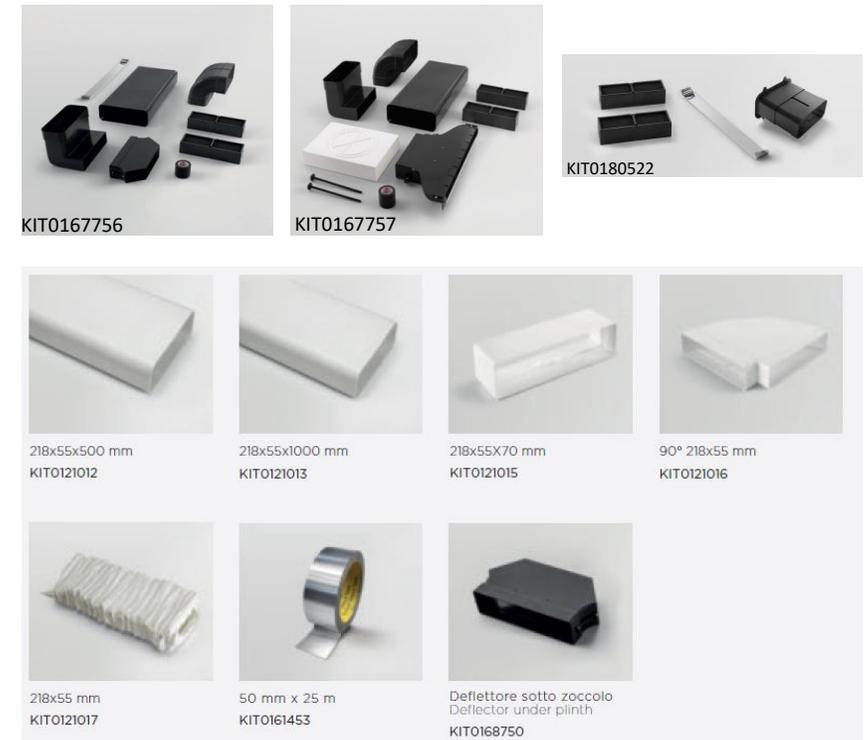

Odour filter



KIT0167755

HP regenerable ceramic filter

Efficiency 80%

Regenerable every 2-3 months in the oven for 45 min. at 200°

Installation box



KIT0167756

Filtering kit plinth in



KIT0167757

Filtering kit plinth out



KIT0180522

Filtering kit back outlet