


Elibloc 9

CLASSIC / CANOPY / INTEGRATED

51

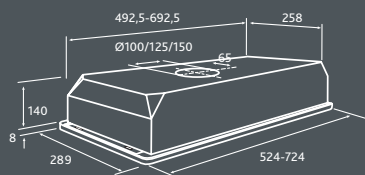

Elibloc 9	Finish	Grey
	Controls	3 speed slider controls
	Lights	2 x 40w hob lamps
	Grease filter	Metal washable grease filters
	Ducting connector	100mm (4in) diameter (St) 125mm (5in) diameter (Lx)
	Available widths	520mm or 720mm
	Maximum airflow	270 m ³ /h (St) 480 m ³ /h (Lx)
	IEC airflow	250 m ³ /h (St) 440 m ³ /h (Lx)
	Noise level	53-65 dB(A) (St) 54-69 dB(A) (Lx)
	Power consumption	200w (St) 320w (Lx)
	Charcoal Filter	F00189/1S

Elibloc 9 remote	Finish	Grey
	Controls	Variable speed slider control
	Lights	2 x 20w halogen lamps
	Grease filter	Metal washable grease filters
	Ducting connector	150mm (6in) diameter ducting connector
	Available widths	520mm or 720mm
	Maximum airflow	1200 m ³ /h
	IEC airflow	850 m ³ /h
	Noise level	31-51 dB(A)
	Power consumption	240w
	Charcoal Filter	NA

Description	Code
ELIBLOC 9 - 60 1M GR	ELIBLOC 9 ST GR/F/60 175555/2
ELIBLOC 9 - 60 2M GR	ELIBLOC 9 LX GR/F/60 1745563/2
ELIBLOC 9 - 80 2M GR	ELIBLOC 9 LX GR/F/80 1745564/2
ELIBLOC 9 - GME 60 GR	ELIBLOC 9 RM GR/A/60 27512771
ELIBLOC 9 - GME 80 GR	ELIBLOC 9 RM GR/A/80 27512772