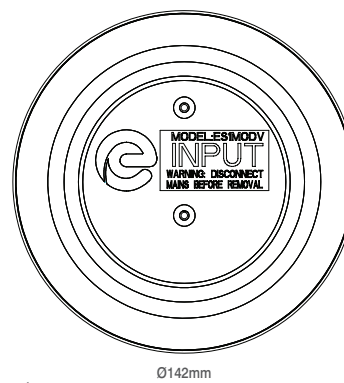


Product Code: ES1MODV

Description: Hardwired Interconnect Input Module


General Information

Dimensions (mm)	Ø142 x 36.5
Colour	White
Materials	UL94-V0 rated UV stabilised ABS
Mounting	Ceiling or Wall
Weight (Kg)	0.168
Warranty (Years)	5

Supply, Power & Backup

Supply Type	Mains AC with battery backup
Supply Voltage (V AC)	230
Frequency (Hz)	50
Cable Size (mm ²)	0.75 – 2.5
Relay/Contact Type	Volt-free Normally Open Short to trigger
Maximum Power Consumption (W)	0.5
Standby Power Consumption (W)	0.2
Battery Backup	Non-replaceable Rechargeable
Battery Type	3V Lithium (x2)
Battery Size	VL2330
Battery Chemistry	Lithium

Interconnectability

Wired Interconnect Supported	Yes
Maximum Interconnect Wiring Distance (m)	300
RF-LINK Supported	No
Maximum Supported Wired & RF-LINK Interconnected Devices	28

Environment

Operating Temperature (°C)	0 to +40
Relative Humidity Resistance (%)	95 (non-condensing)

Compatible Products Interconnect supported Espire Products

Features

Enables 3rd party devices to trigger the alarm function of Espire alarms