

Features:

- ◆ Maintenance-free operation
- ◆ Stable quality and high reliability
- ◆ Compact design
- ◆ 5 years design time (at 25°C)



Applications

- ◆ UPS
- ◆ Emergency lighting
- ◆ Fire alarm and security systems
- ◆ Telecommunication system
- ◆ Backup power for testing and measuring instruments
- ◆ Alarm and security system
- ◆ Electronic apparatus and equipment
- ◆ Communication power supply
- ◆ DC power supply
- ◆ Auto control system

Specifications

Nominal Voltage	12V(6cells)
Nominal Capacity	3.3AH (20hr,1.75V/cell,25°C/77°F) 2.8 AH (5hr,1.75V/cell,25°C/77°F) 1.98AH(1hr,1.60V/cell,25°C/77°F)
Dimension	Length 134 ±1mm
	Width 67±1mm
	Container Height 60 ±2mm
	Total Height(with Terminal) 65±2mm
Weight	1220G ± 3%
Terminal	F1
Container Material	ABS UL94 V0
Max.Discharge Current	47 A(5S)
Internal Resistance	Approx 65mΩ

Operating Temp Range	Discharge: -15—50°C(5—122°F) Charge : 0—40°C(32—104°F) Storage : -15—40°C(5—104°F)
Nominal Operating Temp. Range	25±3°C(77±5°F)
Cycle Use	14.4~14.8V(25°C/77°F)Temp.Coefficient-30mV/°C Initial Charging Current Less than 0.99A
Standby Use	13.5V~13.8V(25°C/77°F)Temp.Coefficient-20mV/°C No limit on Initial Charging Current
Capacity affected by Temperature	40°C(104°F) 103%
	25°C(77°F) 100%
	0°C(32°F) 86%
Self Discharge	CASIL CA series batteries may be stored for up to 6months at 25°C(77°F)and then a freshening charge is required. For higher temperatures the time interval will be shorter.

Constant Current Discharge (Amperes at 25°C / 77 °F)



F.V/Time	5min	10min	15min	30min	45min	1h	3h	4h	5h	6h	8h	10h	20h
1.60V	10.6	8.3	5.6	3.10	2.64	1.98	0.89	0.69	0.60	0.53	0.46	0.32	0.18
1.67V	10.3	8.0	5.5	3.02	2.57	1.93	0.87	0.68	0.59	0.52	0.45	0.31	0.17
1.70V	10.0	7.8	5.3	2.95	2.51	1.88	0.85	0.68	0.58	0.51	0.44	0.30	0.17
1.75V	9.8	7.6	5.2	2.88	2.45	1.84	0.83	0.66	0.56	0.50	0.43	0.30	0.17
1.80V	9.5	7.5	5.1	2.80	2.39	1.79	0.80	0.64	0.55	0.48	0.42	0.29	0.16

Constant Power Discharge (Watts per cell at 25°C / 77 °F)


F.V/Time	5min	10min	15min	30min	45min	1h	3h	4h	5h	6h	8h	10h	20h
1.60V	20.1	16.1	10.9	6.2	5.3	4.0	1.80	1.40	1.24	1.09	0.95	0.66	0.36
1.67V	19.6	15.7	10.7	6.0	5.1	3.9	1.76	1.39	1.21	1.07	0.92	0.64	0.36
1.70V	19.1	15.3	10.4	5.9	5.0	3.8	1.72	1.37	1.18	1.04	0.90	0.62	0.35
1.75V	18.6	14.9	10.1	5.8	4.9	3.7	1.67	1.34	1.15	1.01	0.88	0.61	0.34
1.80V	18.1	14.5	9.9	5.6	4.8	3.6	1.63	1.31	1.12	0.99	0.86	0.59	0.33

Note: The above characteristics data are average values obtained within three charge/discharge cycles, not the minimum values.


Dimensions
Unit:mm [Inches]

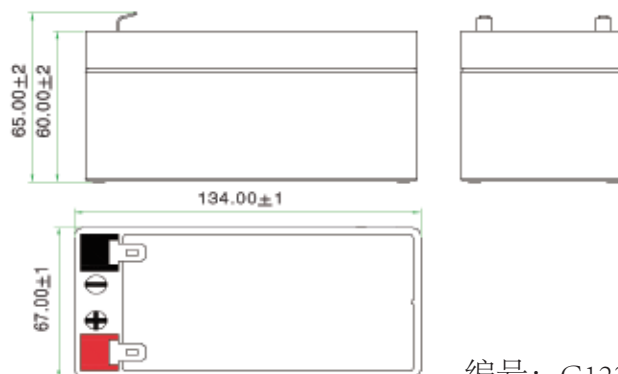


Storage characteristics

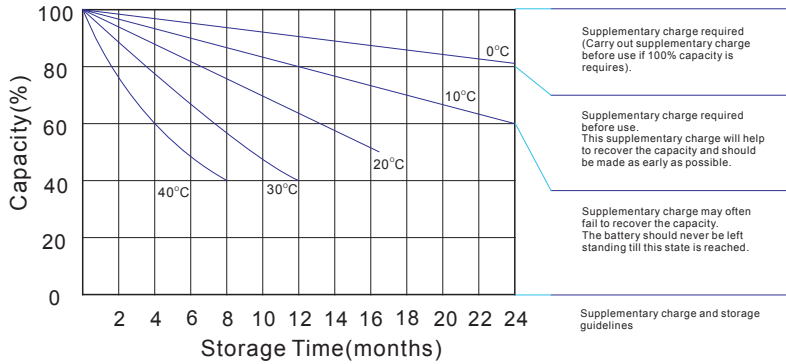


Effect of temperature on long term float life

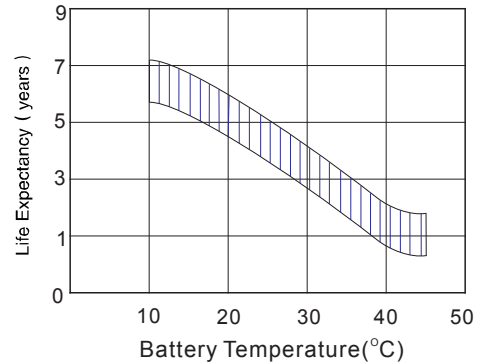


Charge characteristic Curve for standby use

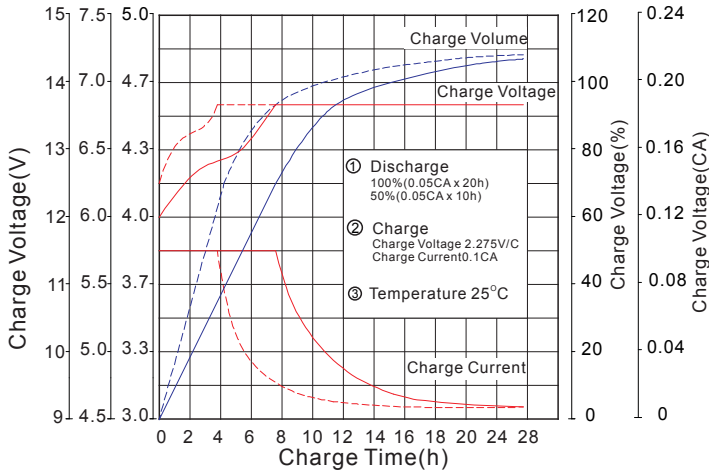


Cycle Life in Relation to Depth of Discharge

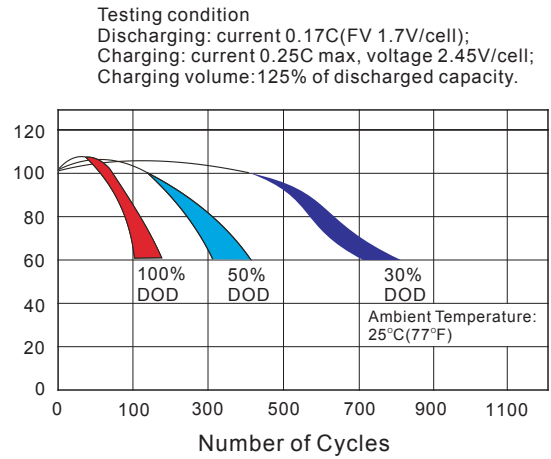

Discharge characteristic Curve

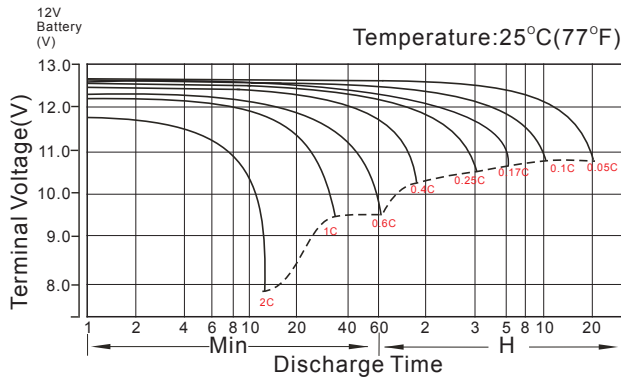

Temperature Effects in Relation to Battery Capacity

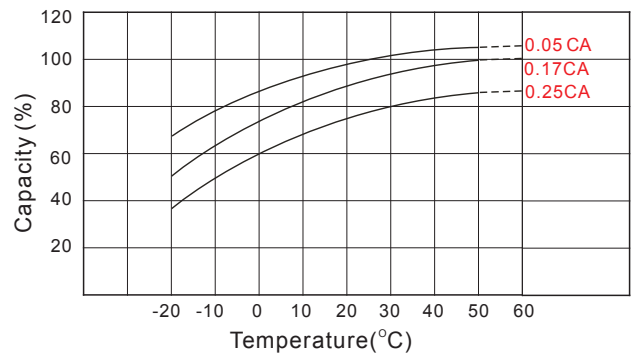

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice.