

Technical Data Sheet:	DS065/0512
Product Description	FPL Contractor Pack: 10 metres of UPVC pliable Conduit with 10x Nylon Flexilok fittings and locknuts.
Product Range	FPL - Pliable Conduit Contractor Pack

FLEXICON

FLEXIBLE CONDUIT SOLUTIONS

Roman Way, Coleshill
Birmingham
B46 1HG
Tel: 00 44 (0)1675 466900
Website: www.flexicon.uk.com




Size	Part No.
20mm	FPL-CP20W
25mm	FPL-CP25W

FPL Contractor Pack

- 10 Metres of FPL corrugated UPVC Pliable Conduit
- 10 Nylon Flexilok fittings
- 10 Nylon locknuts



FPL Conduit with Flexilok fitting

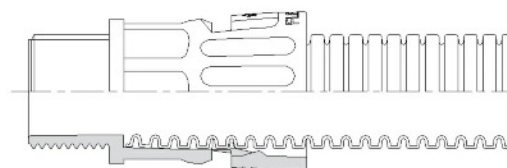


Conduit



Size	Dimensions and Mechanical Properties			
	Reel Length (M)	OD (mm)	ID (mm)	Min Bend radius R (mm)
20	100	20.0	15	30
25	50	25.0	19.5	40



Fitting

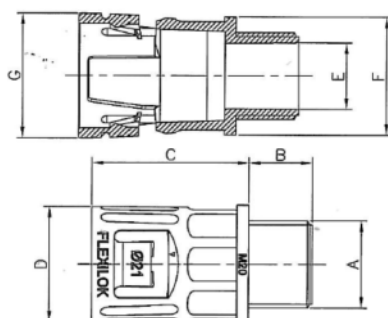

Size	Nominal Dimensions (mm)					
	B	C	D	E*	F	G
20	14	34	25	14.5	25	28
25	15	37	30	19.5	30	33

Material:

Conduit:
UPVC

Fittings:
Nylon (PA66)

Colour:
White

Fire Performance:

Self extinguishing

IP Rating:

- IP66

Applications

- Buildings, particularly where buried in concrete or plaster.
- Pliable conduit for static applications.
- Fast fit flexilok fittings.
- Nylon locknuts included

Temperature Performance:

-5°C to +70°C

Compliance, Approvals & Accreditation;



IEC EN 61386

EN 61386 Classification Available on request

Typical Applications;



Construction

Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.

Created by; Colin Legg - Marketing Manager	Approved by; Ian Gibson - Technical Director	Date; May 2012	Page Number; Page 1 of 1
--	--	--------------------------	------------------------------------