



Available finish:- Grey

Read these instructions before commencing installation & retain them for future reference.

IP65 **240V 12W**

These fittings are Class II and do not require an earth

Important Information




It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control. These products are designed for connection to a 240V 50Hz supply. Any damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a sub-standard installation.

Important User Advice

Always switch off mains supply before servicing.

Installation Procedure

- KSR recommend that you familiarize yourself with the connections.
- Turn off the mains supply.
- Remove the grey trim by unclipping. Unscrew the 4 diffuser screws and remove the diffuser.
- Fix the base to wall using suitable fixings.
- Connect supply leads with terminal block: Brown (L), Blue (N).
- Refit the diffuser ensuring all seals are intact, not damaged and the diffuser is seated correctly.
- Refit the grey trim or fit one of the optional trims.
- Turn on mains supply and test.

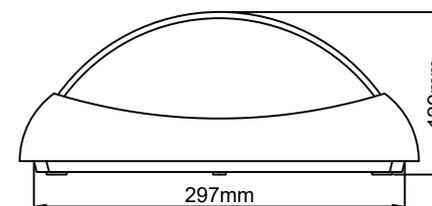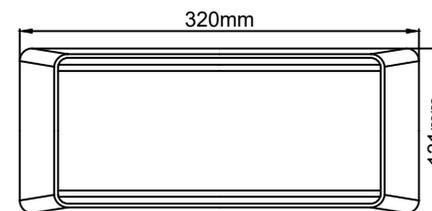

KSR1520

Optional Trims:



**KSR1521
Louvre**



**KSR1522
Up & Down**



**KSR1523
Eyelid**

Lamp Details

Wattage: 12W
Colour: 4000K
CRI: Ra84
Lumens:
 KSR1520 - 940 Lumens
 KSR1521 - 668 Lumens
 KSR1522 - 335 Lumens
 KSR1523 - 720 Lumens



KSR Lighting Aftersales: 023 92 674343
 E-mail: aftersales@ksrlighting.com