

Navara Pro Select & 3CCT LED Batten

Commercial Lighting



Data Sheet

Product Information

The **Newly Improved** Navara Pro Multi-Wattage & CCT LED battens are a simple and cost-effective solution for a wide range of Commercial and Retail applications. 4 selectable wattages & 3CCT within each fitting, **Push wire terminals** for plug and play installation and **now complete** with a **hinged diffuser** making it easier and therefore quicker to install saving time for the installer.

New Hinged Top & LED's



Product Features

- 5-year warranty
- Class I
- IP20
- IK06
- Range of Sizes & Wattage Selectable up to 65W LED
- Selectable CCT – 3000K, 4000K or 6000K
- Up to 7360 Lumens
- High efficiency – up to 122lm per Circuit Watt
- CRI: >Ra80
- 120° beam angle
- Instant on
- Emergency options available
- Dimming options available on request
- Lighting designers can download photometric data from our website
- L70 – 54,000hrs

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Total Lumens (lm) / Lumens per Circuit Watt	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR98190	Navara Pro X4 Select 4ft 21W, 27W, 32W or 38W LED 3CCT Batten	21W	3000K	2475lm / 117lm	>80	E	I
			4000K	2535lm / 120lm			
			6000K	2520lm / 120lm			
		27W	3000K	3065lm / 113lm	>80	E	I
			4000K	3110lm / 115lm			
			6000K	3090lm / 114lm			
		32W	3000K	3565lm / 111lm	>80	E	I
			4000K	3635lm / 113lm			
			6000K	3590lm / 112lm			
		38W	3000K	4090lm / 107lm	>80	E	I
			4000K	4200lm / 110lm			
			6000K	4185lm / 110lm			
KSR98192	Navara Pro X5 Select 5ft 30/58w LED CCT Batten	32W	3000K	3725lm / 116lm	>80	E	I
			4000K	3825lm / 119lm			
			6000K	3780lm / 120lm			
		41W	3000K	4770lm / 116lm	>80	E	I
			4000K	4985lm / 121lm			
			6000K	4885lm / 119lm			
		50W	3000K	5820lm / 116lm	>80	E	I
			4000K	6035lm / 120lm			
			6000K	5975lm / 119lm			
		58W	3000K	6760lm / 116lm	>80	E	I
			4000K	7100lm / 122lm			
			6000K	6890lm / 118lm			
KSR98194	Navara Pro X6 Select 6ft 40/65w LED CCT Batten	36W	3000K	4130lm / 114lm	>80	E	I
			4000K	4230lm / 117lm			
			6000K	4105lm / 114lm			
		46W	3000K	5270lm / 114lm	>80	E	I
			4000K	5320lm / 115lm			
			6000K	5295lm / 115lm			
		55W	3000K	6400lm / 116lm	>80	E	I
			4000K	6480lm / 117lm			
			6000K	6450lm / 117lm			
		65W	3000K	7260lm / 111lm	>80	E	I
			4000K	7360lm / 113lm			
			6000K	7320lm / 112lm			

*For emergency options add EM after the part number

*Dimmable Options available on Request


Technical Data	Navara X4	Navara X5	Navara X6
Nominal voltage	200~240VAC	200~240VAC	200~240VAC
Operating frequency	50-60Hz	50-60Hz	50-60Hz
Circuit Wattage	19.6w including driver losses	29.3w including driver losses	37.1w including driver losses
	34w including driver losses	54.3w including driver losses	60w including driver losses
Circuit Current	0.153	0.227	0.245
Driver Current Rating	750mA	1100mA	1160mA
PFC	0.96	0.98	0.98
In Rush Current	3.32A Max Peak	4.5A Max Peak	4.5A Max Peak
Start Time	< 0.5 Sec	< 0.5 Sec	< 0.5 Sec
Ambient temperature range	-5°c to +40°c	-5°c to +40°c	-5°c to +40°c
IP rating	20	20	20

Construction



Body:	Powder Coated Mild Steel
Diffuser:	Opal Polycarbonate
End Caps:	PMMA

Product Dimensions



KSR98190

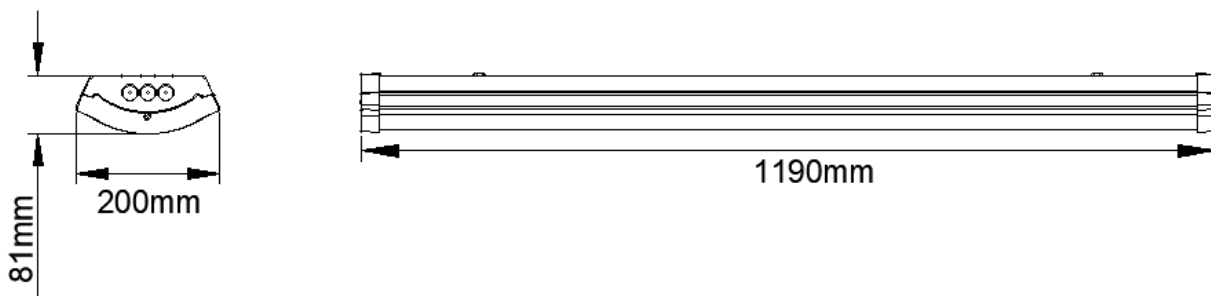

KSR98192

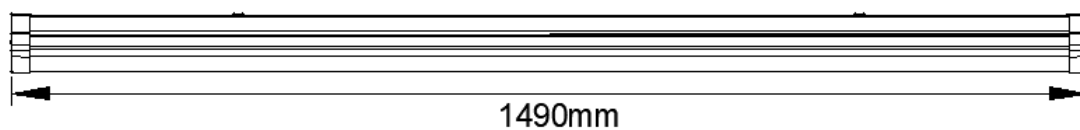

KSR98194

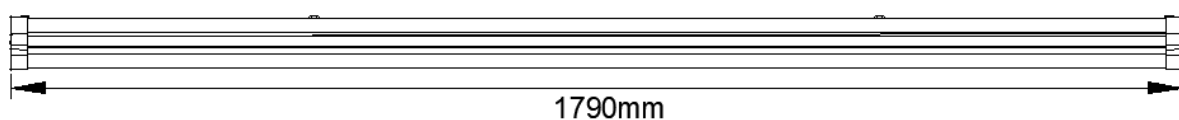

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.