

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.


## UK CE Norte LED Streetlight Spigot Reducer

### Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current wiring regulations & local building control. Any faulty, broken or damaged parts should be replaced immediately. General maintenance and cleaning should be performed at least quarterly. Clean product outer using a damp cloth,. Protection from exposure to natural elements in the form of a non-abrasive water repellent protection (car wax). Grease screws and nuts with a suitable waterproof repellent will ensure the product gives you a long lasting trouble free life/finish.


Available finish:- Anthracite Only

**Side View - Can be Post top mounted or Flag Pole mounted.**

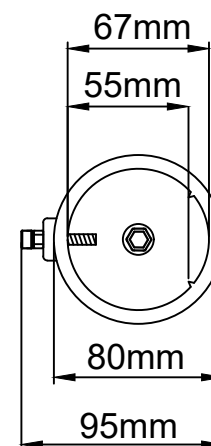


**End View of fitting Aperture.**

**KSR99116**

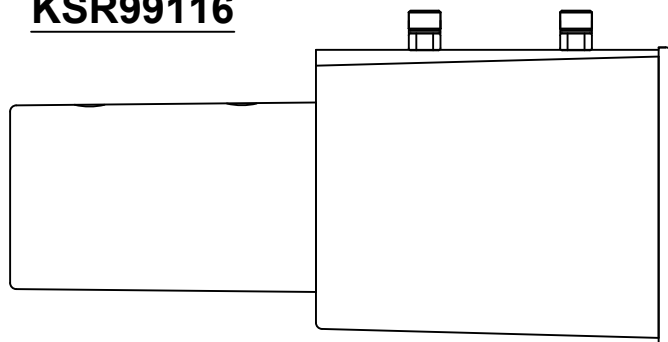


**Max pole diameter to insert into the fitting aperture - KSR99110 & KSR99111 would be Ø60mm - Accessory KSR99116 reducing spigot to fit a Ø76mm - Pole - Tighten to 16NM**

**KSR99116**

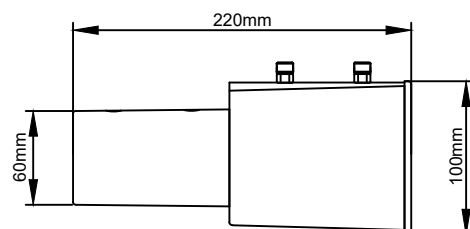

**Below View.**

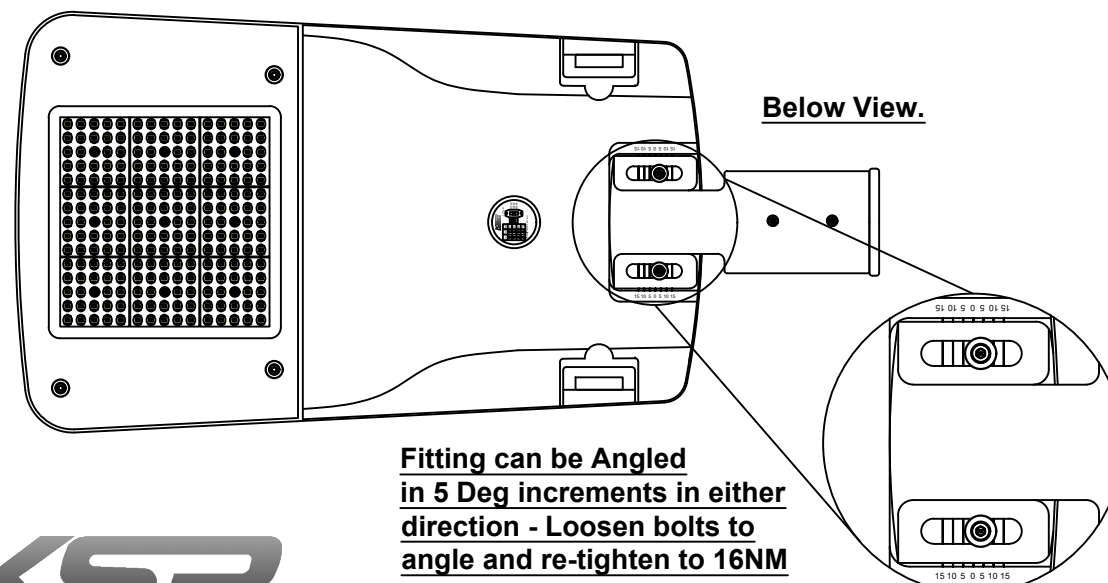

**Fitting can be Angled in 5 Deg increments in either direction - Loosen bolts to angle and re-tighten to 16NM**

