

Roma Mini Select

Commercial Lighting



Data Sheet

Product Information

The **Roma Mini Select** surface fittings are the ultimate bulkhead solution with its small diameter and shallow depth. As standard, fittings are triple CCT & Dual Wattage Selectable 8W or 12W Output & Selectable CCT 3000K, 4000K or 6000K

Now available in integral Emergency & Microwave Emergency, the 4 versions cover most bulkhead scenarios.



Product Features

- 5-year warranty
- Class II
- IP65
- IK10
- Selectable Wattage 8W or 12W LED
- Selectable Colour Temperature 3000K, 4000K or 6000K
- CRI: Ra>89
- Up to 107 lumens per circuit Watt
- Wall or ceiling mountable
- Microwave version available
- Emergency version available
- Microwave & Emergency version available
- Suitable for BESA Box mounting
- L70 - 40,000hrs

Product Specification

Product Code	Product Description
KSRSF407	Roma Mini Select LED Multi Wattage Triple CCT Surface Fitting
KSRSF408	Roma Mini Select LED Multi Wattage Triple CCT Surface Fitting with Integral Microwave
KSRSF409	Roma Mini Select LED Multi Wattage Triple CCT Surface Fitting with Integral Emergency
KSRSF410	Roma Mini Select LED Multi Wattage Triple CCT Surface Fitting with Integral Microwave & Emergency

Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class 2021	Protection Class
8	3000	760	86	F	II
	4000	820	89		
	6000	790	84		
12	3000	1050	86	F	II
	4000K	1155	89		
	6000K	1080	84		
EM Mode	4000K	147			

Technical Data


	8W Output	12W Output
Nominal voltage	220~240VAC	220~240VAC
Operating frequency	50-60Hz	50-60Hz
Circuit Wattage	7.7w including driver losses	11.3w including driver losses
Circuit Current	TBC	TBC
Driver mA Rating	175mA	175mA
PFC	0.7	0.9
In Rush Current	TBC	TBC
Ambient temperature range	0°C~+35°C	0°C~+35°C
Start time	< 0.5 sec	< 0.5 sec
IK rating	10	10
IP rating	65	65

Construction


Body: Polycarbonate
 Diffuser: Polycarbonate
 Rim: ABS

Product Dimensions

KSRSF407 - KSRSF410

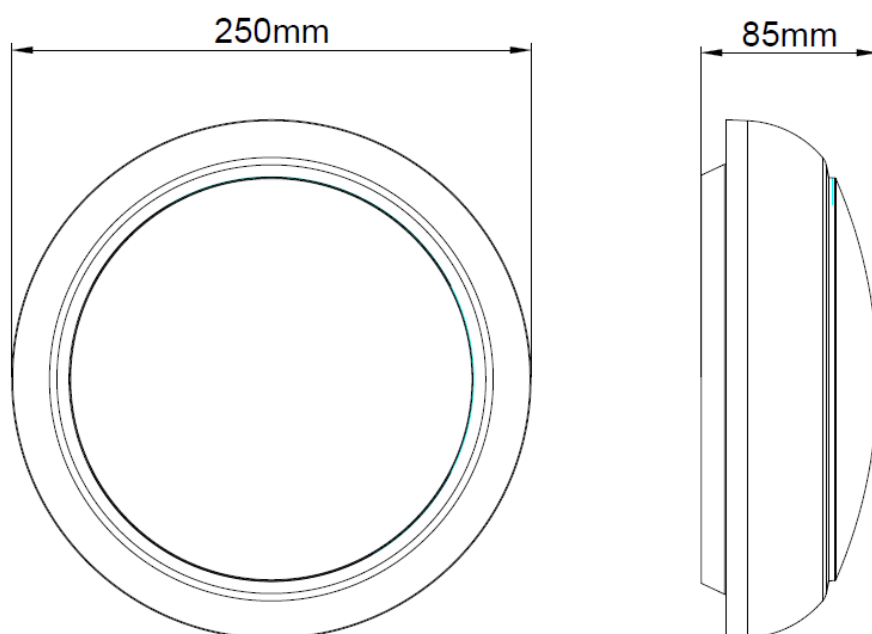

Base Fixing Details

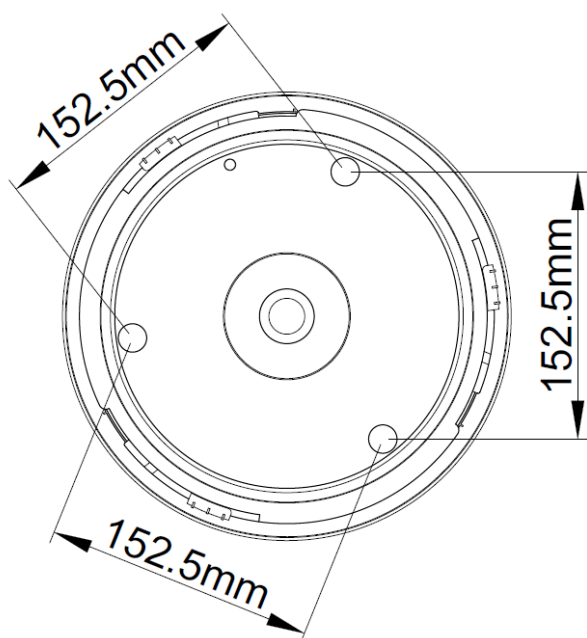

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.