

NEW

MAINS-POWERED SMOKE & HEAT ALARM FAMILY

with slide-on Quick-Fit Base for faster, cleaner installations.




BASE PLATE DESIGNED TO ENABLE RETROFIT

Flared base plate allows neat retrofit, even of larger alarms.



INTEGRATED CABLE-MANAGEMENT

Built-in terminal block for quick and secure installation.

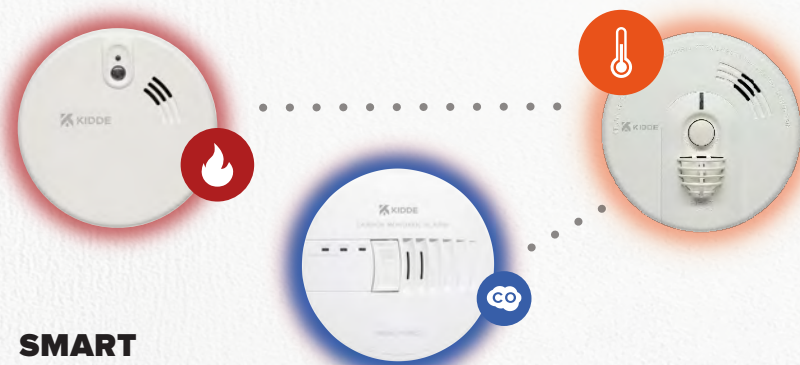

SMART INTERCONNECT

When one alarm is activated by smoke, heat or carbon monoxide, all other alarms are triggered.

The Kidde K4MCO CO alarm pictured above is fully compatible with these new alarms.



Contact your Kidde Sales Representative



03337 722 227

www.uk.kidde.com

*Images are representative only. Actual product may vary slightly.




KM 738872
EN 14604:2005+AC:2008



KM 738879
BS 5446-2:2003



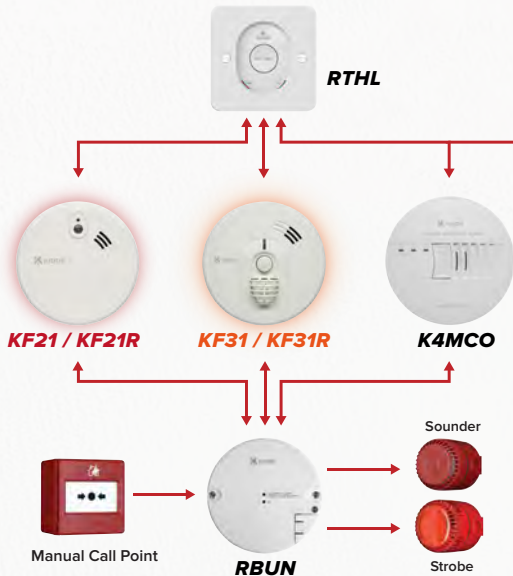

EXTENDED FAMILY OF HARD-WIRED CONNECTED OPTIONS

SPECIFICATION



SENSOR TYPE	Optical smoke	Optical smoke	Thermistor	Thermistor
PRIMARY POWER SUPPLY	230V AC, 50Hz			
GRADE	D2	D1	D2	D1
BATTERY BACK-UP	9V Alkaline	Rechargeable lithium	9V Alkaline	Rechargeable lithium
MOUNTING OPTIONS	Ceiling or wall mounting			
OPERATING TEMPERATURE RANGE	-10 °C to 40 °C			
HUMIDITY RANGE	Up to 93% RH (non-condensing)			
STORAGE AND TRANSPORT	-20 °C to 60 °C, 5% to 95% RH (non-condensing)			
AUTOMATIC SELFTEST	Circuitry is tested and unit chirps if fault is detected			
CONNECTION	Wired Quick-Fit Installation Base			
ALARM SOUNDER	Piezoelectric sounder (T3 pattern sound: three pulses - space - three pulses), soldered contacts			
SOUND OUTPUT	85dB (A) minimum at 3 metres			
ALARM FREQUENCY	3.2 kHz typical			
FIXING	Quick-Fit base features multiple fixing positions, including two 'T' slots with 57mm to 90mm screw spacing			
ALARM DIMENSIONS (INCLUDING BASE)	150mm x 53mm	150mm x 53mm	150mm x 66mm	150mm x 66mm
ALARM WEIGHT (INCLUDING BATTERY)	295g	260g	281g	245g
CASE QUANTITY	6 units			
MANUFACTURER'S WARRANTY	10-years			