

Adhesive Hazard Warning Tape

With Pressure Sensitive Adhesive




Materials:

- PVC film coated with rubber pressure sensitive adhesive.

Features:

- Ideal for marking floors, walls and overhead.
- Flexible.
- Good water and abrasion resistance.

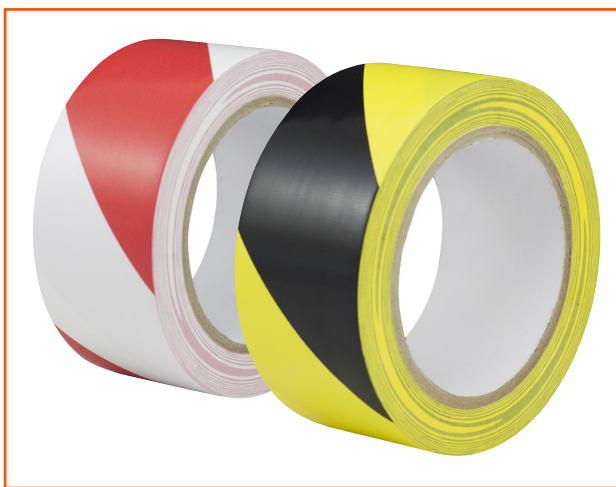

Technical Data

Property	Value
Total Thickness	0.15mm (±0.01)
Elongation	150%
Adhesive	Rubber resin
Tensile Strength	≥ 16 N/cm
Adhesive to Steel	≥ 1 N/cm
Roll Back Tack	> 10 (ball no.)
Voltage Resistance	≥ 3 kV
Temperature Rating	-15°C to +80°C

Item No.	Colour		W (mm)	L (m)	Thickness (mm)
	Black	Yellow			
HT50X33M-B/Y	Black	Yellow	50	33	0.15
HT50X33M-R/W	Red	White	50	33	0.15

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. KrimpTerm cannot be held responsible for product failure unless full testing has been carried out. The user has to decide on the tapes suitability for their own applications.