

# LED LITE™ 3.5W IP65 Emergency Bulkhead

## Energy Saving LED

## EMLED




The 3.5W Emergency Bulkhead is an IP65 rated and has a polycarbonate base, a combined diffuser gear tray with quick release restraints and loop-in/loop-out terminals to allow quick and easy installation.

### Applications:

- Corridors
- Exits
- Escape routes
- Stairwells
- Final exit doors

### Dimensions:

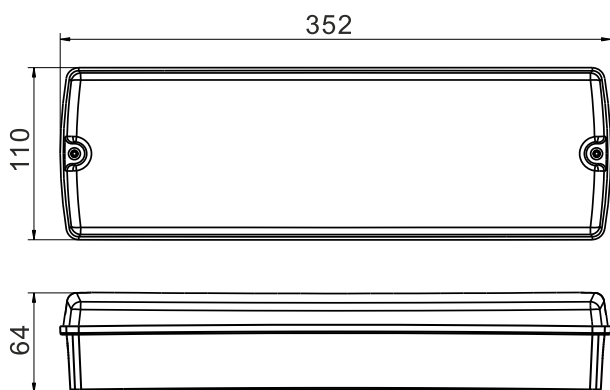

### Specifications:

- Input Voltage: 220-240V/AC 50/60Hz
- Rated Power: 3.5W
- Power factor: 0.4
- Power Consumption (Maintained): 3.1W(charging)  
3.5W(ful charged)
- Power Consumption (Non-Maintained):  
1.9W(charging)  
0.5W(full charged)
- LED Type: 2835/41pcs SMD LED
- Light Output: 350lm AC Mains / 200lm DC Battery
- Battery Type: Li-FePO4 18650 3.2V 1500mAh
- Charging Time: 24 hours
- Discharge Time: more than 3 hours
- Colour Temperature: 6500K
- Deep Discharge Protection Voltage: 3V
- Overcharge Protection Voltage: 3.6V
- Operating Temperature Range: 0 ~ 400C
- Operating Relative Humidity: less than 90%
- Dimensions: 352mm x 110mm x 64mm
- Weight: 491g
- IP Rating: IP65
- Safety Classification: Class I
- Warranty: 2 years

