

LTWPT30CCT

Texas Multi Wattage LED Wall Pack

Designed with both flexibility and durability in mind, the Texas wall pack features selectable wattage options of 18W, 22W, 26W, or 30W, along with switchable colour temperature to suit a wide variety of indoor and outdoor applications. With an output of up to 3000 lumens, it delivers bright, efficient illumination while maintaining excellent energy performance. The robust polycarbonate base and diffuser provide IK10 impact resistance and IP65 weather protection, ensuring dependable operation in demanding environments. BESA box compatibility and rear and side cable entries allow for quick and flexible installation.


Applications: corridors, stairwells, commercial units, car parks, and general communal areas.



Features & Benefits:

- CCT Changeable
- Power Selectable: 18W / 22W / 26W / 30W
- Lumens Output: Up to 3000 lm
- IP65 / IK10 Rated – weatherproof and impact resistant
- BESA Box Compatible
- Back & Two Side Conduit Cable Entries
- PC Body & Diffuser
- Clip-on Black Trim Bezel Included
- Quick Plug-in Screwless Accessories Available: Emergency Kit (LTEM)
Photocell Sensor (LTWPPC)

Dimensions:

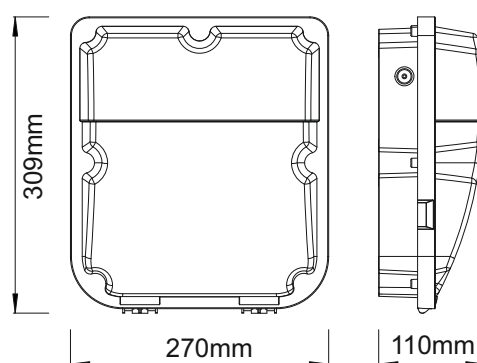

Technical Specifications:

| | | | |
|---|--------------------|-------------------------|------------------|
| Input Voltage: | AC220-240V 50/60Hz | Efficacy (lm/W): | 100lm/W |
| Power (W): | 18W/22W/26W/30W | IP Rating: | IP65 |
| DF: | >0.7 | IK Rating: | IK10 |
| LED Type: | SMD2835 | Body Material: | High-Strength PC |
| Light Output L₁₀₀ (lm): | up to 3000lm | Working Temp.: | -15°C ~ +40°C |
| CCT L₁₀₀ (K): | 3000K/4000K/6500K | LxWxH(mm): | 309x270x110 |
| CRI L₁₀₀: | >80 | Warranty: | 5 Years |



220-240V/AC