

**LED LITE™**  
Energy Saving LED



**LTMOD5CCT**

**5ft Surface Modular LED Batten**  
**CCT Changeable & Power Adjustable 34/43/52/60W**

The LTMOD5CCT 5ft Surface Mounted LED Batten Fitting is a sleek and energy-efficient lighting solution designed for commercial, educational, and industrial spaces. Combining flexibility with cutting-edge technology, this fitting delivers exceptional performance tailored to your needs:

• **CCT Changeable:**

Easily adjust the colour temperature from warm white to cool daylight (3000K to 6500K) to create the perfect ambiance for any environment.

• **Four Power Adjustable Settings:**


Optimize energy use and brightness with selectable wattage options, providing maximum adaptability for diverse lighting requirements.

• **Compatibility with LTWPLED Emergency Kit and LTWPMW Microwave Sensor (Sold Separately):**

Enhance functionality by adding a modular quick plug-in emergency kit for uninterrupted illumination during power outages or a motion and daylight sensor for energy-saving automation.

Designed with durability and convenience in mind, this versatile LED batten fitting is ideal for schools, offices, and industrial settings. Its long lifespan and low maintenance needs make it a cost-effective and reliable lighting solution for modern spaces.



**Dimensions(mm):**

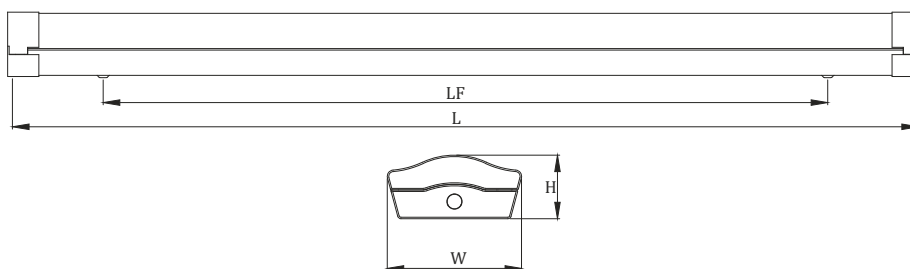


Product Code	L(mm)	W(mm)	H(mm)	LF(mm)
LTMOD5CCT	1505	180	85	1220

**Technical Specifications:**

<b>Input Voltage:</b>	220-240 V/AC, 50-60Hz	<b>Safety Class:</b>	Class I
<b>Input Current:</b>	0.35A	<b>IP Rating:</b>	IP20
<b>Power:</b>	34/43/52/60W	<b>Installation:</b>	Surface Mounting/Hanging
<b>Efficiency(lm/W):</b>	130lm/W	<b>Housing:</b>	Steel Body
<b>Lumen Output:</b>	4420/5590/6760/7800lm		PC Milky Diffuser
<b>CCT Changeable:</b>	3000/4000/6500K	<b>Operating Temp.:</b>	-20°C to +40°C
<b>CRI:</b>	>80	<b>Storage temp.:</b>	-20°C to +80°C
<b>Beam Angle:</b>	120°	<b>Dimmable:</b>	No
<b>Power Factor:</b>	>0.9	<b>Warranty:</b>	5 years



Non-replaceable control gear




### Plug & Play Emergency Pack and Microwave Sensor

Standard fittings can be easily transformed into emergency or sensor fittings with the help of the plug & play emergency pack and microwave sensor (sold separately).

Power				CCT			
PIN1	PIN2	OUTPUT		IN1	PIN2	CCT	
ON	ON	60W		ON	ON	4000K	
OFF	ON	52W		ON	OFF	6500K	
ON	OFF	43W		OFF	ON	3000K	
OFF	OFF	34W					
ON				ON			
1 2				1 2			


### CCT Changeable and Power Adjustable

The LTMOD5CCT fittings are 3 x CCT changeable and 4 x Power adjustable for multiple installation options. The driver comes with easily accessible DIP switches for CCT & Power control.



### Easy to Open & Secure Design

The diffuser can be easily opened by pushing the lock button upwards. The lock button can be secured into place using the included screw.



### Multiple Installation Methods

The fittings come with accessories for surface mounting and suspension mounting (cable not included).