



LTSP60CCT


60W LED Super Slim Back Panel Light 3CCT c/w Driver

The 60W Super Slim LED Backlit Panel Light is engineered to provide uniform, glare-controlled lighting for commercial and professional environments. Designed with a TP(a) diffuser and a low UGR<19 rating, it ensures compliance with workplace lighting standards while enhancing visual comfort. Its 3CCT (3000K/4000K/6000K) switch offers flexible colour temperature options to suit different applications and preferences. The backlit design provides even light distribution without dark spots, while the ultra-slim housing allows for easy integration into standard grid ceiling systems.

Features & Benefits:


- Super Slim Design – Sleek, ultra-thin profile for modern spaces
- Backlit Technology – Uniform, efficient, and long-lasting light
- Complete with LEDlite Non-Dimmable External Driver
- TP(a) Rated Diffuser
- UGR<19 – Low glare for eye comfort in work environments
- 3CCT selectable – adjustable light colour (3000K / 4000K / 6000K)
- High Efficiency: 120lm/W

Dimensions:

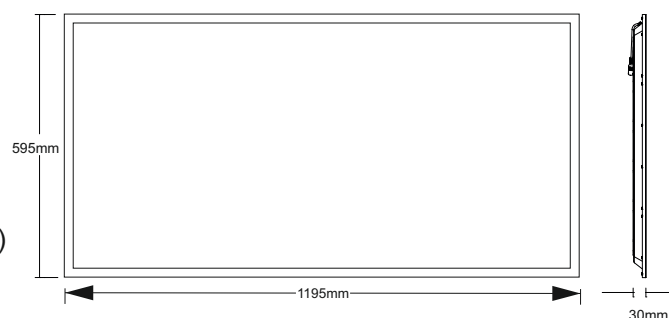

3 CCT Changeable Function

The panel light CCT adjustment is made from the switch mounted in line between the driver & panel. To change the colour temperature move the switch to the desired CCT position. Switch off power supply while changing the colour temperature in order to avoid any damage to the panel light or the driver.

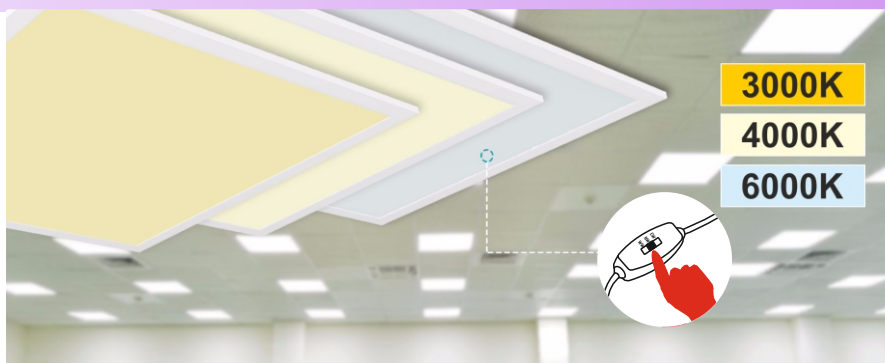

Technical Specifications:

Input Voltage:	220-240 V/AC	Beam Angle:	120°
Wattage:	60W	Power Factor:	>0.95
Lumen Output:	7200lm	CRI (Ra):	>80
CCT Changeable:	3000/4000/6000K	IP Rating:	IP20
Diffuser:	TP(a) Rated	Working Temp.:	-20°C ~ +45°C
UGR Rating:	UGR<19	Storage Temp.:	-25°C ~ +65°C
LED:	2835SMD Epistar	Warranty:	3 years
Driver:	Non-Dimmable Flicker-Free	Dimensions:	1195 x 595 x 30 mm

220-240V

