LED LITE™

Energy Saving LED

# LTSS10/20/30CCT LED Surface Mounted Spot Light CCT Changeable

Our new CCT selectable LED surface-mounted spotlight offers a simple and flexible lighting solution for both homes and commercial spaces. With the option to switch between warm, neutral, and cool white light (3000K / 4000K / 5000K), it's easy to create the right atmosphere for any setting. Its neat surface-mounted design makes it perfect for installations where recessed fittings aren't suitable, while still maintaining a clean, modern look. Built with a durable housing for reliable heat management and using high-efficiency LED technology, the spotlight delivers bright, even illumination with low energy consumption and a long service life.

## Applications:

Shopping malls, cultural exhibition halls, chain stores, business halls, professional windows, counters and other key lighting places.

## Features:

- CCT Selectable
- Surface-Mounted Design
- High-Efficiency LED Performance
- Wide Beam Angle & Low Glare

## Specifications:

| | LTSS10 | LTSS20 | LTSS30 |
|---|---|---|---|
| **Voltage:** | 200-260V/AC 50/60Hz | 200-260V/AC 50/60Hz | 200-260V/AC 50/60Hz |
| **Power:** | 10W | 20W | 30W |
| **Lumen Output:** | 700-800Lm | 1600-1800Lm | 2400-2800Lm |
| **CRI:** | >80 | >80 | >80 |
| **CCT:** | 3000K-4000K-5000K | 3000K-4000K-5000K | 3000K-4000K-5000K |
| **IP Rating** | IP 20 | IP 20 | IP 20 |
| **Beam Angle:** | 36° | 36° | 36° |
| **Working Temp:** | -35°C ~ +35°C | -35°C ~ +35°C | -35°C ~ +35°C |
| **Class Type:** | Class I | Class I | Class I |
| **Installation** | Ceiling/Wall Mounted | Ceiling/Wall Mounted | Ceiling/Wall Mounted |
| **Warranty** | 3 Years | 3 Years | 3 Years |

LED LITE™
Energy Saving LED

# LTSS10/20/30CCT

## LED Surface Mounted Spot Light CCT Changeable

## Dimensions:

### LTSS10

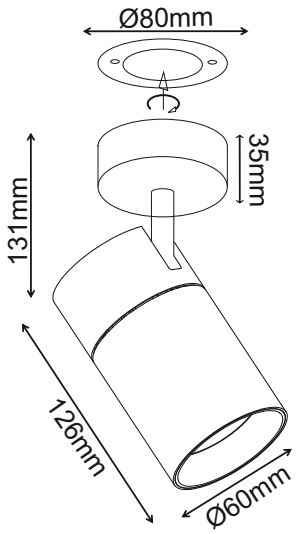


### LTSS20

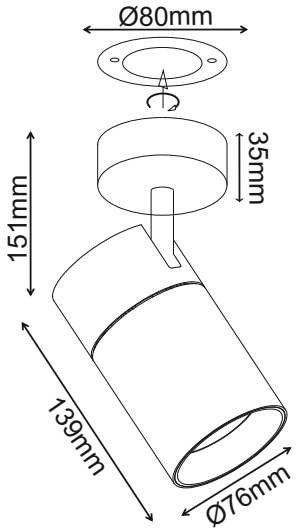


### LTSS30

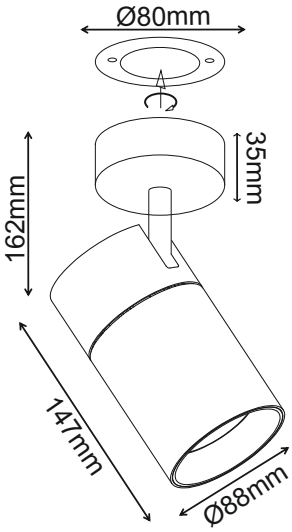


## Packaging Information:

| Part No | LTSS10CCT | LTSS20CCT | LTS30CCT |
|---|---|---|---|
| Qty Per Inner carton | 1 | 1 | 1 |
| Qty Per Outer Carton | 20 | 20 | 20 |
| Product Dimensions | 60*126*131mm | 76*139*151mm | 88*147*162mm |
| Inner Carton Dimensions | 145*125*80mm | 145*190*80mm | 160*950*200mm |
| Outer Carton Dimensions | 46*33*31cm | 43*32*35cm | 50*34.5*36.5cm |
| Weight of Product | 420g | 580g | 720g |
| Weight of Inner Carton | 480g | 610kg | 770g |
| Weight of Outer Carton | 9. 62kg | 12. 24kg | 15.46kg |

Dimmable

No flickering

-35°C - 35°C Operating